



DX14SA

COOLING CAPACITY:
18,000 - 60,000 BTU/H

ENERGY-EFFICIENT
SPLIT SYSTEM AIR CONDITIONER
UP TO 15 SEER & 12.5 EER



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Performance Data	29
AHRI Ratings	31
Wiring Diagram	55
Dimensions	56
Accessories	56

■ Standard Features

- Energy-efficient scroll compressor
- High-density foam compressor sound blanket
- Advanced Copeland® CoreSense™ technology
- Factory-installed filter drier
- Copper tube / enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- AHRI Certified; ETL Listed

■ Cabinet Features

- Heavy-gauge, galvanized-steel cabinet with grille-style sound control top design
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.

www.daikincomfort.com

	DX14SA 0181A*	DX14SA 0191A*	DX14SA 0241A*	DX14SA 0251A*	DX14SA 0301A*	DX14SA 0311A*
CAPACITIES						
Nominal Cooling (BTU/h)	18,000	18,000	24,000	24,000	30,000	30,000
SEER / EER	14 / 12	14 / 12.2	14 / 12	14 / 12.2	14 / 12	14 / 12.2
Decibels	70	70	70	70	71	71
COMPRESSOR						
RLA	9.0	9.0	10.9	10.9	12.8	12.8
LRA	48	47.5	62.9	62.9	64	67.8
CONDENSER FAN MOTOR						
Horsepower	1/8	1/8	1/12	1/8	1/6	1/6
FLA	0.7	0.7	0.6	0.7	1.1	1.1
REFRIGERATION SYSTEM						
Refrigerant Line Size						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	68	68	70	70	80	90
Shipped with Orifice Size	0.052	0.053	0.057	0.057	0.065	0.063
ELECTRICAL DATA						
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	12	12	14.2	14.3	17.1	17.1
Max. Overcurrent Protection ³	20 amps	20 amps	25 amps	25 amps	25 amps	25 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	131	131	131	131	162	162
Ship Weight (lbs)	146	146	146	146	180	180

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes.

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 7/8" to 1 1/4" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

	DX14SA 0361A*	DX14SA 0371A*	DX14SA 0421A*	DX14SA 0431A*	DX14SA 0481A*	DX14SA 0601A*
CAPACITIES						
Nominal Cooling (BTU/h)	36,000	36,000	42,000	42,000	48,000	60,000
SEER / EER	14 / 12	14 / 12.2	14 / 12	14 / 12.2	14 / 11.7	14 / 11.7
Decibels	72	72	73	73	73	74
COMPRESSOR						
RLA	14.1	14.1	16.7	16.7	19.9	25.0
LRA	77	72.2	79	79	109	134
CONDENSER FAN MOTOR						
Horsepower	1/6	1/6	1/6	1/6	1/4	1/4
FLA	1.1	1.1	1.1	1.1	1.5	1.5
REFRIGERATION SYSTEM						
Refrigerant Line Size						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	80	89	112	112	131	125
Shipped with Orifice Size	0.068	0.071	0.074	0.074	0.078	0.088
ELECTRICAL DATA						
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	18.7	18.7	22	22	26.4	32.8
Max. Overcurrent Protection ³	30 amps	30 amps	35 amps	35 amps	45 amps	50 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	162	162	189	189	220	260
Ship Weight (lbs)	180	180	207	207	242	280

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes.

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

IDB		OUTDOOR AMBIENT TEMPERATURE															115														
		65					75					85					95					105					115				
		ENTERING INDOOR WET BULB TEMPERATURE																													
AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
525	MBh	18.3	18.6	19.1	-	18.1	18.4	19.0	-	17.7	17.9	18.5	-	16.8	17.1	17.7	-	15.8	16.1	16.6	-	14.9	15.2	15.7	-	14.9	15.2	15.7	-		
	S/T	0.57	0.50	0.37	-	0.58	0.51	0.38	-	0.60	0.53	0.40	-	0.62	0.55	0.42	-	1.00	0.57	0.44	-	1.00	0.62	0.49	-	1.00	0.62	0.49	-		
	ΔT	20	18	15	-	20	18	15	-	20	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-		
	KW	1.09	1.09	1.09	-	1.22	1.22	1.21	-	1.36	1.36	1.35	-	1.51	1.51	1.50	-	1.68	1.68	1.67	-	1.87	1.87	1.87	-	1.87	1.87	1.87	-		
	Amps	4.0	4.0	4.0	-	4.6	4.6	4.6	-	5.2	5.2	5.2	-	5.9	5.9	5.9	-	6.7	6.7	6.7	-	7.6	7.6	7.6	-	7.6	7.6	7.6	-		
600	HI PR	243	244	246	-	282	283	284	-	322	323	325	-	365	366	368	-	412	413	415	-	462	463	464	-	462	463	464	-		
	LO PR	122	123	126	-	129	131	134	-	136	137	140	-	141	143	146	-	147	148	151	-	153	155	158	-	153	155	158	-		
	MBh	18.6	18.8	19.4	-	18.4	18.6	19.2	-	17.9	18.2	18.7	-	17.1	17.3	17.9	-	16.1	16.3	16.9	-	15.2	15.4	16.0	-	15.2	15.4	16.0	-		
	S/T	0.63	0.56	0.43	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.68	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-		
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-	20	18	15	-		
675	KW	1.10	1.10	1.10	-	1.22	1.22	1.22	-	1.36	1.36	1.36	-	1.51	1.51	1.51	-	1.68	1.68	1.68	-	1.88	1.88	1.88	-	1.88	1.88	1.88	-		
	Amps	4.0	4.0	4.0	-	4.6	4.6	4.6	-	5.2	5.2	5.2	-	5.9	5.9	5.9	-	6.7	6.7	6.7	-	7.6	7.6	7.6	-	7.6	7.6	7.6	-		
	HI PR	245	246	248	-	284	285	286	-	324	325	327	-	367	368	370	-	414	415	417	-	464	465	466	-	464	465	466	-		
	LO PR	115	119	129	-	118	122	133	-	122	126	138	-	126	130	141	-	128	132	144	-	131	135	148	-	131	135	148	-		
	MBh	18.8	19.1	19.6	-	18.7	18.9	19.5	-	18.2	18.5	19.0	-	17.4	17.6	18.2	-	16.4	16.6	17.2	-	15.5	15.7	16.3	-	15.5	15.7	16.3	-		
70	S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-		
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	19	17	14	-		
	KW	1.10	1.10	1.10	-	1.23	1.23	1.23	-	1.37	1.37	1.37	-	1.52	1.52	1.52	-	1.69	1.69	1.69	-	1.89	1.89	1.88	-	1.89	1.89	1.88	-		
	Amps	4.1	4.0	4.0	-	4.6	4.6	4.6	-	5.3	5.3	5.2	-	6.0	5.9	5.9	-	6.7	6.7	6.7	-	7.6	7.6	7.6	-	7.6	7.6	7.6	-		
	HI PR	247	248	250	-	286	287	288	-	326	327	329	-	369	370	372	-	416	417	419	-	466	467	468	-	466	467	468	-		
75	LO PR	126	127	130	-	133	134	138	-	139	141	144	-	145	146	150	-	150	152	155	-	157	159	162	-	157	159	162	-		

75	525	MBh	18.3	18.6	19.1	20.0	18.2	18.4	19.0	19.8	17.7	17.9	18.5	19.3	16.9	17.1	17.7	18.5	15.9	16.1	16.7	17.5	14.9	15.2	15.7	16.6
		S/T	0.70	0.62	0.50	0.36	0.70	0.63	0.50	0.37	1.00	0.65	0.53	0.39	1.00	0.67	0.54	0.41	1.00	0.69	0.57	0.43	1.00	1.00	0.61	0.48
		ΔT	24	22	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16
		KW	1.09	1.09	1.09	1.10	1.22	1.22	1.21	1.22	1.36	1.36	1.35	1.36	1.51	1.51	1.50	1.51	1.68	1.67	1.67	1.68	1.87	1.87	1.87	1.88
		Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.9	5.9	5.9	5.9	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6
600	HI PR	243	244	246	250	282	283	285	289	322	323	325	329	365	366	368	372	412	413	415	419	462	463	465	469	
	LO PR	122	123	126	132	129	131	134	139	136	137	140	145	141	143	146	151	147	148	151	156	153	155	158	163	
	MBh	18.6	18.8	19.4	20.2	18.4	18.7	19.2	20.0	17.9	18.2	18.7	19.6	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.4	16.0	16.8	
	S/T	0.75	0.68	0.55	0.42	0.76	0.69	0.56	0.42	1.00	0.71	0.58	0.45	1.00	0.73	0.60	0.47	1.00	0.75	0.62	0.49	1.00	1.00	0.67	0.54	
	ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	
675	675	KW	1.10	1.10	1.10	1.10	1.22	1.22	1.22	1.23	1.36	1.36	1.36	1.37	1.51	1.51	1.51	1.52	1.68	1.68	1.68	1.69	1.88	1.88	1.88	1.89
		Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.3	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6
		HI PR	246	247	248	253	284	285	287	291	324	325	327	331	367	368	370	374	414	415	417	421	464	465	467	471
		LO PR	124	125	128	133	131	132	136	141	137	139	142	147	143	144	148	153	148	150	153	158	155	157	160	165
		MBh	18.9	19.1	19.7	20.5	18.7	18.9	19.5	20.3	18.2	18.5	19.0	19.9	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1
675	675	S/T	0.79	0.71	0.59	0.45	0.79	0.72	0.59	0.46	1.00	0.74	0.62	0.48	1.00	0.76	0.63	0.50	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57
		ΔT	22	20	17	13	22	20	17	13	23	21	17	14	22	20	17	13	22	20	17	13	23	21	18	14
		KW	1.10	1.10	1.10	1.11	1.23	1.23	1.23	1.24	1.37	1.37	1.37	1.37	1.52	1.52	1.52	1.53	1.69	1.69	1.68	1.69	1.89	1.88	1.88	1.89
		Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.7	5.3	5.3	5.3	5.3	6.0	5.9	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7
		HI PR	248	249	250	255	286	287	289	293	326	327	329	333	369	370	372	376	416	417	419	423	466	467	469	473
675	675	LO PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
525	MBh	18.4	18.7	19.2	20.1	18.3	18.5	19.1	19.9	17.8	18.0	18.6	19.4	17.0	17.2	17.8	18.6	15.9	16.2	16.8	17.6	15.0	15.3	15.8	16.7	15.0	15.3	15.8	16.7	15.0	15.3	15.8	16.7				
	S/T	0.82	0.74	0.62	0.5	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.53	1.00	1.00	0.68	0.6	1.00	1.00	0.73	0.60	1.00	1.00	0.68	0.6	1.00	1.00	0.73	0.60				
	ΔT	28	27	23	19	28	27	23	19	29	27	23	20	28	27	23	19	28	26	23	19	29	27	24	20	28	26	23	19	29	27	24	20				
	KW	1.09	1.09	1.09	1.1	1.22	1.22	1.21	1.22	1.36	1.36	1.35	1.4	1.51	1.51	1.50	1.51	1.68	1.68	1.67	1.7	1.87	1.87	1.87	1.88	1.68	1.68	1.67	1.7	1.87	1.87	1.87	1.88				
	Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.9	5.9	5.9	5.9	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6			
600	HI PR	244	245	247	251	282	283	285	289	322	324	325	329	366	367	369	373	412	414	415	419	462	463	465	469	412	414	415	419	462	463	465	469				
	LO PR	122	124	127	132	130	131	134	140	136	138	141	146	142	143	146	151	147	149	152	157	154	155	158	164	147	149	152	157	154	155	158	164				
	MBh	18.7	18.9	19.5	20.3	18.5	18.8	19.3	20.1	18.0	18.3	18.8	19.7	17.2	17.5	18.0	18.8	16.2	16.4	17.0	17.8	15.3	15.5	16.1	16.9	16.2	16.4	17.0	17.8	15.3	15.5	16.1	16.9				
	S/T	1.00	0.80	0.67	0.5	1.00	0.81	0.68	0.54	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.58	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.65	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.65				
	ΔT	27	25	22	18	27	25	22	18	28	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	27	25	22	18	28	26	23	19				
675	KW	1.10	1.10	1.10	1.1	1.22	1.22	1.22	1.23	1.36	1.36	1.36	1.4	1.51	1.51	1.51	1.52	1.68	1.68	1.68	1.7	1.88	1.88	1.88	1.89	1.68	1.68	1.68	1.7	1.88	1.88	1.88	1.89				
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.3	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6				
	HI PR	246	247	249	253	284	285	287	291	325	326	327	332	368	369	371	375	415	416	417	422	464	465	467	471	415	416	417	422	464	465	467	471				
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	143	145	148	153	149	150	153	159	156	157	160	165	149	150	153	159	156	157	160	165				
	MBh	18.9	19.2	19.8	20.6	18.8	19.0	19.6	20.4	18.3	18.6	19.1	19.9	17.5	17.7	18.3	19.1	16.5	16.7	17.3	18.1	15.6	15.8	16.4	17.2	16.5	16.7	17.3	18.1	15.6	15.8	16.4	17.2				
80	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.62	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69				
	ΔT	26	25	21	17	26	24	21	17	27	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18	26	24	21	17	27	25	22	18				
	KW	1.10	1.10	1.10	1.1	1.23	1.23	1.23	1.24	1.37	1.37	1.37	1.4	1.52	1.52	1.52	1.53	1.69	1.69	1.69	1.7	1.89	1.89	1.88	1.89	1.69	1.69	1.69	1.7	1.89	1.89	1.88	1.89				
	Amps	4.1	4.1	4.0	4.1	4.6	4.6	4.6	4.7	5.3	5.3	5.3	5.3	6.0	6.0	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7				
	HI PR	248	249	251	255	286	287	289	293	327	328	329	334	370	371	373	377	417	418	419	424	466	467	469	473	417	418	419	424	466	467	469	473				
600	LO PR	126	128	131	136	134	135	138	143	140	141	145	150	145	147	150	155	151	152	155	161	158	159	162	167	151	152	155	161	158	159	162	167				

525	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.3	18.9	19.7	17.3	17.5	18.1	18.9	16.3	16.5	17.1	17.9	15.3	15.6	16.1	17.0
	S/T	1.00	0.84	0.71	0.58	1.00	0.85	0.72	0.58	1.00	1.00	0.74	0.61	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	1.00	0.69
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	28	24
	KW	1.09	1.09	1.09	1.10	1.22	1.22	1.22	1.23	1.36	1.36	1.36	1.37	1.51	1.51	1.51	1.52	1.68	1.68	1.68	1.69	1.88	1.88	1.87	1.88
	Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.3	5.9	5.9	5.9	5.9	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6
600	HI PR	245	246	248	252	283	284	286	290	324	325	326	331	367	368	370	374	414	415	416	421	463	464	466	470
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	144	145	148	153	149	150	154	159	156	157	160	165
	MBh	19.0	19.2	19.8	20.6	18.8	19.1	19.6	20.4	18.3	18.6	19.1	20.0	17.5	17.8	18.3	19.1	16.5	16.8	17.3	18.1	15.6	15.8	16.4	17.2
	S/T	1.00	0.90	0.77	0.63	1.00	0.90	0.77	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	1.00	0.75
	ΔT	31	29	26	22	31	29	26	22	31	29	26	22	31	29	26	22	31	29	25	22	32	30	26	23
675	KW	1.10	1.10	1.10	1.11	1.23	1.23	1.22	1.23	1.37	1.36	1.36	1.37	1.52	1.52	1.51	1.52	1.69	1.68	1.68	1.69	1.88	1.88	1.88	1.89
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.3	5.2	5.2	5.3	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.7
	HI PR	247	248	250	254	285	287	288	292	326	327	328	333	369	370	372	376	416	417	418	423	465	467	468	472
	LO PR	126	127	131	136	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	160	157	159	162	167
	MBh	19.3	19.5	20.1	20.9	19.1	19.4	19.9	20.7	18.6	18.9	19.4	20.3	17.8	18.1	18.6	19.4	16.8	17.0	17.6	18.4	15.9	16.1	16.7	17.5
85	S/T	1.00	0.93	0.80	0.66	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.78
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	26	22
	KW	1.11	1.11	1.10	1.11	1.23	1.23	1.23	1.24	1.37	1.37	1.37	1.38	1.52	1.52	1.52	1.53	1.69	1.69	1.69	1.70	1.89	1.89	1.89	1.90
	Amps	4.1	4.1	4.1	4.1	4.6	4.6	4.6	4.7	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.7
	HI PR	249	250	252	256	287	289	290	294	328	329	330	335	371	372	374	378	418	419	420	425	467	469	470	474
85	LO PR	128	129	133	138	135	137	140	145	142	143	146	152	147	149	152	157	153	154	157	162	159	161	164	169

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	550	MBh	18.1	18.4	18.9	-	18.0	18.2	18.8	-	17.5	17.8	18.3	-	16.7	17.0	17.5	-	15.7	16.0	16.5	-	14.8	15.1	15.6	-	14.8	15.1	15.6	-	14.8	15.1	15.6	-			
		S/T	0.65	0.57	0.44	-	0.65	0.58	0.45	-	0.68	0.60	0.47	-	1.00	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-	1.00	0.69	0.56	-	1.00	0.69	0.56	-			
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-			
		KW	1.05	1.05	1.05	-	1.17	1.17	1.16	-	1.30	1.30	1.29	-	1.44	1.44	1.43	-	1.59	1.59	1.59	-	1.78	1.78	1.77	-	1.78	1.78	1.77	-	1.78	1.78	1.77	-			
		Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.6	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-			
70	600	Hi PR	240	241	242	-	277	278	280	-	316	318	319	-	359	360	362	-	404	405	407	-	453	454	456	-	453	454	456	-	453	454	456	-			
		LO PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-			
		MBh	18.3	18.6	19.1	-	18.2	18.4	19.0	-	17.7	18.0	18.5	-	16.9	17.2	17.7	-	15.9	16.2	16.7	-	15.0	15.3	15.8	-	15.0	15.3	15.8	-	15.0	15.3	15.8	-			
		S/T	0.67	0.60	0.47	-	0.68	0.61	0.47	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-			
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-			
70	600	KW	1.05	1.05	1.05	-	1.17	1.17	1.17	-	1.30	1.30	1.30	-	1.44	1.44	1.44	-	1.60	1.60	1.59	-	1.78	1.78	1.78	-	1.78	1.78	1.78	-	1.78	1.78	1.78	-			
		Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-			
		Hi PR	241	242	244	-	279	280	281	-	318	319	321	-	360	361	363	-	406	407	409	-	455	456	457	-	455	456	457	-	455	456	457	-			
		LO PR	126	128	131	-	133	135	138	-	140	142	145	-	146	147	150	-	151	152	156	-	158	159	162	-	158	159	162	-	158	159	162	-			
		MBh	18.7	18.9	19.5	-	18.5	18.8	19.3	-	18.1	18.3	18.9	-	17.3	17.5	18.1	-	16.3	16.5	17.1	-	15.4	15.6	16.2	-	15.4	15.6	16.2	-	15.4	15.6	16.2	-			
70	675	S/T	0.69	0.62	0.49	-	0.70	0.62	0.49	-	0.72	0.65	0.52	-	1.00	0.67	0.53	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-			
		ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-			
		KW	1.06	1.06	1.06	-	1.18	1.17	1.17	-	1.30	1.30	1.30	-	1.45	1.44	1.44	-	1.60	1.60	1.60	-	1.79	1.79	1.78	-	1.79	1.79	1.78	-	1.79	1.79	1.78	-			
		Amps	3.9	3.9	3.9	-	4.5	4.5	4.5	-	5.1	5.1	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.3	7.3	7.2	-	7.3	7.3	7.2	-	7.3	7.3	7.2	-			
		Hi PR	243	244	246	-	281	282	283	-	320	321	323	-	362	363	365	-	408	409	411	-	457	458	459	-	457	458	459	-	457	458	459	-			
70	675	LO PR	128	130	133	-	136	137	141	-	142	144	147	-	148	149	153	-	153	155	158	-	160	162	165	-	160	162	165	-	160	162	165	-			
		75	550	MBh	18.2	18.4	18.9	19.8	18.0	18.2	18.8	19.6	17.5	17.8	18.3	19.1	16.7	17.0	17.5	18.3	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4	
				S/T	0.77	0.70	0.57	0.43	0.78	0.70	0.57	0.43	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.80	0.69	0.55	1.00	0.77	0.64	0.50	1.00	0.80	0.69	0.55	
				ΔT	24	22	18	15	24	22	18	15	24	22	19	15	24	22	18	14	23	21	17	13	25	23	19	16	24	22	18	14	25	23	19	16	
				KW	1.05	1.05	1.05	1.06	1.17	1.16	1.16	1.17	1.30	1.29	1.29	1.30	1.44	1.43	1.43	1.44	1.59	1.59	1.59	1.60	1.78	1.78	1.77	1.78	1.59	1.59	1.59	1.60	1.78	1.78	1.77	1.78	
Amps	3.9			3.9	3.9	3.9	4.4	4.4	4.4	4.4	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2			
75	600	Hi PR	240	241	243	247	277	278	280	284	317	318	319	324	359	360	362	366	405	406	407	411	453	454	456	460	405	406	407	413	455	456	457	462			
		LO PR	125	126	129	134	132	134	137	142	139	140	143	148	144	146	149	154	150	151	154	159	156	158	161	166	150	151	154	159	156	158	161	166			
		MBh	18.4	18.6	19.1	20.0	18.2	18.4	19.0	19.8	17.7	18.0	18.5	19.3	16.9	17.2	17.7	18.5	15.9	16.2	16.7	17.5	15.0	15.3	15.8	16.6	15.9	16.2	16.7	17.5	15.0	15.3	15.8	16.6			
		S/T	0.80	0.73	0.59	0.45	1.00	0.73	0.60	0.46	1.00	0.76	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.53	1.00	0.80	0.71	0.58	1.00	0.80	0.66	0.53	1.00	0.80	0.71	0.58			
		ΔT	23	21	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	17	13	24	22	19	15	24	22	18	14	24	22	19	15			
75	600	KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.59	1.60	1.78	1.78	1.78	1.79	1.60	1.60	1.59	1.60	1.78	1.78	1.78	1.79			
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.4	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3			
		Hi PR	241	242	244	248	279	280	282	286	318	319	321	325	360	361	363	367	406	407	409	413	455	456	457	462	406	407	409	413	455	456	457	462			
		LO PR	126	128	131	136	133	135	138	143	140	142	145	150	146	147	150	155	151	153	156	161	158	159	162	168	151	153	156	161	158	159	162	168			
		MBh	18.7	19.0	19.5	20.3	18.5	18.8	19.3	20.2	18.1	18.3	18.9	19.7	17.3	17.5	18.1	18.9	16.3	16.5	17.1	17.9	15.4	15.6	16.2	17.0	15.4	15.6	16.2	17.1	15.4	15.6	16.2	17.0			
75	675	S/T	0.82	0.74	0.61	0.47	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	0.80	0.68	0.54	1.00	0.80	0.73	0.59	1.00	0.80	0.68	0.54	1.00	0.80	0.73	0.59			
		ΔT	22	20	17	13	22	20	17	13	23	21	17	13	22	20	17	13	22	20	16	13	23	21	18	14	22	20	16	13	23	21	18	14			
		KW	1.06	1.06	1.06	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.78	1.78	1.79	1.60	1.60	1.60	1.61	1.79	1.78	1.78				

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	550	MBh	18.2	18.5	19.0	19.8	18.1	18.3	18.9	19.7	17.6	17.9	18.4	19.2	16.8	17.1	17.6	18.4	15.8	16.1	16.6	17.4	14.9	15.2	15.7	16.5	14.9	15.2	15.7	16.5	14.9	15.2	15.7	16.5			
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67				
	ΔT	28	26	23	19	28	26	23	19	29	27	23	19	28	26	23	19	28	26	22	19	29	27	24	20	28	26	22	19	29	27	24	20				
	KW	1.05	1.05	1.05	1.1	1.17	1.17	1.16	1.17	1.30	1.30	1.29	1.3	1.44	1.44	1.43	1.44	1.59	1.59	1.59	1.59	1.6	1.78	1.78	1.77	1.78	1.6	1.78	1.78	1.77	1.78	1.6	1.78	1.77	1.78		
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2	6.4	7.2	7.2	7.2	7.2	7.2	7.2	7.2			
	HI PR	240	241	243	247	278	279	281	285	317	318	320	324	359	360	362	366	405	406	408	412	454	455	456	461	405	406	408	412	454	455	456	461				
	LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	150	152	155	160	157	158	162	167				
80	600	MBh	18.4	18.7	19.2	20.0	18.3	18.5	19.1	19.9	17.8	18.1	18.6	19.4	17.0	17.3	17.8	18.6	16.0	16.3	16.8	17.6	15.1	15.4	15.9	16.7	15.1	15.4	15.9	16.7	15.1	15.4	15.9	16.7			
	S/T	1.00	0.85	0.72	0.6	1.00	0.85	0.72	0.58	1.00	0.88	0.75	0.6	1.00	1.00	0.76	0.63	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.70	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.70				
	ΔT	28	26	22	18	28	26	22	18	28	26	22	19	28	26	22	18	27	25	22	18	28	27	23	19	28	27	22	18	28	27	23	19				
	KW	1.05	1.05	1.05	1.1	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.59	1.6	1.78	1.78	1.78	1.79	1.6	1.78	1.78	1.78	1.6	1.78	1.78	1.79			
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3				
	HI PR	242	243	244	249	279	280	282	286	319	320	321	325	361	362	364	368	406	408	409	413	455	456	458	462	406	408	409	413	455	456	458	462				
	LO PR	127	128	131	136	134	136	139	144	141	142	145	150	146	148	151	156	152	153	156	161	158	160	163	168	152	153	156	161	158	160	163	168				
675	MBh	18.8	19.1	19.6	20.4	18.6	18.9	19.4	20.2	18.2	18.4	19.0	19.8	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1	15.5	15.7	16.3	17.1	15.5	15.7	16.3	17.1				
	S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71				
	ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	26	24	21	17	28	26	22	18				
	KW	1.06	1.06	1.06	1.1	1.18	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.45	1.44	1.44	1.45	1.60	1.60	1.60	1.60	1.6	1.79	1.78	1.78	1.79	1.6	1.79	1.78	1.78	1.79	1.6	1.79	1.78	1.79		
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	6.4	6.4	6.4	6.4	7.3	7.3	7.2	7.3				
	HI PR	244	245	247	251	281	282	284	288	321	322	323	328	363	364	366	370	409	410	411	416	457	458	460	464	409	410	411	416	457	458	460	464				
	LO PR	129	130	134	139	136	138	141	146	143	144	148	153	149	150	153	158	154	155	159	164	161	162	165	171	154	155	159	164	161	162	165	171				

85	550	MBh	18.5	18.8	19.3	20.2	18.4	18.6	19.2	20.0	17.9	18.2	18.7	19.5	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8
		S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
		ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	27	24
		KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.17	1.30	1.30	1.30	1.30	1.44	1.44	1.44	1.44	1.60	1.59	1.59	1.60	1.78	1.78	1.78	1.79
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3
	HI PR	241	242	244	248	279	280	282	286	318	319	321	325	361	362	363	367	406	407	409	413	455	456	458	462	
	LO PR	127	128	132	137	134	136	139	144	141	143	146	151	147	148	151	156	152	153	157	162	159	160	163	169	
	600	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.4	18.9	19.7	17.3	17.6	18.1	18.9	16.3	16.6	17.1	17.9	15.4	15.7	16.2	17.0
		S/T	1.00	0.95	0.81	0.67	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.75	1.00	1.00	1.00	0.80
		ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	26	22	32	30	27	23
KW		1.06	1.06	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.78	1.78	1.78	1.79	
Amps		3.9	3.9	3.9	3.9	4.5	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	
675	HI PR	243	244	246	250	280	281	283	287	320	321	322	327	362	363	365	369	408	409	410	414	456	457	459	463	
	LO PR	128	130	133	138	136	137	141	146	142	144	147	152	148	149	153	158	153	155	158	163	160	162	165	170	
	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.76	1.00	1.00	1.00	0.81	
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	
675	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.30	1.31	1.45	1.45	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.3	
	HI PR	245	246	248	252	283	284	285	289	322	323	325	329	364	365	367	371	410	411	412	417	458	459	461	465	
	LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	160	166	163	164	167	172	

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	
700	MBh	24.5	24.9	25.6	-	-	24.3	24.7	25.4	-	-	23.7	24.0	24.7	-	-	22.6	22.9	23.7	-	-	21.3	21.6	22.3	-	-	20.1	20.4	21.1	-	
	S/T	0.63	0.56	0.43	-	-	0.63	0.56	0.43	-	-	0.66	0.59	0.46	-	-	0.68	0.60	0.48	-	-	1.00	0.62	0.50	-	-	1.00	0.67	0.55	-	
	ΔT	20	18	15	-	-	20	18	15	-	-	21	19	15	-	-	20	18	15	-	-	20	18	14	-	-	21	19	16	-	
	KW	1.41	1.40	1.40	-	-	1.57	1.57	1.57	-	-	1.75	1.75	1.75	-	-	1.95	1.95	1.95	-	-	2.17	2.17	2.17	-	-	2.43	2.43	2.43	-	
	Amps	5.3	5.3	5.2	-	-	6.0	6.0	6.0	-	-	6.9	6.8	6.8	-	-	7.8	7.8	7.7	-	-	8.8	8.8	8.8	-	-	10.0	10.0	10.0	-	
800	HI PR	253	254	256	-	-	293	294	296	-	-	334	335	337	-	-	379	380	382	-	-	427	428	430	-	-	478	480	481	-	
	LO PR	121	123	126	-	-	128	130	133	-	-	135	136	139	-	-	140	142	145	-	-	145	147	150	-	-	152	153	156	-	
	MBh	25.0	25.3	26.0	-	-	24.8	25.1	25.8	-	-	24.1	24.5	25.2	-	-	23.0	23.4	24.1	-	-	21.7	22.1	22.8	-	-	20.5	20.8	21.6	-	
	S/T	0.66	0.59	0.46	-	-	0.67	0.60	0.47	-	-	0.69	0.62	0.49	-	-	0.71	0.64	0.51	-	-	1.00	0.66	0.53	-	-	1.00	0.71	0.58	-	
	ΔT	19	17	14	-	-	19	17	13	-	-	19	17	14	-	-	19	17	13	-	-	19	17	13	-	-	20	18	14	-	
800	KW	1.41	1.41	1.41	-	-	1.58	1.58	1.57	-	-	1.76	1.76	1.76	-	-	1.96	1.96	1.96	-	-	2.18	2.18	2.18	-	-	2.44	2.44	2.44	-	
	Amps	5.3	5.3	5.3	-	-	6.1	6.0	6.0	-	-	6.9	6.9	6.9	-	-	7.8	7.8	7.8	-	-	8.8	8.8	8.8	-	-	10.0	10.0	10.0	-	
	HI PR	255	257	258	-	-	295	296	298	-	-	337	338	339	-	-	381	382	384	-	-	429	430	432	-	-	481	482	484	-	
	LO PR	123	125	128	-	-	131	132	135	-	-	137	138	141	-	-	142	144	147	-	-	148	149	152	-	-	154	156	159	-	
	900	MBh	25.5	25.9	26.6	-	-	25.3	25.6	26.4	-	-	24.7	25.0	25.7	-	-	23.6	23.9	24.6	-	-	22.3	22.6	23.3	-	-	21.0	21.4	22.1	-
S/T		0.67	0.60	0.47	-	-	0.68	0.60	0.48	-	-	0.70	0.63	0.50	-	-	1.00	0.65	0.52	-	-	1.00	0.67	0.54	-	-	1.00	0.72	0.59	-	
ΔT		18	16	13	-	-	18	16	12	-	-	18	16	13	-	-	18	16	12	-	-	18	16	12	-	-	19	17	13	-	
KW		1.42	1.42	1.42	-	-	1.59	1.58	1.58	-	-	1.77	1.77	1.76	-	-	1.97	1.97	1.96	-	-	2.19	2.19	2.19	-	-	2.45	2.45	2.45	-	
Amps		5.3	5.3	5.3	-	-	6.1	6.1	6.1	-	-	6.9	6.9	6.9	-	-	7.8	7.8	7.8	-	-	8.8	8.8	8.8	-	-	10.0	10.0	10.0	-	
900	HI PR	258	259	261	-	-	298	299	300	-	-	339	340	342	-	-	384	385	387	-	-	432	433	435	-	-	483	484	486	-	
	LO PR	126	127	130	-	-	133	135	138	-	-	140	141	144	-	-	145	146	149	-	-	150	152	155	-	-	157	158	161	-	

700	MBh	24.5	24.9	25.6	26.7	26.7	24.3	24.7	25.4	26.5	26.5	23.7	24.0	24.8	25.9	25.9	22.6	23.0	23.7	24.8	24.8	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2
	S/T	0.75	0.68	0.55	0.42	0.42	0.76	0.68	0.56	0.42	0.42	1.00	0.71	0.58	0.44	0.44	1.00	0.73	0.60	0.46	0.46	1.00	0.75	0.62	0.48	1.00	0.80	0.67	0.53
	ΔT	25	23	19	15	15	25	23	19	15	15	25	23	19	15	15	25	23	19	15	15	24	22	19	15	26	24	20	16
	KW	1.40	1.40	1.40	1.41	1.41	1.57	1.57	1.56	1.58	1.58	1.75	1.75	1.75	1.76	1.76	1.95	1.95	1.95	1.96	1.96	2.17	2.17	2.17	2.18	2.43	2.43	2.43	2.44
	Amps	5.3	5.2	5.2	5.3	5.3	6.0	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	6.9	7.8	7.8	7.7	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	9.9	10.0
800	HI PR	253	254	256	261	261	293	294	296	300	300	334	335	337	342	342	379	380	382	386	386	427	428	430	434	479	480	481	486
	LO PR	121	123	126	131	131	128	130	133	138	138	135	136	139	144	144	140	142	145	150	150	145	147	150	155	152	153	157	162
	MBh	25.0	25.3	26.1	27.2	27.2	24.8	25.1	25.8	26.9	26.9	24.1	24.5	25.2	26.3	26.3	23.1	23.4	24.1	25.2	25.2	21.7	22.1	22.8	23.9	20.5	20.9	21.6	22.7
	S/T	0.78	0.71	0.58	0.45	0.45	0.79	0.72	0.59	0.46	0.46	1.00	0.74	0.61	0.48	0.48	1.00	0.76	0.63	0.50	0.50	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57
	ΔT	24	22	18	14	14	24	22	18	14	14	24	22	18	14	14	24	22	18	14	14	23	21	18	14	25	23	19	15
800	KW	1.41	1.41	1.41	1.42	1.42	1.58	1.58	1.57	1.59	1.59	1.76	1.76	1.76	1.77	1.77	1.96	1.96	1.96	1.97	1.97	2.18	2.18	2.18	2.19	2.44	2.44	2.44	2.45
	Amps	5.3	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0
	HI PR	256	257	259	263	263	295	296	298	303	303	337	338	340	344	344	381	383	384	389	389	430	431	432	437	481	482	484	488
	LO PR	123	125	128	133	133	131	132	135	140	140	137	138	141	147	147	142	144	147	152	152	148	149	152	157	154	156	159	164
	900	MBh	25.5	25.9	26.6	27.7	27.7	25.3	25.7	26.4	27.5	27.5	24.7	25.0	25.8	26.9	26.9	23.6	23.9	24.7	25.8	25.8	22.3	22.6	23.3	24.4	21.1	21.4	22.1
S/T		0.79	0.72	0.59	0.46	0.46	1.00	0.73	0.60	0.46	0.46	1.00	0.75	0.62	0.49	0.49	1.00	0.77	0.64	0.51	0.51	1.00	0.79	0.66	0.53	1.00	1.00	0.71	0.57
ΔT		23	21	17	13	13	23	21	17	13	13	23	21	17	13	13	23	21	17	13	13	22	20	17	13	24	22	18	14
KW		1.42	1.42	1.42	1.43	1.43	1.58	1.58	1.58	1.59	1.59	1.77	1.77	1.76	1.78	1.78	1.97	1.96	1.96	1.97	1.97	2.19	2.19	2.18	2.20	2.45	2.45	2.44	2.46
Amps		5.3	5.3	5.3	5.4	5.4	6.1	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.0	7.8	7.8	7.8	7.9	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1
900	HI PR	258	259	261	265	265	298	299	301	305	305	339	340	342	346	346	384	385	387	391	391	432	433	435	439	483	485	486	491
	LO PR	126	127	130	136	136	133	135	138	143	143	140	141	144	149	149	145	146	149	155	155	150	152	155	160	157	158	161	166

		Outdoor Ambient Temperature												115																							
		65						75						85						95						105						115					
IDB	Airflow	Entering Indoor Wet Bulb Temperature																																			
700	MBh	24.0	24.4	25.1	26.2	23.8	24.2	24.9	26.0	23.2	23.6	24.3	25.3	22.2	22.5	23.2	24.3	20.9	21.2	21.9	23.0	19.7	20.0	20.7	21.8												
	S/T	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.7	0.6	1.0	1.0	0.8	0.7												
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	28	26	23	19	30	28	24	20												
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.9	1.9	1.9	1.9	2.2	2.2	2.1	2.2	2.4	2.4	2.4	2.4												
	Amps	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9												
800	Hi PR	255	256	258	262	294	296	297	302	336	337	339	343	381	382	384	388	429	430	432	437	481	482	484	488												
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	143	145	148	153	149	150	153	159	156	157	160	165												
	MBh	24.5	24.8	25.5	26.6	24.3	24.6	25.3	26.4	23.7	24.0	24.7	25.8	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.2	22.2												
	S/T	1.0	0.8	0.7	0.6	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.7												
	ΔT	28	26	22	18	28	26	22	18	28	26	22	18	27	26	22	18	27	25	22	18	28	26	23	19												
900	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4												
	Amps	5.2	5.2	5.2	5.3	6.0	5.9	5.9	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.8	9.8	9.9												
	Hi PR	257	258	260	264	297	298	300	304	338	340	341	346	383	384	386	391	432	433	435	439	483	484	486	490												
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	159	163	168												
	MBh	25.0	25.3	26.1	27.1	24.8	25.1	25.8	26.9	24.2	24.5	25.2	26.3	23.1	23.5	24.2	25.2	21.8	22.2	22.9	23.9	20.6	21.0	21.7	22.8												
80	S/T	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7												
	ΔT	27	25	21	17	27	25	21	17	27	25	21	17	26	25	21	17	26	24	21	17	27	25	22	18												
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.8	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4												
	Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9												
	Hi PR	260	261	262	267	299	300	302	307	341	342	344	348	386	387	389	393	434	435	437	441	486	487	489	493												
900	LO PR	129	131	134	139	136	138	141	146	143	144	148	153	148	150	153	158	154	155	158	164	161	162	165	170												

	85																															
	700																															
	MBh	24.4	24.8	25.5	26.6	24.2	24.6	25.3	26.4	23.6	24.0	24.7	25.7	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2							
	S/T	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8				
	ΔT	33	31	27	23	32	31	27	23	33	31	27	23	32	31	27	23	32	30	27	23	33	31	28	24	32	30	27	23			
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.9	1.9	1.9	1.9	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4			
	800																															
	MBh	24.9	25.2	25.9	27.0	24.7	25.0	25.7	26.8	24.1	24.4	25.1	26.2	23.0	23.3	24.0	25.1	21.7	22.0	22.7	23.8	20.5	20.8	21.5	22.6							
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8				
	ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	25	22	32	30	27	23	32	30	27	23			
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.7	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4			
	Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.8	9.9	9.8	9.8	9.9	9.9			
	900																															
	MBh	25.4	25.7	26.4	27.5	25.2	25.5	26.2	27.3	24.6	24.9	25.6	26.7	23.5	23.9	24.6	25.6	22.2	22.6	23.3	24.3	21.0	21.4	22.1	23.2							
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8				
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	24	21	31	29	26	22	32	30	27	23			
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.8	1.8	1.8	2.0	2.0	2.0	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4			
	Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.8	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9	9.8	9.8	9.9	9.9			
	Hi PR	261	262	264	268	300	302	303	308	342	343	345	349	387	388	390	394	435	436	438	443	487	488	490	494							
	LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	160	165	162	164	167	172							

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE												105												115											
		65						75						85						95						105						115					
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																		ENTERING INDOOR WET BULB TEMPERATURE																	
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
700	MBh	24.5	24.9	25.6	-	24.3	24.7	25.4	-	23.7	24.0	24.7	-	22.6	22.9	23.7	-	21.3	21.6	22.3	-	20.1	20.4	21.1	-	20.1	20.4	21.1	-	20.1	20.4	21.1	-				
	S/T	0.63	0.56	0.43	-	0.63	0.56	0.43	-	0.66	0.59	0.46	-	0.68	0.60	0.48	-	1.00	0.62	0.50	-	1.00	0.67	0.55	-	1.00	0.67	0.55	-	1.00	0.67	0.55	-				
	ΔT	20	18	15	-	20	18	15	-	21	19	15	-	20	18	15	-	20	18	14	-	21	19	16	-	21	19	16	-	21	19	16	-				
	KW	1.41	1.40	1.40	-	1.57	1.57	1.57	-	1.75	1.75	1.75	-	1.95	1.95	1.95	-	2.17	2.17	2.17	-	2.43	2.43	2.43	-	2.43	2.43	2.43	-	2.43	2.43	2.43	-				
	Amps	5.3	5.3	5.2	-	6.0	6.0	6.0	-	6.9	6.8	6.8	-	7.8	7.8	7.7	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-				
800	MBh	25.0	25.3	26.0	-	24.8	25.1	25.8	-	24.1	24.5	25.2	-	23.0	23.4	24.1	-	21.7	22.1	22.8	-	20.5	20.8	21.6	-	20.5	20.8	21.6	-	20.5	20.8	21.6	-				
	S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-				
	ΔT	19	17	14	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-				
	KW	1.41	1.41	1.41	-	1.58	1.58	1.57	-	1.76	1.76	1.76	-	1.96	1.96	1.96	-	2.18	2.18	2.18	-	2.44	2.44	2.44	-	2.44	2.44	2.44	-	2.44	2.44	2.44	-				
	Amps	5.3	5.3	5.3	-	6.1	6.0	6.0	-	6.9	6.9	6.9	-	7.8	7.8	7.8	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-				
900	MBh	25.5	25.9	26.6	-	25.3	25.6	26.4	-	24.7	25.0	25.7	-	23.6	23.9	24.6	-	22.3	22.6	23.3	-	21.0	21.4	22.1	-	21.0	21.4	22.1	-	21.0	21.4	22.1	-				
	S/T	0.67	0.60	0.47	-	0.68	0.60	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-				
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-				
	KW	1.42	1.42	1.42	-	1.59	1.58	1.58	-	1.77	1.77	1.76	-	1.97	1.97	1.96	-	2.19	2.19	2.19	-	2.45	2.45	2.45	-	2.45	2.45	2.45	-	2.45	2.45	2.45	-				
	Amps	5.3	5.3	5.3	-	6.1	6.1	6.1	-	6.9	6.9	6.9	-	7.8	7.8	7.8	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-				
75	MBh	24.5	24.9	25.6	26.7	24.3	24.7	25.4	26.5	23.7	24.0	24.8	25.9	22.6	23.0	23.7	24.8	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2	21.3	21.6	22.3	23.4	20.5	20.9	21.6	22.7				
	S/T	0.75	0.68	0.55	0.42	0.76	0.68	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.80	0.67	0.53	1.00	0.75	0.62	0.48	1.00	0.80	0.67	0.53				
	ΔT	25	23	19	15	25	23	19	15	25	23	19	15	25	23	19	15	24	22	19	15	26	24	20	16	24	22	19	15	26	24	20	16				
	KW	1.40	1.40	1.40	1.41	1.57	1.57	1.56	1.58	1.75	1.75	1.75	1.76	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.18	2.43	2.43	2.43	2.44	2.17	2.17	2.17	2.18	2.43	2.43	2.43	2.44				
	Amps	5.3	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.8	7.8	7.7	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0				
800	MBh	25.0	25.3	26.1	27.2	24.8	25.1	25.8	26.9	24.1	24.5	25.2	26.3	23.1	23.4	24.1	25.2	21.7	22.1	22.8	23.9	20.5	20.9	21.6	22.7	21.7	22.1	22.8	23.9	20.5	20.9	21.6	22.7				
	S/T	0.78	0.71	0.58	0.45	0.79	0.72	0.59	0.46	1.00	0.74	0.61	0.48	1.00	0.76	0.63	0.50	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57				
	ΔT	24	22	18	14	24	22	18	14	24	22	18	14	24	22	18	14	23	21	18	14	25	23	19	15	23	21	18	14	25	23	19	15				
	KW	1.41	1.41	1.41	1.42	1.58	1.58	1.57	1.59	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.44	2.44	2.44	2.45	2.18	2.18	2.18	2.19	2.44	2.44	2.44	2.45				
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0				
900	MBh	25.5	25.9	26.6	27.7	25.3	25.7	26.4	27.5	24.7	25.0	25.8	26.9	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.1	21.4	22.1	23.2	22.3	22.6	23.3	24.4	21.1	21.4	22.1	23.2				
	S/T	0.79	0.72	0.59	0.46	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.51	1.00	0.79	0.66	0.53	1.00	1.00	0.71	0.57	1.00	0.79	0.66	0.53	1.00	1.00	0.71	0.57				
	ΔT	23	21	17	13	23	21	17	13	23	21	17	13	23	21	17	13	22	20	17	13	24	22	18	14	22	20	17	13	24	22	18	14				
	KW	1.42	1.42	1.42	1.43	1.58	1.58	1.58	1.59	1.77	1.77	1.76	1.78	1.97	1.96	1.96	1.97	2.19	2.19	2.18	2.20	2.45	2.45	2.44	2.46	2.19	2.19	2.18	2.20	2.45	2.45	2.44	2.46				
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.1	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.1				
75	MBh	25.5	25.9	26.6	27.7	25.3	25.7	26.4	27.5	24.7	25.0	25.8	26.9	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.1	21.4	22.1	23.2	22.3	22.6	23.3	24.4	21.1	21.4	22.1	23.2				
	S/T	0.79	0.72	0.59	0.46	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.51	1.00	0.79	0.66	0.53	1.00	1.00	0.71	0.57	1.00	0.79	0.66	0.53	1.00	1.00	0.71	0.57				
	ΔT	23	21	17	13	23	21	17	13	23	21	17	13	23	21	17	13	22	20	17	13	24	22	18	14	22	20	17	13	24	22	18	14				

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
700	MBh	24.7	25.0	25.7	26.8	24.5	24.8	25.5	26.6	23.8	24.2	24.9	26.0	22.7	23.1	23.8	24.9	21.4	21.7	22.5	23.6	20.2	20.5	21.3	22.4	19.0	19.3	20.1	21.2	17.8	18.1	18.9	20.0	16.4	16.7	17.5	18.6
	S/T	0.87	0.80	0.67	0.5	1.00	0.80	0.67	0.54	1.00	0.83	0.70	0.6	1.00	0.84	0.72	0.58	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.65	0.87	0.80	0.67	0.5	1.00	0.83	0.70	0.6	1.00	1.00	0.79	0.65
	ΔT	29	27	23	20	29	27	23	20	29	27	24	20	29	27	23	20	29	27	23	20	29	27	23	21	29	27	23	20	29	27	23	20	29	27	23	21
	KW	1.41	1.40	1.40	1.4	1.57	1.57	1.57	1.58	1.75	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.43	2.43	2.43	2.44	2.28	2.28	2.28	2.28	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.45
	Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.1	6.9	6.8	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0
800	HI PR	254	255	257	261	293	294	296	301	335	336	338	342	380	381	382	387	428	429	431	435	479	480	482	486	529	530	532	536	571	572	574	578	613	614	616	620
	LO PR	122	123	126	131	129	130	133	139	135	137	140	145	141	142	145	150	146	147	150	156	153	154	157	162	157	158	159	161	164	166	168	170	172	174	176	
	MBh	25.1	25.5	26.2	27.3	24.9	25.2	26.0	27.1	24.3	24.6	25.3	26.4	23.2	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	21.0	21.7	22.8	19.0	19.3	20.1	21.2	17.8	18.1	18.9	20.0	16.4	16.7	17.5	18.6
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.62	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69	0.87	0.80	0.67	0.5	1.00	0.83	0.70	0.6	1.00	1.00	0.82	0.69
	ΔT	28	26	22	18	28	26	22	18	28	26	23	19	28	26	22	18	28	26	22	18	29	27	23	19	28	26	22	18	28	26	22	18	29	27	23	19
900	KW	1.41	1.41	1.41	1.4	1.58	1.58	1.57	1.59	1.76	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.45	2.28	2.28	2.28	2.28	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.45
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.0	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.0
	HI PR	256	257	259	263	296	297	299	303	337	338	340	344	382	383	385	389	430	431	433	437	481	483	484	489	531	532	534	538	573	574	576	580	615	616	618	622
	LO PR	124	125	128	133	131	133	136	141	138	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	157	158	159	161	164	166	168	170	172	174	176	
	MBh	25.7	26.0	26.7	27.8	25.4	25.8	26.5	27.6	24.8	25.2	25.9	27.0	23.7	24.1	24.8	25.9	22.4	22.7	23.5	24.6	21.2	21.5	22.2	23.3	19.0	19.3	20.1	21.2	17.8	18.1	18.9	20.0	16.4	16.7	17.5	18.6
900	S/T	1.00	0.84	0.71	0.6	1.00	0.84	0.72	0.58	1.00	0.87	0.74	0.6	1.00	0.88	0.76	0.62	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69	0.87	0.80	0.67	0.5	1.00	0.83	0.70	0.6	1.00	1.00	0.83	0.69
	ΔT	27	25	21	17	27	25	21	17	27	25	22	18	27	25	21	17	27	25	21	17	28	26	22	18	27	25	21	17	27	25	21	17	28	26	22	18
	KW	1.42	1.42	1.42	1.4	1.58	1.58	1.58	1.59	1.77	1.77	1.76	1.8	1.97	1.97	1.96	1.98	2.19	2.19	2.19	2.2	2.45	2.45	2.45	2.46	2.28	2.28	2.28	2.28	2.19	2.19	2.19	2.2	2.45	2.45	2.45	2.46
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1	8.8	8.8	8.8	8.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1
	HI PR	259	260	261	266	298	299	301	305	340	341	343	347	384	385	387	392	433	434	435	440	484	485	487	491	533	534	536	540	575	576	578	582	617	618	620	624
900	LO PR	126	128	131	136	134	135	138	143	140	142	145	150	145	147	150	155	151	152	155	160	157	159	162	167	157	158	159	161	164	166	168	170	172	174	176	

700	MBh	25.1	25.4	26.1	27.2	24.9	25.2	25.9	27.0	24.2	24.6	25.3	26.4	23.1	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	20.9	21.7	22.8
	S/T	1.00	0.89	0.76	0.63	1.00	0.90	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	1.00	0.75
	ΔT	33	31	27	24	33	31	27	23	33	31	28	24	33	31	27	23	33	31	27	23	34	32	28	24
	KW	1.41	1.41	1.40	1.42	1.57	1.57	1.57	1.58	1.76	1.76	1.75	1.76	1.96	1.95	1.95	1.96	2.18	2.18	2.17	2.19	2.44	2.44	2.43	2.45
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0
800	MBh	25.5	25.9	26.6	27.7	25.3	25.6	26.4	27.5	24.7	25.0	25.7	26.8	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.0	21.4	22.1	23.2
	S/T	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.78
	ΔT	32	30	26	22	32	30	26	22	32	30	26	23	32	30	26	22	32	30	26	22	33	31	27	23
	KW	1.42	1.42	1.41	1.42	1.58	1.58	1.58	1.59	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.19	2.18	2.18	2.19	2.45	2.44	2.44	2.45
	Amps	5.3	5.3	5.3	5.3	6.1	6.1	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1
900	MBh	25.7	25.8	26.0	26.5	29.7	29.8	30.0	30.4	33.8	33.9	34.1	34.6	38.3	38.4	38.6	39.0	43.1	43.2	43.4	43.8	48.3	48.4	48.5	49.0
	Hi PR	126	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	151	154	160	157	158	161	166
	LO PR	26.1	26.4	27.1	28.2	25.9	26.2	26.9	28.0	25.2	25.6	26.3	27.4	24.1	24.5	25.2	26.3	22.8	23.1	23.9	25.0	21.6	21.9	22.7	23.8
	S/T	1.00	0.93	0.81	0.67	1.00	1.00	0.81	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.85	0.72	1.00	1.00	0.87	0.74	1.00	1.00	1.00	0.79
	ΔT	31	29	25	21	31	29	25	21	31	29	25	22	31	29	25	21	31	29	25	21	32	30	26	22
900	KW	1.42	1.42	1.42	1.43	1.59	1.59	1.58	1.60	1.77	1.77	1.77	1.78	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.20	2.45	2.45	2.45	2.46
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.9	8.9	8.9	8.9	10.1	10.0	10.0	10.1
	Hi PR	260	261	263	267	299	300	302	307	341	342	344	348	386	387	388	393	434	435	437	441	485	486	488	492
	LO PR	128	130	133	138	136	137	140	145	142	143	146	151	147	149	152	157	153	154	157	162	159	161	164	169

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	29.3	29.7	30.6	30.3	29.0	29.5	30.3	30.3	28.3	28.7	29.6	29.6	27.0	27.4	28.2	-	25.3	25.8	26.6	-	25.3	25.8	26.6	-	23.9	24.3	25.2	-	23.9	24.3	25.2	-	23.9	24.3	25.2	-
	S/T	0.59	0.52	0.38	-	0.60	0.52	0.39	-	0.62	0.55	0.42	-	1.00	0.57	0.43	-	1.00	0.59	0.46	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	20	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-
	KW	1.76	1.75	1.75	-	1.95	1.95	1.95	-	2.17	2.17	2.17	-	2.41	2.41	2.41	-	2.68	2.68	2.67	-	2.68	2.68	2.67	-	2.99	2.99	2.99	-	2.99	2.99	2.99	-	2.99	2.99	2.99	-
	Amps	6.4	6.4	6.4	-	7.3	7.3	7.3	-	8.3	8.3	8.3	-	9.4	9.4	9.4	-	10.6	10.6	10.6	-	10.6	10.6	10.6	-	12.0	12.0	12.0	-	12.0	12.0	12.0	-	12.0	12.0	12.0	-
1000	MBh	29.7	30.1	31.0	-	29.4	29.8	30.7	-	28.7	29.1	29.9	-	27.3	27.8	28.6	-	25.7	26.1	27.0	-	25.7	26.1	27.0	-	24.3	24.7	25.6	-	24.3	24.7	25.6	-	24.3	24.7	25.6	-
	S/T	0.65	0.58	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-
	KW	1.77	1.77	1.76	-	1.96	1.96	1.96	-	2.18	2.18	2.18	-	2.42	2.42	2.42	-	2.69	2.69	2.68	-	2.69	2.69	2.68	-	3.00	3.00	3.00	-	3.00	3.00	3.00	-	3.00	3.00	3.00	-
	Amps	6.4	6.4	6.4	-	7.3	7.3	7.3	-	8.3	8.3	8.3	-	9.4	9.4	9.4	-	10.6	10.6	10.6	-	10.6	10.6	10.6	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-
1125	MBh	30.1	30.6	31.4	-	29.9	30.3	31.2	-	29.1	29.5	30.4	-	27.8	28.2	29.1	-	26.2	26.6	27.5	-	26.2	26.6	27.5	-	24.7	25.1	26.0	-	24.7	25.1	26.0	-	24.7	25.1	26.0	-
	S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-
	KW	1.78	1.77	1.77	-	1.97	1.97	1.97	-	2.19	2.19	2.19	-	2.43	2.43	2.43	-	2.70	2.70	2.69	-	2.70	2.70	2.69	-	3.01	3.01	3.01	-	3.01	3.01	3.01	-	3.01	3.01	3.01	-
	Amps	6.5	6.5	6.4	-	7.4	7.4	7.3	-	8.4	8.4	8.3	-	9.5	9.5	9.4	-	10.7	10.7	10.7	-	10.7	10.7	10.7	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-
75	MBh	29.7	30.1	31.0	31.7	29.4	29.9	30.7	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.6	30.0	25.8	26.2	27.0	28.4	25.8	26.2	27.0	28.4	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9
	S/T	0.72	0.64	0.51	0.37	0.72	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55
	ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	14	23	21	17	14	23	21	17	14	24	22	18	15	25	23	19	16	25	23	19	16
	KW	1.76	1.75	1.75	1.77	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.18	2.41	2.41	2.41	2.42	2.68	2.68	2.67	2.69	2.68	2.68	2.67	2.69	2.99	2.99	2.99	3.00	2.99	2.99	2.99	3.00	2.99	2.99	3.00	
	Amps	6.4	6.4	6.3	6.4	7.3	7.3	7.3	7.2	8.3	8.3	8.3	8.3	9.4	9.4	9.3	9.4	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	12.0	12.0	12.0	12.1	12.0	12.0	12.0	12.1	12.0	12.0	12.1	
1000	MBh	29.7	30.1	31.0	32.3	29.4	29.9	30.7	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.6	30.0	25.8	26.2	27.0	28.4	25.8	26.2	27.0	28.4	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9
	S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55
	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	23	21	17	14	24	22	18	15	25	23	19	16	25	23	19	16
	KW	1.77	1.76	1.76	1.78	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.70	2.68	2.68	2.67	2.69	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.01	3.00	3.00	3.01	
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1	12.1	12.1	12.0	12.1	12.0	12.1		
1125	MBh	29.7	30.1	31.0	32.3	29.4	29.9	30.7	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.6	30.0	25.8	26.2	27.0	28.4	25.8	26.2	27.0	28.4	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9
	S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55
	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	23	21	17	14	24	22	18	15	25	23	19	16	25	23	19	16
	KW	1.77	1.76	1.76	1.78	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.70	2.68	2.68	2.67	2.69	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.01	3.00	3.00	3.01	
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1	12.1	12.1	12.0	12.1	12.0	12.1		
75	MBh	29.7	30.1	31.0	32.3	29.4	29.9	30.7	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.6	30.0	25.8	26.2	27.0	28.4	25.8	26.2	27.0	28.4	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9
	S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55
	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	23	21	17	14	24	22	18	15	25	23	19	16	25	23	19	16
	KW	1.77	1.76	1.76	1.78	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.70	2.68	2.68	2.67	2.69	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.01	3.00	3.00	3.01	
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1	12.1	12.1	12.0	12.1	12.0	12.1		
1000	MBh	29.7	30.1	31.0	32.3	29.4	29.9	30.7	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.6	30.0	25.8	26.2	27.0	28.4	25.8	26.2	27.0	28.4	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9
	S/T	0.78	0.70	0.57	0.43	0.78	0.71																														

		OUTDOOR AMBIENT TEMPERATURE																																				
		65						75						85						95						105						115						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
875	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.4	28.9	29.7	31.1	27.1	27.5	28.4	29.8	25.5	25.9	26.8	28.1	24.0	24.5	25.3	26.7	24.0	24.5	25.3	26.7	24.0	24.5	25.3	26.7					
	S/T	1.00	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61					
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20	29	27	23	20	29	27	23	20					
	KW	1.76	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.41	2.41	2.41	2.42	2.68	2.68	2.67	2.7	2.99	2.99	2.99	3.00	2.99	2.99	2.99	3.00	2.99	2.99	2.99	2.99	3.00				
	Amps	6.4	6.4	6.3	6.4	7.3	7.3	7.3	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.4	9.4	10.6	10.6	10.6	10.6	12.0	12.0	12.0	12.1	12.0	12.0	12.0	12.1	12.0	12.0	12.0	12.1	12.1	12.1			
1000	Hi PR	250	251	253	257	290	291	292	297	331	332	334	338	375	376	378	382	423	424	426	430	474	475	477	481	474	475	477	481	474	475	477	481	474	475	477	481	
	LO PR	124	126	129	134	132	133	136	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166	156	158	161	166	156	158	161	166	156	158	161	166	
	MBh	29.9	30.3	31.1	32.5	29.6	30.0	30.9	32.2	28.8	29.2	30.1	31.5	27.5	27.9	28.8	30.1	25.9	26.3	27.2	28.5	24.4	24.8	25.7	27.1	24.4	24.8	25.7	27.1	24.4	24.8	25.7	27.1	24.4	24.8	25.7	27.1	
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67	
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19	28	26	22	19	28	26	22	19	28	26	22	19	
80	KW	1.77	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.7	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.01	3.00	3.00	3.00	3.00	3.00	3.01	3.00	3.01	3.00
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1	12.1	12.1	12.0	12.1	12.1	12.1	12.1	12.1	12.0	12.1	12.1	12.1	
	Hi PR	252	253	255	259	292	293	295	299	333	334	336	340	377	378	380	385	425	426	428	432	476	477	479	484	476	477	479	484	476	477	479	484	476	477	479	484	
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	160	163	168	158	160	163	168	158	160	163	168	158	160	163	168	
	MBh	30.3	30.7	31.6	32.9	30.1	30.5	31.3	32.7	29.3	29.7	30.6	31.9	28.0	28.4	29.3	30.6	26.4	26.8	27.7	29.0	24.9	25.3	26.2	27.5	24.9	25.3	26.2	27.5	24.9	25.3	26.2	27.5	24.9	25.3	26.2	27.5	
1125	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18	27	25	21	18	27	25	21	18	27	25	21	18	
	KW	1.78	1.77	1.77	1.8	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.2	2.43	2.43	2.43	2.44	2.70	2.70	2.69	2.7	3.01	3.01	3.01	3.02	3.01	3.01	3.01	3.02	3.01	3.01	3.01	3.01	3.01	3.02	3.02	3.01	3.02
	Amps	6.5	6.5	6.4	6.5	7.4	7.4	7.3	7.4	8.4	8.4	8.3	8.4	9.5	9.5	9.4	9.5	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2	12.1	12.1	12.0	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.1	12.2	
	Hi PR	254	255	257	262	294	295	297	301	335	336	338	342	379	380	382	387	427	428	430	434	478	479	481	486	478	479	481	486	478	479	481	486	478	479	481	486	
85	LO PR	128	130	133	138	136	137	140	146	142	144	147	152	148	149	152	158	153	155	158	163	160	162	165	170	160	162	165	170	160	162	165	170	160	162	165	170	

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	29.1	29.5	30.4	-	28.8	29.2	30.1	-	28.1	28.5	29.4	-	26.8	27.2	28.0	-	25.2	25.6	26.5	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-				
	S/T	0.63	0.55	0.41	-	0.63	0.56	0.42	-	0.66	0.58	0.44	-	0.68	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-				
	ΔT	20	18	15	-	20	18	15	-	20	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-	21	19	16	-				
	KW	1.72	1.72	1.72	-	1.91	1.91	1.91	-	2.13	2.12	2.12	-	2.36	2.35	2.35	-	2.61	2.61	2.61	-	2.92	2.92	2.91	-	2.92	2.92	2.91	-	2.92	2.92	2.91	-				
	Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.0	8.0	-	9.1	9.1	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-				
	Hi PR	244	245	247	-	282	283	285	-	323	324	325	-	366	367	369	-	413	414	416	-	463	464	466	-	463	464	466	-	463	464	466	-				
	Lo PR	123	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-	154	156	159	-				
1000	MBh	29.5	29.9	30.8	-	29.2	29.6	30.5	-	28.5	28.9	29.7	-	27.2	27.6	28.4	-	25.6	26.0	26.8	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-				
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-				
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-	20	18	15	-	20	18	15	-				
	KW	1.73	1.73	1.73	-	1.92	1.92	1.92	-	2.14	2.13	2.13	-	2.37	2.36	2.36	-	2.62	2.62	2.62	-	2.93	2.93	2.92	-	2.93	2.93	2.92	-	2.93	2.93	2.92	-				
	Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-				
	Hi PR	246	247	249	-	284	286	287	-	325	326	328	-	368	369	371	-	415	416	418	-	465	466	468	-	465	466	468	-	465	466	468	-				
	Lo PR	124	126	129	-	132	133	136	-	138	140	143	-	144	145	149	-	149	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-				
1125	MBh	29.9	30.3	31.2	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.6	28.0	28.9	-	26.0	26.4	27.3	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-				
	S/T	0.73	0.65	0.51	-	0.73	0.65	0.51	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.63	-	1.00	0.78	0.63	-	1.00	0.78	0.63	-				
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	19	17	14	-	19	17	14	-				
	KW	1.74	1.74	1.73	-	1.93	1.93	1.92	-	2.14	2.14	2.14	-	2.37	2.37	2.37	-	2.63	2.63	2.63	-	2.94	2.93	2.93	-	2.94	2.93	2.93	-	2.94	2.93	2.93	-				
	Amps	6.3	6.3	6.3	-	7.2	7.2	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.2	-	10.4	10.4	10.4	-	11.8	11.8	11.7	-	11.8	11.8	11.7	-	11.8	11.8	11.7	-				
	Hi PR	248	249	251	-	286	288	289	-	327	328	330	-	370	371	373	-	417	418	420	-	467	468	470	-	467	468	470	-	467	468	470	-				
	Lo PR	126	128	131	-	134	135	138	-	140	142	145	-	146	147	151	-	151	153	156	-	158	160	163	-	158	160	163	-	158	160	163	-				
75	MBh	29.1	29.5	30.4	31.7	28.9	29.3	30.1	31.5	28.1	28.5	29.4	30.7	26.8	27.2	28.1	29.4	25.2	25.6	26.5	27.8	23.7	24.1	25.0	26.3	25.2	25.6	26.5	27.8	24.1	24.5	25.4	26.7				
	S/T	0.76	0.68	0.54	0.39	0.77	0.69	0.55	0.40	1.00	0.72	0.57	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.52	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.59				
	ΔT	24	22	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16	24	22	19	15	24	22	19	15				
	KW	1.72	1.72	1.71	1.73	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.13	2.36	2.35	2.35	2.36	2.61	2.61	2.61	2.62	2.92	2.92	2.91	2.93	2.61	2.61	2.61	2.62	2.92	2.92	2.91	2.93				
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.0	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7				
1000	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.4	29.8	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7				
	S/T	0.82	0.75	0.60	0.46	0.83	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.59	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.59				
	ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15				
	KW	1.73	1.73	1.72	1.74	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.14	2.37	2.36	2.36	2.37	2.62	2.62	2.62	2.63	2.93	2.92	2.92	2.94	2.62	2.62	2.62	2.63	2.93	2.92	2.92	2.94				
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.2	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8				
1125	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.1	31.0	31.0	31.0	31.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.0	28.9	28.6	29.0	29.7	27.2	27.6	28.0	28.9	30.2	28.6	29.0	29.7	27.2				
	S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.81	0.67	0.52	1.00	0.83	0.69	0.54	1.00	0.86	0.72	0.57	1.00	1.00	0.77	0.62	1.00	0.86	0.72	0.57	1.00	1.00	0.77	0.62				
	ΔT	22	20	17	13	22	20	17	13	22	21	17	13	22	21	17	13	22	21	17	13	23	21	18	14	22	20	17	13	23	21	18	14				
	KW	1.74	1.74	1.73	1.75	1.93	1.93	1.92	1.94	2.14	2.14	2.14	2.15	2.37	2.37	2.37	2.38	2.63	2.63	2.63	2.64	2.93	2.93	2.93	2.94	2.63	2.63	2.63	2.64	2.93	2.93	2.93	2.94				
	Amps	6.3	6.3	6.3	6.3	7.2	7.1	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.1	9.2	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8				
	Hi PR	248	249	251	255	287	288	289	294	327	328	330	334	370	371	373	377	417	418	420	424	467	468	470	474	417	418	420	424	467	468	470	474				
	Lo PR	126	128	131	136	134	135	139	144	140	142	145	150	146	147	151	156	151	153	156	161	158	160	163	168	151	153	156	161	158	160	163	168				

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																																			
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75						
80	MBh	29.3	29.7	30.5	31.9	29.0	29.4	30.3	31.6	28.2	28.7	29.5	30.9	26.9	27.3	28.2	29.5	25.3	25.8	26.6	27.9	23.9	24.3	25.2	26.5												
	S/T	1.00	0.81	0.67	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.70	0.6	1.00	0.87	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.65												
	ΔT	28	27	23	19	28	27	23	19	29	27	23	20	28	27	23	19	28	26	23	19	29	27	24	20												
	KW	1.72	1.72	1.72	1.7	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.1	2.36	2.35	2.35	2.37	2.61	2.61	2.61	2.6	2.92	2.92	2.91	2.93												
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.1	8.0	8.0	8.1	9.1	9.1	9.1	9.1	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7												
	Hi PR	245	246	247	252	283	284	286	290	323	324	326	330	367	368	370	374	414	415	416	421	464	465	466	471												
	LO PR	123	125	128	133	131	132	135	140	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165												
	MBh	29.6	30.1	30.9	32.3	29.4	29.8	30.7	32.0	28.6	29.0	29.9	31.2	27.3	27.7	28.6	29.9	25.7	26.1	27.0	28.3	24.3	24.7	25.5	26.9												
	S/T	1.00	0.88	0.73	0.6	1.00	0.88	0.74	0.59	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72												
	ΔT	27	25	22	18	27	25	22	18	28	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19												
	KW	1.73	1.73	1.72	1.7	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.1	2.37	2.36	2.36	2.38	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.94												
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.2	9.2	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8												
	Hi PR	247	248	249	254	285	286	288	292	325	326	328	332	369	370	372	376	416	417	418	423	466	467	468	473												
	LO PR	125	126	130	135	132	134	137	142	139	140	144	149	164	146	149	154	150	151	155	160	157	158	161	167												
		MBh	30.1	30.5	31.4	32.7	29.8	30.3	31.1	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.1	26.0	27.3											
S/T		1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.67	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75												
ΔT		26	25	21	17	26	24	21	17	27	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18												
KW		1.74	1.74	1.73	1.8	1.93	1.93	1.92	1.94	2.14	2.14	2.14	2.2	2.37	2.37	2.37	2.38	2.63	2.63	2.63	2.6	2.94	2.93	2.93	2.95												
Amps		6.3	6.3	6.3	6.3	7.2	7.2	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8												
	Hi PR	249	250	251	256	287	288	290	294	327	328	330	334	371	372	374	378	418	419	420	425	468	469	470	475												
	LO PR	127	128	132	137	134	136	139	144	141	142	146	151	146	148	151	156	152	153	157	162	159	160	163	169												

85	875	MBh	29.8	30.2	31.0	32.4	29.5	29.9	30.8	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.7	30.0	25.8	26.2	27.1	28.4	24.4	24.8	25.7	27.0
		S/T	1.00	0.92	0.78	0.63	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	1.00	0.76
		ΔT	32	30	27	23	32	30	27	23	2.13	2.13	2.12	2.14	2.36	2.36	2.36	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.92	2.93
		KW	1.72	1.72	1.72	1.73	1.91	1.91	1.91	1.92	8.1	8.1	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7
		Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.1	29.1	32.5	32.6	32.7	33.2	36.8	36.9	37.1	37.5	41.5	41.6	41.7	42.2	46.5	46.6	46.7
1000	MBh	30.1	30.5	31.4	32.7	29.9	30.3	31.2	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.8	25.2	26.0	27.4	
	S/T	1.00	0.98	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.82	
	ΔT	31	29	26	22	31	29	26	22	2.14	2.14	2.13	2.15	2.37	2.37	2.36	2.38	2.63	2.63	2.62	2.64	2.93	2.93	2.93	2.94	
	KW	1.73	1.73	1.73	1.74	1.92	1.92	1.92	1.93	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.3	10.4	11.7	11.7	11.7	11.8	
	Amps	6.3	6.3	6.2	6.3	7.1	7.1	7.1	7.2	29.3	32.7	32.8	32.9	33.4	37.0	37.1	37.3	37.7	41.7	41.8	42.0	42.4	46.7	46.8	47.0	47.4
1125	MBh	30.6	31.0	31.9	33.2	30.3	30.7	31.6	32.9	29.6	30.0	30.9	32.2	28.3	28.7	29.5	30.9	26.7	27.1	28.0	29.3	25.2	25.6	26.5	27.8	
	S/T	1.00	1.00	0.87	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.80	0.80	1.00	1.00	1.00	0.86	
	ΔT	30	28	25	21	30	28	25	21	2.15	2.15	2.14	2.16	2.38	2.38	2.37	2.39	2.64	2.63	2.63	2.65	2.94	2.94	2.93	2.95	
	KW	1.74	1.74	1.74	1.75	1.93	1.93	1.93	1.94	8.2	8.2	8.1	8.1	9.2	9.2	9.2	9.3	10.4	10.4	10.4	10.4	11.8	11.8	11.8	11.8	
	Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.2	7.2	29.5	32.9	33.0	33.1	33.6	37.2	37.3	37.5	37.9	41.9	42.0	42.2	42.6	46.9	47.0	47.2	47.6
85	1000	MBh	129	130	133	139	136	138	141	146	143	144	147	153	148	150	153	158	154	155	158	164	161	162	165	170
		S/T	1.00	0.98	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.82
		ΔT	31	29	26	22	31	29	26	22	2.14	2.14	2.13	2.15	2.37	2.37	2.36	2.38	2.63	2.63	2.62	2.64	2.93	2.93	2.93	2.94
		KW	1.73	1.73	1.73	1.74	1.92	1.92	1.92	1.93	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.3	10.4	11.7	11.7	11.7	11.8
		Amps	6.3	6.3	6.2	6.3	7.1	7.1	7.1	7.2	29.3	32.7	32.8	32.9	33.4	37.0	37.1	37.3	37.7	41.7	41.8	42.0	42.4	46.7	46.8	47.0
1125	MBh	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	168	
	S/T	1.00	1.00	0.87	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.80	0.80	1.00	1.00	1.00	0.86	
	ΔT	30	28	25	21	30	28	25	21	2.15	2.15	2.14	2.16	2.38	2.38	2.37	2.39	2.64	2.63	2.63	2.65	2.94	2.94	2.93	2.95	
	KW	1.74	1.74	1.74	1.75	1.93	1.93	1.93	1.94	8.2	8.2	8.1	8.1	9.2	9.2	9.2	9.3	10.4	10.4	10.4	10.4	11.8	11.8	11.8	11.8	
	Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.2	7.2	29.5	32.9	33.0	33.1	33.6	37.2	37.3	37.5	37.9	41.9	42.0	42.2	42.6	46.9	47.0	47.2	47.6
85	1000	MBh	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	168
		S/T	1.00	1.00	0.87	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.80	0.80	1.00	1.00	1.00	0.86
		ΔT	30	28	25	21	30	28	25	21	2.15	2.15	2.14	2.16	2.38	2.38	2.37	2.39	2.64	2.63	2.63	2.65	2.94	2.94	2.93	2.95
		KW	1.74	1.74	1.74	1.75	1.93	1.93	1.93	1.94	8.2	8.2	8.1	8.1	9.2	9.2	9.2	9.3	10.4	10.4	10.4	10.4	11.8	11.8	11.8	11.8
		Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.2	7.2	29.5	32.9	33.0	33.1	33.6	37.2	37.3	37.5	37.9	41.9	42.0	42.2	42.6	46.9	47.0	47.2
1125	MBh	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	168	
	S/T	1.00	1.00	0.87	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.80	0.80	1.00	1.00	1.00	0.86	
	ΔT	30	28	25	21	30	28	25	21	2.15	2.15	2.14	2.16	2.38	2.38	2.37	2.39	2.64	2.63	2.63	2.65	2.94	2.94	2.93	2.95	
	KW	1.74	1.74	1.74	1.75	1.93	1.93	1.93	1.94	8.2	8.2	8.1	8.1	9.2	9.2	9.2	9.3	10.4	10.4	10.4	10.4	11.8	11.8	11.8	11.8	
	Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.2	7.2	29.5	32.9	33.0	33.1	33.6	37.2	37.3	37.5	37.9	41.9	42.0	42.2	42.6	46.9	47.0	47.2	47.6

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																							
		75								85								95								105								115							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
70	1050	MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.0	32.5	33.5	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-	28.4	28.8	29.9	-											
		S/T	0.59	0.52	0.38	-	0.60	0.52	0.39	-	0.62	0.55	0.42	-	0.64	0.57	0.43	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-											
		ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-											
		KW	2.09	2.09	2.09	-	2.32	2.32	2.32	-	2.58	2.58	2.58	-	2.87	2.86	2.86	-	3.18	3.18	3.17	-	3.55	3.55	3.54	-	3.55	3.55	3.54	-											
		Amps	7.6	7.6	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	14.2	14.2	14.2	-											
	HI PR	254	255	257	-	294	295	297	-	336	337	339	-	381	382	384	-	430	431	433	-	482	483	485	-	482	483	485	-												
	LO PR	121	123	126	-	129	130	133	-	135	137	140	-	141	142	145	-	146	147	151	-	153	154	157	-	153	154	157	-												
70	1200	MBh	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	28.8	29.3	30.3	-											
		S/T	0.65	0.58	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-											
		ΔT	18	16	13	-	18	16	13	-	18	17	13	-	18	16	13	-	18	16	13	-	19	17	14	-	19	17	14	-											
		KW	2.10	2.10	2.10	-	2.34	2.33	2.33	-	2.60	2.59	2.59	-	2.88	2.88	2.87	-	3.19	3.19	3.19	-	3.56	3.56	3.55	-	3.56	3.56	3.55	-											
		Amps	7.6	7.6	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-											
	HI PR	256	257	259	-	296	297	299	-	338	339	341	-	384	385	386	-	432	433	435	-	484	485	487	-	484	485	487	-												
	LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-												
1350	1350	MBh	35.8	36.3	37.3	-	35.5	36.0	37.0	-	34.6	35.1	36.1	-	33.0	33.5	34.5	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-	29.4	29.9	30.9	-											
		S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-											
		ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-											
		KW	2.11	2.11	2.11	-	2.35	2.34	2.34	-	2.61	2.60	2.60	-	2.89	2.89	2.88	-	3.20	3.20	3.20	-	3.57	3.57	3.56	-	3.57	3.57	3.56	-											
		Amps	7.7	7.7	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.2	-	12.7	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-											
	HI PR	258	259	261	-	298	300	301	-	340	342	343	-	386	387	389	-	434	435	437	-	486	488	489	-	486	488	489	-												
	LO PR	125	127	130	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-												

75	1050	MBh	34.8	35.3	36.3	37.9	34.5	35.0	36.0	37.6	33.6	34.1	35.1	36.7	32.0	32.5	33.6	35.2	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5	
		S/T	0.72	0.64	0.51	0.37	0.72	0.65	0.52	0.38	1.00	0.67	0.54	0.40	1.00	0.69	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.76	0.63	0.49	
		ΔT	23	21	18	15	23	21	18	15	23	22	18	15	23	21	21	18	15	23	21	18	14	24	22	19	15
		KW	2.09	2.09	2.08	2.10	2.32	2.32	2.32	2.33	2.58	2.58	2.58	2.59	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.19	3.55	3.54	3.54	3.56	
		Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	8.7	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.2	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.3	
	HI PR	254	255	257	262	294	295	297	302	336	337	339	344	382	383	384	389	430	431	433	438	482	484	485	490		
	LO PR	121	123	126	131	129	130	133	138	135	137	140	145	141	142	145	150	146	147	151	156	153	154	157	162		
	1200	MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.5	35.6	37.2	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0	
		S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	
		ΔT	22	20	17	14	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	13	23	21	18	14	
KW		2.10	2.10	2.10	2.11	2.33	2.33	2.33	2.35	2.59	2.59	2.59	2.61	2.88	2.87	2.87	2.89	3.19	3.19	3.18	3.20	3.56	3.56	3.55	3.57		
Amps		7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0		
1350	HI PR	256	258	259	264	297	298	299	304	339	340	341	346	384	385	387	391	433	434	435	440	485	486	487	492		
	LO PR	123	125	128	133	130	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164		
	MBh	35.8	36.3	37.4	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.0	33.5	34.6	36.2	31.1	31.6	32.7	34.2	29.4	29.9	30.9	32.5		
	S/T	0.81	0.73	0.60	0.46	0.82	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.78	0.65	0.51	1.00	0.81	0.67	0.53	1.00	1.00	0.72	0.58		
	ΔT	21	19	16	13	21	19	16	13	21	20	16	13	21	19	16	13	21	19	16	12	22	20	17	13		
1350	KW	2.11	2.11	2.11	2.12	2.34	2.34	2.34	2.36	2.60	2.60	2.60	2.62	2.89	2.88	2.88	2.90	3.20	3.20	3.19	3.21	3.57	3.57	3.56	3.58		
	Amps	7.7	7.7	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0		
	HI PR	259	260	261	266	299	300	302	306	341	342	344	348	386	387	389	393	435	436	438	442	487	488	490	494		
	LO PR	125	127	130	135	132	134	137	142	139	140	143	149	144	146	149	154	150	151	154	159	156	158	161	166		

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80		MBh	35.0	35.5	36.5	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.2	32.7	33.7	35.3	30.3	30.8	31.8	33.4	28.6	29.0	30.1	31.7	28.6	29.0	30.1	31.7	28.6	29.0	30.1	31.7			
		S/T	0.84	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61			
	1050	ΔT	27	25	22	19	27	25	22	18	27	25	22	19	27	25	22	18	27	25	22	18	28	26	23	19	28	26	23	19	28	26	23	19			
		KW	2.09	2.09	2.09	2.1	2.32	2.32	2.32	2.34	2.58	2.58	2.58	2.6	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.2	3.55	3.55	3.54	3.56	3.18	3.18	3.17	3.2	3.55	3.55	3.54	3.56			
		Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.0	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.0			
	HI PR	255	256	258	262	295	296	298	302	337	338	340	344	382	383	385	389	431	432	434	438	483	484	486	490	483	484	486	490	483	484	486	490				
	LO PR	122	123	126	132	129	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	155	158	163	146	148	151	156	153	155	158	163				
80		MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1			
		S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67			
		ΔT	26	24	21	17	26	24	21	17	26	24	21	18	26	24	21	17	26	24	21	17	27	25	22	18	27	25	22	18	27	25	22	18			
	1200	KW	2.10	2.10	2.10	2.1	2.34	2.33	2.33	2.35	2.60	2.59	2.59	2.6	2.88	2.87	2.87	2.89	3.19	3.19	3.19	3.2	3.56	3.56	3.55	3.57	3.19	3.19	3.19	3.2	3.56	3.56	3.55	3.57			
		Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0			
	HI PR	257	258	260	264	297	298	300	304	339	340	342	346	384	385	387	392	433	434	436	440	485	486	488	492	433	434	436	440	485	486	488	492				
	LO PR	124	125	128	133	131	132	136	141	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165	148	150	153	158	155	156	160	165				
1350		MBh	36.0	36.5	37.5	39.1	35.7	36.2	37.2	38.8	34.8	35.3	36.3	37.9	33.2	33.7	34.7	36.3	31.3	31.8	32.8	34.4	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7			
		S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71			
		ΔT	25	23	20	17	25	23	20	17	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17	26	24	21	17	26	24	21	17			
	1350	KW	2.11	2.11	2.11	2.1	2.35	2.34	2.34	2.36	2.61	2.60	2.60	2.6	2.89	2.89	2.88	2.90	3.20	3.20	3.20	3.2	3.57	3.57	3.56	4.00	3.20	3.20	3.20	3.2	3.57	3.57	3.56	4.00			
		Amps	7.7	7.7	7.6	8.0	9.0	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.7	12.6	12.6	13.0	14.3	14.3	14.3	14.0	12.7	12.6	12.6	13.0	14.3	14.3	14.3	14.0			
	HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	394	435	436	438	442	487	488	490	494	487	488	490	494	487	488	490	494				
	LO PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	157	158	162	167	157	158	162	167				

IDB		OUTDOOR AMBIENT TEMPERATURE																									
		65				75				85				95				105				115					
		ENTERING INDOOR WET BULB TEMPERATURE																									
AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1100	MBh	35.0	35.5	36.6	-	34.7	35.2	36.3	-	33.8	34.3	35.4	-	32.3	32.8	33.8	-	30.4	30.9	31.9	-	28.6	29.1	30.2	-	
		S/T	0.66	0.59	0.45	-	0.67	0.59	0.46	-	0.70	0.62	0.48	-	0.71	0.64	0.50	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	19	17	14	-	20	19	15	-	
		KW	2.03	2.03	2.02	-	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.81	2.81	2.81	-	3.13	3.13	3.13	-	3.51	3.50	3.50	-	
		Amps	7.4	7.4	7.4	-	8.5	8.5	8.5	-	9.7	9.7	9.7	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	
		HI PR	255	256	258	-	295	296	298	-	337	338	340	-	382	383	385	-	430	431	433	-	482	483	485	-	
70	1200	LO PR	122	123	126	-	129	130	134	-	135	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-	
		MBh	35.4	35.9	37.0	-	35.1	35.6	36.6	-	34.2	34.7	35.7	-	32.7	33.2	34.2	-	30.8	31.3	32.3	-	29.0	29.5	30.6	-	
		S/T	0.69	0.62	0.48	-	0.70	0.62	0.49	-	0.72	0.65	0.51	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	
		KW	2.04	2.03	2.03	-	2.27	2.27	2.27	-	2.54	2.53	2.53	-	2.82	2.82	2.82	-	3.14	3.14	3.13	-	3.51	3.51	3.51	-	
		Amps	7.5	7.5	7.5	-	8.6	8.6	8.5	-	9.8	9.8	9.7	-	11.1	11.1	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	
70	1350	HI PR	257	258	259	-	296	298	299	-	338	339	341	-	383	384	386	-	432	433	435	-	484	485	486	-	
		LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	147	149	152	-	154	156	159	-	
		MBh	36.1	36.6	37.6	-	35.8	36.3	37.3	-	34.9	35.4	36.4	-	33.4	33.8	34.9	-	31.5	31.9	33.0	-	29.7	30.2	31.2	-	
		S/T	0.71	0.63	0.50	-	0.71	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	
		ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	
		KW	2.05	2.04	2.04	-	2.28	2.28	2.28	-	2.55	2.54	2.54	-	2.83	2.83	2.83	-	3.15	3.15	3.14	-	3.52	3.52	3.52	-	
75	1100	Amps	7.5	7.5	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	
		HI PR	259	260	262	-	299	300	302	-	341	342	343	-	386	387	388	-	434	435	437	-	486	487	489	-	
		LO PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	151	154	-	156	158	161	-	
		MBh	35.1	35.6	36.6	38.2	34.8	35.2	36.3	37.9	33.9	34.3	35.4	37.0	32.3	32.8	33.8	35.4	30.4	30.9	31.9	33.5	28.7	29.2	30.2	31.8	
		S/T	0.79	0.72	0.58	0.44	0.80	0.72	0.59	0.45	1.00	0.75	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.84	0.71	0.56	
		ΔT	24	22	18	15	24	22	18	15	24	22	18	15	24	22	18	15	23	22	18	14	25	23	19	15	
75	1200	KW	2.03	2.02	2.02	2.04	2.26	2.26	2.26	2.28	2.53	2.52	2.52	2.54	2.81	2.81	2.81	2.82	3.13	3.13	3.12	3.14	3.50	3.50	3.50	3.52	
		Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.1	11.1	12.5	12.5	12.5	12.5	14.2	14.2	14.3	14.3	
		HI PR	255	256	258	263	295	296	298	302	337	338	340	344	382	383	385	389	430	432	433	438	482	483	485	490	
		LO PR	122	123	126	131	129	130	134	139	135	137	140	145	141	142	145	150	146	148	151	156	153	154	157	162	
		MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.2	34.2	34.7	35.8	37.3	32.7	33.2	34.2	35.8	30.8	31.3	32.3	33.9	29.1	29.5	30.6	32.2	
		S/T	0.82	0.74	0.61	0.47	0.83	0.75	0.61	0.47	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	0.82	0.68	0.54	1.00	1.00	0.73	0.59	
75	1350	ΔT	23	21	18	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	24	22	18	15	
		KW	2.03	2.03	2.03	2.05	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.55	2.82	2.82	2.81	2.83	3.14	3.14	3.13	3.15	3.51	3.51	3.52	3.52	
		Amps	7.5	7.5	7.4	7.5	8.6	8.5	8.5	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.3	14.3	
		HI PR	257	258	260	264	297	298	300	304	338	340	341	346	383	385	386	391	432	433	435	439	484	485	487	491	
		LO PR	123	125	128	133	130	132	135	140	137	138	141	146	142	144	147	152	147	149	152	157	154	156	159	164	
		MBh	36.1	36.6	37.7	39.2	35.8	36.3	37.4	38.9	34.9	35.4	36.4	38.0	33.4	33.9	34.9	36.5	31.5	32.0	33.0	34.6	29.7	30.2	31.3	32.8	
75	1350	S/T	0.84	0.76	0.63	0.48	0.84	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	0.81	0.68	0.53	1.00	0.83	0.70	0.56	1.00	1.00	0.75	0.61	
		ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14	
		KW	2.04	2.04	2.04	2.06	2.28	2.28	2.27	2.29	2.54	2.54	2.54	2.56	2.83	2.83	2.82	2.84	3.15	3.15	3.14	3.16	3.52	3.52	3.52	3.53	
		Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.5	12.6	14.3	14.3	14.3	14.3	
		HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	393	434	435	437	442	486	487	489	493	
		LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	154	159	156	158	161	166	
IDB: Entering Indoor Dry Bulb Temperature High and low pressures are measured at the liquid and suction service valves.																								kW = Total system power Amps = outdoor unit amps (comp.+fan)			
Shaded area reflects ACCA (TVA) conditions																											

		OUTDOOR AMBIENT TEMPERATURE																																																																																																																																																																																																																																																																																																																																																															
		65						75						85						95						105						115																																																																																																																																																																																																																																																																																																																																	
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																																																																																																																																																																																																																																																																																																																
80	1100	MBh	35.2	35.7	36.8	38.3	34.9	35.4	36.5	38.0	34.0	34.5	35.6	37.1	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	31.9	1.00	0.92	0.84	0.71	0.6	1.00	0.87	0.74	0.6	1.00	0.78	0.6	1.00	0.83	0.69																																																																																																																																																																																																																																																																																																																								
		S/T	0.92	0.84	0.71	0.6	1.00	0.85	0.71	0.57	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.61	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.83	0.69																																																																																																																																																																																																																																																																																																																								
		ΔT	28	26	23	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20	28	26	23	19	28	26	22	18	29	27	23	20	28	26	23	19																																																																																																																																																																																																																																																																																																																							
		KW	2.03	2.03	2.02	2.0	2.26	2.26	2.26	2.28	2.53	2.53	2.52	2.5	2.81	2.81	2.81	2.83	3.13	3.13	3.13	3.13	3.51	3.50	3.50	3.52	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5																																																																																																																																																																																																																																																																																																																					
		Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.5	14.2	14.2	14.2	14.3	431	431	431	431	431	432	434	438	483	484	486	490	483	484	486	490	483	484	486	490																																																																																																																																																																																																																																																																																																																			
	Hi PR	256	257	259	263	296	297	298	303	337	339	340	345	382	384	385	390	431	432	434	438	483	484	486	490	147	148	151	156	153	155	158	163	157	159	162	167	157	159	162	167	157	159	162	167																																																																																																																																																																																																																																																																																																																				
	LO PR	122	124	127	132	130	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163	157	159	162	167	157	159	162	167	157	159	162	167	157	159	162	167	157	159	162	167																																																																																																																																																																																																																																																																																																																				
80	1200	MBh	35.6	36.1	37.2	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.9	33.4	34.4	36.0	31.0	31.5	32.5	34.1	29.2	29.7	30.8	32.3	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.81	0.7	1.00	0.86	0.72																																																																																																																																																																																																																																																																																																																									
		S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.64	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.86	0.72																																																																																																																																																																																																																																																																																																																				
		ΔT	27	25	22	18	27	25	22	18	27	26	22	18	27	25	22	18	27	25	22	18	28	26	23	19	27	25	22	18	27	25	21	18	28	26	23	19	27	25	22	18	28	26	23	19																																																																																																																																																																																																																																																																																																																			
		KW	2.04	2.03	2.03	2.1	2.27	2.27	2.27	2.28	2.54	2.53	2.53	2.6	2.82	2.82	2.81	2.83	3.14	3.14	3.14	3.13	3.51	3.51	3.51	3.53	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5																																																																																																																																																																																																																																																																																																																
		Amps	7.5	7.5	7.5	7.5	8.6	8.6	8.5	8.6	9.8	9.8	9.8	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.5	14.2	14.2	14.2	14.3	432	432	432	432	432	434	435	440	484	485	487	492	484	485	487	492	484	485	487	492																																																																																																																																																																																																																																																																																																																		
	Hi PR	257	258	260	265	297	298	300	304	339	340	342	346	384	385	387	391	432	434	435	440	484	485	487	492	148	150	153	158	155	156	159	164	157	159	162	167	157	159	162	167	157	159	162	167																																																																																																																																																																																																																																																																																																																				
	LO PR	124	125	128	133	131	132	135	141	137	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	157	159	162	167	157	159	162	167	157	159	162	167	157	159	162	167	157	159	162	167																																																																																																																																																																																																																																																																																																																				
1350	1350	MBh	36.3	36.8	37.8	39.4	36.0	36.5	37.5	39.1	35.1	35.6	36.6	38.2	33.6	34.0	35.1	36.7	31.7	32.1	33.2	34.8	29.9	30.4	31.4	33.0	1.00	0.89	0.75	0.6	1.00	0.92	0.78	0.6	1.00	0.82	0.7	1.00	0.88	0.73																																																																																																																																																																																																																																																																																																																									
		S/T	1.00	0.89	0.75	0.6	1.00	0.89	0.76	0.61	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.66	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.87	0.74	0.6	1.00	0.88	0.73																																																																																																																																																																																																																																																																																																																				
		ΔT	26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	20	17	27	25	22	18	26	24	21	17	26	24	20	17	27	25	22	18	27	25	22	18	27	25	22	18																																																																																																																																																																																																																																																																																																																			
		KW	2.05	2.04	2.04	2.1	2.28	2.28	2.28	2.29	2.55	2.54	2.54	2.6	2.83	2.83	2.83	2.84	3.15	3.15	3.15	3.14	3.52	3.52	3.52	3.54	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6	12.6

85	1100	MBh	35.8	36.3	37.3	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.1	33.5	34.6	36.2	31.2	31.7	32.7	34.3	29.4	29.9	30.9	32.5
		S/T	1.00	0.94	0.81	0.67	1.00	0.95	0.81	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.79
		ΔT	32	30	26	23	32	30	26	23	32	30	26	23	32	30	26	22	31	30	26	22	33	31	27	23
		KW	2.03	2.03	2.03	2.04	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.54	2.82	2.82	2.81	2.83	3.14	3.13	3.13	3.15	3.51	3.51	3.50	3.52
		Amps	7.5	7.5	7.4	7.5	8.5	8.5	8.5	8.6	9.8	9.7	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3
1200	HI PR	257	258	260	264	297	298	300	304	339	340	341	346	384	385	386	391	432	433	435	439	484	485	487	491	
	LO PR	124	126	129	134	131	133	136	141	138	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	
	MBh	36.2	36.7	37.7	39.3	35.9	36.4	37.4	39.0	35.0	35.5	36.5	38.1	33.4	33.9	35.0	36.5	31.5	32.0	33.1	34.6	29.8	30.3	31.3	32.9	
	S/T	1.00	0.97	0.83	0.69	1.00	0.98	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	1.00	0.82	
	ΔT	31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	31	29	25	22	32	30	26	23	
1350	KW	2.04	2.04	2.03	2.05	2.28	2.27	2.27	2.29	2.54	2.54	2.53	2.55	2.83	2.82	2.82	2.84	3.14	3.14	3.14	3.16	3.52	3.52	3.51	3.53	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.6	9.8	9.8	9.8	9.8	11.1	11.1	11.1	11.2	12.6	12.5	12.5	12.6	14.3	14.3	14.2	14.3	
	HI PR	258	260	261	266	298	299	301	306	340	341	343	347	385	386	388	392	434	435	437	441	485	487	488	493	
	LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	154	159	156	158	161	166	
	MBh	36.9	37.4	38.4	40.0	36.6	37.1	38.1	39.7	35.7	36.2	37.2	38.8	34.1	34.6	35.7	37.2	32.2	32.7	33.8	35.3	30.5	31.0	32.0	33.6	
1350	S/T	1.00	0.99	0.85	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.92	0.78	1.00	1.00	1.00	0.83	
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	25	22	
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4	
	HI PR	261	262	264	268	301	302	304	308	342	344	345	350	387	389	390	395	436	437	439	443	488	489	491	495	
1350	LO PR	128	129	132	137	135	137	140	145	141	143	146	151	147	148	151	157	152	154	157	162	159	160	163	168	

			OUTDOOR AMBIENT TEMPERATURE																													
			65					75					85					95					105					115				
IDB	AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-		
		S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-		
		ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-		
		KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-		
		Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-		
70	1400	HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	502	503	505	-		
		LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-		
		MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-		
		S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-		
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-		
70	1400	KW	2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-		
		Amps	8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-		
		HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-	504	505	507	-		
		LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-	161	162	165	-		
		MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-		
70	1575	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-		
		ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-		
		KW	2.35	2.34	2.34	-	2.62	2.61	2.61	-	2.92	2.91	2.91	-	3.24	3.24	3.23	-	3.60	3.60	3.60	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-		
		Amps	8.4	8.4	8.4	-	9.6	9.6	9.6	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.1	14.1	-	16.1	16.1	16.1	-	16.1	16.1	16.1	-		
		HI PR	269	270	272	-	311	312	314	-	354	355	357	-	401	402	404	-	452	453	455	-	506	507	509	-	506	507	509	-		
70	1575	LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	160	-	163	164	167	-	163	164	167	-		
		MBh	39.7	40.3	41.4	43.3	39.3	39.9	41.1	42.9	38.3	38.9	40.1	41.9	36.5	37.1	38.3	40.1	34.3	34.9	36.1	37.9	32.4	32.9	34.1	35.9	32.4	32.9	34.1	35.9		
		S/T	0.77	0.69	0.55	0.40	1.00	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53		
		ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	22	18	15	25	23	19	25	23	19	16		
		KW	2.32	2.32	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.90	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.59	4.00	4.00	4.00	3.99	4.00	4.00	3.99	4.01		
75	1225	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	9.6	10.9	10.9	11.0	12.4	12.4	12.3	12.3	14.0	14.0	14.0	14.0	16.0	16.0	15.9	16.0	16.0	16.0	15.9	16.0	16.0		
		HI PR	265	266	268	272	306	307	309	314	350	351	353	358	397	398	400	405	448	449	451	455	502	503	505	510	502	503	505	510		
		LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	164	169	159	160	164	169		
		MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4		
		S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	1.00	0.68	0.53	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59		
75	1400	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	24	22	18	15		
		KW	2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	3.22	3.22	3.24	3.59	3.59	3.58	3.60	4.01	4.01	4.01	4.03	4.01	4.01	4.01	4.03		
		Amps	8.3	8.3	8.3	8.0	9.6	9.6	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.1		
		HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	400	402	407	450	451	453	458	504	505	507	512	504	505	507	512		
		LO PR	128	130	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	158	164	161	162	165	171	161	162	165	171		
75	1400	MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	38.2	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1		
		S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62		
		ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	21	20	16	13	23	21	17	14	23	21	17	14		
		KW	2.35	2.34	2.34	2.36	2.61	2.61	2.61	2.63	2.91	2.91	2.91	2.93	3.24	3.24	3.23	3.25	3.60	3.60	3.59	3.61	4.03	4.02	4.02	4.04	4.03	4.02	4.02	4.04		
		Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.1	16.2	16.1	16.1	16.1	16.2		
75	1575	HI PR	269	270	272	277	311	312	314	318	354	356	357	362	402	403	405	409	452	453	455	460	506	508	509	514	506	508	509	514		
		LO PR	130	132	135	140	138	139	142	148	144	146	149	155	150	152	155	160	156	157	160	166	163	164	167	163	164	167	173			

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	39.9	40.5	41.7	43.5	39.6	40.1	41.3	43.1	38.5	39.1	40.3	42.1	36.7	37.3	38.5	40.3	34.6	35.1	36.3	38.1	32.6	33.1	34.3	36.1
	S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.66
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	29	27	23	20
	KW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.9	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.02
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.0	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0
	HI PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	448	449	451	456	502	504	505	510
	LO PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169
	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6
	S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.60	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.72
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19
1575	KW	2.33	2.33	2.33	2.4	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.9	3.23	3.23	3.23	3.24	3.59	3.59	3.58	3.6	4.02	4.01	4.01	4.03
	Amps	8.4	8.3	8.3	8.0	9.6	9.6	9.6	10.0	11.0	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1
	HI PR	267	268	270	275	309	310	312	317	353	354	356	360	400	401	403	407	451	452	454	458	505	506	508	512
	LO PR	129	130	133	139	136	138	141	146	143	144	148	153	149	150	153	159	154	156	159	164	161	163	166	171
	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.4	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.3	37.4	39.3	33.7	34.3	35.5	37.3
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.75
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18
	KW	2.35	2.34	2.34	2.4	2.62	2.61	2.61	2.63	2.92	2.91	2.91	2.9	3.24	3.24	3.23	3.25	3.60	3.60	3.60	3.6	4.03	4.03	4.02	4.00
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.1	14.1	14.0	16.1	16.1	16.1	16.2
	HI PR	270	271	273	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	460	507	508	510	514
	LO PR	131	132	135	141	138	140	143	148	145	147	150	155	151	152	155	161	156	158	161	166	163	165	168	173

85	MBh	40.6	41.1	42.3	44.1	40.2	40.8	42.0	43.8	39.2	39.7	40.9	42.7	37.4	38.0	39.1	41.0	35.2	35.8	37.0	38.8	33.2	33.8	35.0	36.8
	S/T	1.00	0.92	0.78	0.63	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	1.00	0.71	1.00	1.00	1.00	0.76
	ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24
	KW	2.33	2.32	2.32	2.34	2.59	2.59	2.59	2.61	2.89	2.89	2.89	2.91	3.22	3.22	3.21	3.23	3.58	3.58	3.58	3.60	4.01	4.01	4.00	4.02
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.0	14.0	14.0	16.0	16.0	16.0	16.1
	HI PR	266	267	269	274	308	309	311	316	352	353	355	359	399	400	402	406	450	451	453	457	504	505	507	511
	LO PR	129	130	133	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171
	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3
	S/T	1.00	0.99	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.82
	ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22
1575	KW	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.59	3.59	3.61	4.02	4.02	4.01	4.04
	Amps	8.4	8.4	8.3	8.0	9.6	9.6	9.6	10.0	11.0	11.0	10.9	11.0	12.5	12.5	12.4	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.0	16.1
	HI PR	269	270	272	276	310	311	313	318	354	355	357	362	401	402	404	409	452	453	455	459	506	507	509	514
	LO PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173
	MBh	41.7	42.3	43.5	45.3	41.4	41.9	43.1	44.9	40.3	40.9	42.1	43.9	38.5	39.1	40.3	42.1	36.4	36.9	38.1	39.9	34.4	34.9	36.1	37.9
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.86
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21
	KW	2.35	2.35	2.34	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.24	3.24	3.24	3.26	3.61	3.61	3.60	3.62	4.03	4.03	4.03	4.05
	Amps	8.4	8.4	8.4	8.0	9.7	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.1	14.0	16.1	16.1	16.1	16.2
	HI PR	271	272	274	278	312	314	315	320	356	357	359	364	403	404	406	411	454	455	457	462	508	509	511	516
	LO PR	132	134	137	143	140	142	145	150	147	148	152	157	153	154	157	163	158	160	163	168	165	167	170	175

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	1400	MBh	46.4	47.1	48.5	-	46.0	46.7	48.0	-	44.8	45.4	46.8	-	42.7	43.4	44.8	-	40.2	40.8	42.2	-	37.9	38.5	39.9	-	37.9	38.5	39.9	-	37.9	38.5	39.9	-			
		S/T	0.61	0.54	0.41	-	0.62	0.55	0.41	-	0.65	0.57	0.44	-	0.66	0.59	0.46	-	1.00	0.61	0.48	-	1.00	0.66	0.53	-	1.00	0.66	0.53	-	1.00	0.66	0.53	-			
		ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-			
		KW	2.77	2.77	2.76	-	3.09	3.08	3.08	-	3.44	3.44	3.43	-	3.83	3.82	3.82	-	4.26	4.25	4.25	-	4.76	4.76	4.75	-	4.76	4.76	4.75	-	4.76	4.76	4.75	-			
		Amps	10.1	10.1	10.0	-	11.5	11.5	11.5	-	13.2	13.2	13.1	-	14.9	14.9	14.9	-	16.9	16.9	16.9	-	19.2	19.2	19.2	-	19.2	19.2	19.2	-	19.2	19.2	19.2	-			
	HI PR	257	259	260	-	298	299	301	-	341	342	343	-	386	387	389	-	436	437	438	-	488	489	491	-	488	489	491	-	488	489	491	-				
	LO PR	123	125	128	-	131	132	136	-	137	139	142	-	143	145	148	-	148	150	153	-	155	157	160	-	155	157	160	-	155	157	160	-				
70	1550	MBh	46.9	47.6	48.9	-	46.5	47.1	48.5	-	45.3	45.9	47.3	-	43.2	43.9	45.2	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-			
		S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-			
		ΔT	18	17	13	-	18	17	13	-	19	17	13	-	18	17	13	-	18	16	13	-	19	17	14	-	19	17	14	-	19	17	14	-			
		KW	2.78	2.78	2.77	-	3.10	3.10	3.09	-	3.45	3.45	3.45	-	3.84	3.84	3.83	-	4.27	4.27	4.26	-	4.77	4.77	4.76	-	4.77	4.77	4.76	-	4.77	4.77	4.76	-			
		Amps	10.1	10.1	10.1	-	11.6	11.6	11.6	-	13.2	13.2	13.2	-	15.0	15.0	14.9	-	16.9	16.9	16.9	-	19.3	19.2	19.2	-	19.3	19.2	19.2	-	19.3	19.2	19.2	-			
	HI PR	259	260	262	-	300	301	303	-	342	343	345	-	388	389	391	-	437	438	440	-	490	491	493	-	490	491	493	-	490	491	493	-				
	LO PR	125	126	129	-	132	134	137	-	139	140	144	-	144	146	149	-	150	151	154	-	157	158	161	-	157	158	161	-	157	158	161	-				
1800	1800	MBh	47.9	48.5	49.9	-	47.5	48.1	49.5	-	46.2	46.9	48.3	-	44.2	44.8	46.2	-	41.6	42.3	43.7	-	39.3	40.0	41.3	-	39.3	40.0	41.3	-	39.3	40.0	41.3	-			
		S/T	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-			
		ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-	18	16	13	-			
		KW	2.80	2.80	2.79	-	3.12	3.11	3.11	-	3.47	3.47	3.46	-	3.86	3.85	3.85	-	4.29	4.28	4.28	-	4.79	4.79	4.78	-	4.79	4.79	4.78	-	4.79	4.79	4.78	-			
		Amps	10.2	10.2	10.2	-	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.1	15.0	15.0	-	17.0	17.0	17.0	-	19.3	19.3	19.3	-	19.3	19.3	19.3	-	19.3	19.3	19.3	-			
	HI PR	262	263	265	-	302	304	305	-	345	346	348	-	391	392	394	-	440	441	443	-	493	494	496	-	493	494	496	-	493	494	496	-				
	LO PR	127	129	132	-	135	136	140	-	141	143	146	-	147	149	152	-	152	154	157	-	159	161	164	-	159	161	164	-	159	161	164	-				

75	1400	MBh	46.4	47.1	48.5	50.6	46.0	46.7	48.1	50.2	44.8	45.5	46.9	49.0	42.7	43.4	44.8	46.9	40.2	40.9	42.2	44.4	37.9	38.5	39.9	42.0
		S/T	0.74	0.67	0.53	0.39	0.75	0.67	0.54	0.40	1.00	0.70	0.56	0.42	1.00	0.72	0.58	0.44	1.00	0.74	0.60	0.46	1.00	1.00	0.66	0.51
		ΔT	23	21	18	15	23	21	18	14	23	22	18	15	23	21	18	14	23	21	18	14	24	22	19	15
		KW	2.77	2.76	2.76	2.78	3.08	3.08	3.08	3.10	3.44	3.44	3.43	3.46	3.82	3.82	3.82	3.84	4.25	4.25	4.25	4.27	4.76	4.76	4.75	4.77
		Amps	10.1	10.1	10.0	10.1	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.8	17.0	19.2	19.2	19.1	19.3
	HI PR	258	259	261	265	298	299	301	306	341	342	344	348	386	388	389	394	436	437	439	443	488	490	491	496	
	LO PR	123	125	128	133	131	132	136	141	137	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	
	1550	MBh	46.9	47.6	49.0	51.1	46.5	47.2	48.5	50.7	45.3	46.0	47.3	49.5	43.2	43.9	45.3	47.4	40.7	41.3	42.7	44.8	38.4	39.0	40.4	42.5
		S/T	0.79	0.71	0.58	0.44	0.79	0.72	0.58	0.44	1.00	0.74	0.61	0.47	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.51	1.00	1.00	0.70	0.56
		ΔT	22	21	17	14	22	20	17	14	23	21	17	14	22	20	17	14	22	20	17	13	23	21	18	15
KW		2.78	2.78	2.77	2.80	3.10	3.09	3.09	3.11	3.45	3.45	3.44	3.47	3.84	3.83	3.83	3.85	4.27	4.26	4.26	4.28	4.77	4.77	4.76	4.79	
Amps		10.1	10.1	10.1	10.2	11.6	11.6	11.5	11.7	13.2	13.2	13.2	13.3	15.0	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3	
1800	HI PR	259	260	262	267	300	301	303	307	342	344	345	350	388	389	391	396	437	439	440	445	490	491	493	498	
	LO PR	125	126	129	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167	
	MBh	47.9	48.5	49.9	52.0	47.5	48.1	49.5	51.6	46.3	46.9	48.3	50.4	44.2	44.8	46.2	48.3	41.7	42.3	43.7	45.8	39.3	40.0	41.4	43.5	
	S/T	0.82	0.75	0.62	0.47	1.00	0.76	0.62	0.48	1.00	0.78	0.65	0.50	1.00	0.80	0.67	0.52	1.00	0.82	0.69	0.55	1.00	1.00	0.74	0.60	
	ΔT	21	19	16	13	21	19	16	12	21	20	16	13	21	19	16	12	21	19	16	12	22	20	17	13	
1800	KW	2.80	2.79	2.79	2.81	3.11	3.11	3.11	3.13	3.47	3.47	3.46	3.49	3.85	3.85	3.85	3.87	4.28	4.28	4.28	4.30	4.79	4.79	4.78	4.80	
	Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0	15.0	15.1	17.0	17.0	17.0	17.1	19.3	19.3	19.3	19.4	
	HI PR	262	263	265	270	303	304	306	310	345	346	348	353	391	392	394	398	440	441	443	448	493	494	496	500	
	LO PR	127	129	132	137	135	136	140	145	142	143	146	151	147	149	152	157	152	154	157	162	159	161	164	169	

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	1400	MBh	46.7	47.3	48.7	50.8	46.3	46.9	48.3	50.4	45.1	45.7	47.1	49.2	43.0	43.6	45.0	47.1	40.4	41.1	42.5	44.6	38.1	38.8	40.2	42.3	38.1	38.8	40.2	42.3	38.1	38.8	40.2	42.3			
		S/T	1.00	0.79	0.66	0.5	1.00	0.80	0.66	0.52	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.73	0.6	1.00	1.00	0.78	0.64			
		ΔT	27	25	22	19	27	25	22	18	27	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	28	26	23	19	28	26	23	19			
		KW	2.77	2.77	2.76	2.8	3.09	3.08	3.08	3.10	3.44	3.44	3.43	3.5	3.83	3.82	3.82	3.84	4.26	4.25	4.25	4.3	4.76	4.76	4.75	4.78	4.76	4.76	4.75	4.78	4.76	4.76	4.75	4.78			
		Amps	10.1	10.1	10.0	10.2	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3	19.2	19.2	19.2	19.3	19.2	19.2	19.2	19.3	19.3		
80	1550	HI PR	258	259	261	266	299	300	302	306	341	342	344	349	387	388	390	394	436	437	439	444	489	490	492	496	489	490	492	496	489	490	492	496			
		LO PR	124	125	129	134	131	133	136	141	138	140	143	148	144	145	148	153	149	151	154	159	156	157	160	166	156	157	160	166	156	157	160	166			
		MBh	47.2	47.8	49.2	51.3	46.8	47.4	48.8	50.9	45.5	46.2	47.6	49.7	43.5	44.1	45.5	47.6	40.9	41.6	43.0	45.1	38.6	39.3	40.6	42.8	38.6	39.3	40.6	42.8	38.6	39.3	40.6	42.8			
		S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.68	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.68			
		ΔT	26	25	21	18	26	24	21	18	27	25	21	18	26	24	21	18	26	24	21	17	27	25	22	18	27	25	22	18	27	25	22	18			
80	1550	KW	2.78	2.78	2.77	2.8	3.10	3.10	3.09	3.12	3.45	3.45	3.45	3.5	3.84	3.84	3.83	3.86	4.27	4.27	4.26	4.3	4.77	4.77	4.76	4.79	4.77	4.77	4.76	4.79	4.77	4.77	4.76	4.79			
		Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.3	15.0	15.0	14.9	15.1	16.9	16.9	16.9	17.0	19.3	19.2	19.2	19.3	19.3	19.2	19.2	19.3	19.2	19.2	19.3	19.3			
		HI PR	260	261	263	267	300	302	303	308	343	344	346	350	389	390	392	396	438	439	441	445	491	492	493	498	491	492	493	498	491	492	493	498			
		LO PR	125	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167	157	159	162	167	157	159	162	167			
		MBh	48.1	48.8	50.2	52.3	47.7	48.4	49.8	51.9	46.5	47.2	48.5	50.7	44.4	45.1	46.5	48.6	41.9	42.5	43.9	46.0	39.6	40.2	41.6	43.7	39.6	40.2	41.6	43.7	39.6	40.2	41.6	43.7			
80	1800	S/T	1.00	0.87	0.74	0.6	1.00	0.88	0.75	0.60	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72			
		ΔT	25	23	20	17	25	23	20	16	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17	26	24	21	17	26	24	21	17			
		KW	2.80	2.80	2.79	2.8	3.12	3.11	3.11	3.13	3.47	3.47	3.46	3.5	3.86	3.85	3.85	3.87	4.29	4.28	4.28	4.3	4.79	4.79	4.78	4.81	4.79	4.79	4.78	4.81	4.79	4.79	4.78	4.81			
		Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0	15.0	15.1	17.0	17.0	17.0	17.1	19.3	19.3	19.3	19.4	19.3	19.3	19.2	19.3	19.3	19.3	19.3	19.3	19.4		
		HI PR	263	264	266	270	303	304	306	311	346	347	349	353	391	392	394	399	441	442	444	448	493	494	496	501	493	494	496	501	493	494	496	501			
80	1800	LO PR	128	130	133	138	136	137	140	145	142	144	147	152	148	149	152	157	153	155	158	163	160	161	165	170	160	161	165	170	160	161	165	170			

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
		ENTERING INDOOR WET BULB TEMPERATURE																																			
70	1550	MBh	58.8	59.6	61.3	-	58.2	59.1	60.8	-	56.7	57.5	59.3	-	54.1	54.9	56.7	-	50.9	51.7	53.5	-	48.0	48.8	50.6	-	48.0	48.8	50.6	-	48.0	48.8	50.6	-			
		S/T	0.62	0.55	0.42	-	0.62	0.55	0.43	-	0.65	0.58	0.45	-	0.66	0.59	0.47	-	0.69	0.61	0.49	-	1.00	0.66	0.54	-	1.00	0.66	0.54	-	1.00	0.66	0.54	-			
		ΔT	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	22	20	16	-	22	20	16	-	22	20	16	-			
		KW	3.43	3.42	3.42	-	3.85	3.85	3.84	-	4.33	4.33	4.32	-	4.84	4.84	4.83	-	5.42	5.42	5.41	-	6.09	6.09	6.08	-	6.09	6.09	6.08	-	6.09	6.09	6.08	-			
		Amps	13.2	13.2	13.1	-	15.1	15.1	15.1	-	17.3	17.3	17.3	-	19.7	19.6	19.6	-	22.3	22.3	22.2	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-			
70	1750	HI PR	270	271	273	-	312	313	315	-	356	358	359	-	404	405	407	-	455	457	459	-	510	511	513	-	510	511	513	-	510	511	513	-			
		LO PR	117	118	121	-	124	125	128	-	130	131	134	-	135	136	139	-	140	141	144	-	146	148	151	-	146	148	151	-	146	148	151	-			
		MBh	59.7	60.5	62.3	-	59.2	60.0	61.7	-	57.7	58.5	60.2	-	55.1	55.9	57.6	-	51.9	52.7	54.4	-	49.0	49.8	51.5	-	49.0	49.8	51.5	-	49.0	49.8	51.5	-			
		S/T	0.65	0.58	0.45	-	0.66	0.58	0.46	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	0.72	0.65	0.52	-	1.00	0.69	0.57	-	1.00	0.69	0.57	-	1.00	0.69	0.57	-			
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-	21	19	15	-	21	19	15	-			
2000	1750	KW	3.45	3.44	3.43	-	3.87	3.87	3.86	-	4.35	4.34	4.34	-	4.86	4.86	4.85	-	5.44	5.43	5.43	-	6.11	6.11	6.10	-	6.11	6.11	6.10	-	6.11	6.11	6.10	-			
		Amps	13.3	13.3	13.2	-	15.2	15.2	15.2	-	17.4	17.4	17.3	-	19.8	19.7	19.7	-	22.4	22.4	22.3	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-			
		HI PR	272	273	275	-	314	316	318	-	359	360	362	-	406	408	409	-	458	459	461	-	513	514	516	-	513	514	516	-	513	514	516	-			
		LO PR	118	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	143	146	-	148	150	153	-	148	150	153	-	148	150	153	-			
		MBh	61.2	62.0	63.7	-	60.6	61.5	63.2	-	59.1	60.0	61.7	-	56.5	57.3	59.1	-	53.3	54.2	55.9	-	50.4	51.3	53.0	-	50.4	51.3	53.0	-	50.4	51.3	53.0	-			
2000	1750	S/T	0.66	0.59	0.46	-	0.66	0.59	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.70	0.58	-	1.00	0.70	0.58	-	1.00	0.70	0.58	-			
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	20	18	14	-	20	18	14	-	20	18	14	-			
		KW	3.47	3.46	3.46	-	3.89	3.89	3.88	-	4.37	4.37	4.36	-	4.88	4.88	4.87	-	5.46	5.46	5.45	-	6.13	6.13	6.12	-	6.13	6.13	6.12	-	6.13	6.13	6.12	-			
		Amps	13.4	13.3	13.3	-	15.3	15.3	15.3	-	17.5	17.5	17.4	-	19.8	19.8	19.8	-	22.5	22.5	22.4	-	25.6	25.6	25.5	-	25.6	25.6	25.5	-	25.6	25.6	25.5	-			
		HI PR	275	276	278	-	317	319	320	-	362	363	365	-	409	410	412	-	461	462	464	-	516	517	519	-	516	517	519	-	516	517	519	-			
2000	1750	LO PR	121	123	126	-	128	130	133	-	134	136	139	-	140	141	144	-	145	146	149	-	151	152	155	-	151	152	155	-	151	152	155	-			

	1550	MBh	58.8	59.6	61.3	64.0	58.3	59.1	60.8	63.5	56.8	57.6	59.3	62.0	54.1	55.0	56.7	59.3	51.0	51.8	53.5	56.2	48.1	48.9	50.6	53.3	48.1	48.9	50.6	53.3	48.1	48.9	50.6	53.3	
		S/T	0.74	0.67	0.54	0.41	0.74	0.67	0.55	0.41	0.77	0.70	0.57	0.44	1.00	0.71	0.59	0.46	1.00	0.73	0.61	0.48	1.00	0.78	0.66	0.52	1.00	0.78	0.66	0.52	1.00	0.78	0.66	0.52	
		ΔT	25	23	20	16	25	23	19	16	26	24	20	16	25	23	19	16	25	23	19	15	26	24	20	17	26	24	20	17	26	24	20	17	
		KW	3.42	3.42	3.41	3.45	3.85	3.85	3.84	3.87	4.33	4.33	4.32	4.35	4.84	4.84	4.83	4.86	5.42	5.41	5.41	5.44	6.09	6.09	6.08	6.11	6.09	6.09	6.08	6.11	6.09	6.09	6.08	6.11	
		Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.2	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5	
	1750	HI PR	270	271	273	278	312	314	315	320	357	358	360	364	404	405	407	412	456	457	459	463	511	512	514	518	511	512	514	518	511	512	514	518	
		LO PR	117	118	121	126	124	125	128	133	130	131	134	139	135	136	139	144	140	141	144	149	146	148	151	155	146	148	151	155	146	148	151	155	
		MBh	59.7	60.6	62.3	64.9	59.2	60.0	61.8	64.4	57.7	58.5	60.3	62.9	55.1	55.9	57.6	60.3	51.9	52.7	54.5	57.1	49.0	49.8	51.6	54.2	49.0	49.8	51.6	54.2	49.0	49.8	51.6	54.2	
		S/T	0.77	0.70	0.57	0.44	0.78	0.70	0.58	0.45	0.80	0.73	0.60	0.47	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.51	1.00	0.81	0.69	0.56	1.00	0.81	0.69	0.56	1.00	0.81	0.69	0.56	
		ΔT	24	22	18	15	24	22	18	14	25	23	19	15	24	22	18	14	24	22	18	14	25	23	19	15	25	23	19	15	25	23	19	15	
	1750	KW	3.44	3.44	3.43	3.46	3.87	3.87	3.86	3.89	4.34	4.34	4.33	4.37	4.86	4.86	4.85	4.88	5.44	5.43	5.42	5.46	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13	
		Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.4	25.4	25.6	25.5	25.5	25.4	25.6	25.5	25.4	25.6	25.5	25.6
		HI PR	272	274	276	280	315	316	318	322	359	360	362	367	407	408	410	414	458	459	461	466	513	514	516	521	513	514	516	521	513	514	516	521	
		LO PR	118	120	123	128	125	127	130	135	132	133	136	141	137	138	141	146	142	143	146	151	148	150	153	157	148	150	153	157	148	150	153	157	
		MBh	61.2	62.0	63.8	66.4	60.7	61.5	63.2	65.9	59.2	60.0	61.7	64.4	56.6	57.4	59.1	61.8	53.4	54.2	55.9	58.6	50.5	51.3	53.0	55.7	50.5	51.3	53.0	55.7	50.5	51.3	53.0	55.7	
	2000	S/T	0.78	0.71	0.58	0.45	0.78	0.71	0.59	0.46	1.00	0.74	0.61	0.48	1.00	0.75	0.63	0.50	1.00	0.78	0.65	0.52	1.00	0.82	0.70	0.56	1.00	0.82	0.70	0.56	1.00	0.82	0.70	0.56	
		ΔT	23	21	17	13	23	21	17	13	23	21	18	14	23	21	17	13	23	21	17	13	24	22	18	14	24	22	18	14	24	22	18	14	
		KW	3.46	3.46	3.45	3.49	3.89	3.89	3.88	3.91	4.37	4.36	4.36																						

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1550	MBh	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.4	55.3	57.0	59.6	51.3	52.1	53.8	56.5	48.4	49.2	50.9	53.6	48.4	49.2	50.9	53.6							
		S/T	0.85	0.78	0.66	0.5	1.00	0.79	0.66	0.53	1.00	0.81	0.69	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.72	0.6	1.00	1.00	0.77	0.64	1.00	1.00	0.77	0.64							
		ΔT	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20							
		KW	3.43	3.42	3.42	3.5	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.4	4.84	4.84	4.83	4.87	5.42	5.42	5.41	5.4	6.09	6.09	6.08	6.12	6.09	6.09	6.08	6.12							
		Amps	13.2	13.2	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.3	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5							
80	1750	HI PR	271	272	274	278	313	314	316	321	357	358	360	365	405	406	408	413	456	457	459	464	511	512	514	519	511	512	514	519							
		LO PR	117	118	121	126	124	125	128	133	130	132	135	139	135	137	140	145	140	142	145	150	147	148	151	156	147	148	151	156							
		MBh	60.0	60.9	62.6	65.2	59.5	60.3	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	57.9	60.6	52.2	53.0	54.8	57.4	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5							
		S/T	0.89	0.81	0.69	0.6	1.00	0.82	0.70	0.56	1.00	0.84	0.72	0.6	1.00	0.86	0.74	0.60	1.00	0.88	0.76	0.6	1.00	1.00	0.80	0.67	1.00	1.00	0.80	0.67							
		ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	26	23	19	30	28	24	20	30	28	24	20							
80	1750	KW	3.44	3.44	3.43	3.5	3.87	3.87	3.86	3.89	4.35	4.34	4.34	4.4	4.86	4.86	4.85	4.88	5.44	5.43	5.43	5.5	6.11	6.11	6.10	6.13	6.11	6.11	6.10	6.13							
		Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6	25.5	25.5	25.4	25.6							
		HI PR	273	274	276	281	315	316	318	323	359	361	362	367	407	408	410	415	458	460	462	466	513	514	516	521	513	514	516	521							
		LO PR	119	120	123	128	126	127	130	135	132	134	136	141	137	139	142	146	142	144	147	152	149	150	153	158	149	150	153	158							
		MBh	61.5	62.3	64.1	66.7	61.0	61.8	63.5	66.2	59.5	60.3	62.0	64.7	56.9	57.7	59.4	62.1	53.7	54.5	56.2	58.9	50.8	51.6	53.3	56.0	50.8	51.6	53.3	56.0							
80	2000	S/T	0.89	0.82	0.70	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.73	0.6	1.00	0.87	0.75	0.61	1.00	1.00	0.77	0.6	1.00	1.00	0.81	0.68	1.00	1.00	0.81	0.68							
		ΔT	28	26	22	18	28	26	22	18	28	26	22	18	28	26	22	18	27	25	21	18	29	27	23	19	27	25	21	18							
		KW	3.47	3.46	3.46	3.5	3.89	3.89	3.88	3.91	4.37	4.36	4.36	4.4	4.88	4.88	4.87	4.90	5.46	5.46	5.45	5.5	6.13	6.13	6.12	6.16	6.13	6.13	6.12	6.16							
		Amps	13.4	13.3	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.4	17.6	19.8	19.8	19.8	19.9	22.5	22.5	22.4	22.6	25.6	25.6	25.5	25.7	25.6	25.6	25.5	25.7							
		HI PR	276	277	279	284	318	319	321	326	362	364	365	370	410	411	413	418	461	463	464	469	516	517	519	524	516	517	519	524							
80	2000	LO PR	122	123	126	131	129	130	133	138	135	136	139	144	140	142	144	149	145	147	150	154	152	153	156	161	152	153	156	161							
		85	1550	MBh	60.1	60.9	62.6	65.3	59.5	60.4	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	58.0	60.6	52.2	53.1	54.8	57.4	49.3	50.2	51.9	54.5	49.3	50.2	51.9	54.5					
				S/T	1.00	0.88	0.75	0.62	1.00	0.88	0.76	0.62	1.00	0.91	0.78	0.65	1.00	1.00	0.80	0.67	1.00	1.00	0.82	0.69	1.00	1.00	0.87	0.73	1.00	1.00	0.87	0.73					
				ΔT	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	35	33	29	25	35	33	29	25					
				KW	3.43	3.43	3.42	3.46	3.86	3.86	3.85	3.88	4.34	4.33	4.33	4.36	4.85	4.85	4.84	4.87	5.43	5.42	5.42	5.45	6.10	6.10	6.09	6.12	6.10	6.10	6.09	6.12					
Amps	13.2			13.2	13.2	13.3	15.2	15.1	15.1	15.3	17.3	17.3	17.3	17.4	19.7	19.7	19.7	19.8	22.3	22.3	22.3	22.4	25.4	25.4	25.4	25.5	25.4	25.4	25.3	25.5							
85	1750	HI PR	272	273	275	280	314	315	317	322	358	360	361	366	406	407	409	414	457	459	460	465	512	513	515	520	512	513	515	520							
		LO PR	119	120	123	128	126	127	130	135	132	133	136	141	137	138	141	146	142	144	146	151	148	150	153	158	148	150	153	158							
		MBh	61.0	61.8	63.6	66.2	60.5	61.3	63.0	65.7	59.0	59.8	61.5	64.2	56.4	57.2	58.9	61.6	53.2	54.0	55.7	58.4	50.3	51.1	52.8	55.5	50.3	51.1	52.8	55.5							
		S/T	1.00	0.91	0.78	0.65	1.00	0.91	0.79	0.66	1.00	0.94	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	0.85	0.72	1.00	1.00	0.90	0.77	1.00	1.00	0.90	0.77							
		ΔT	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	34	32	28	24	34	32	28	24							
85	1750	KW	3.45	3.45	3.44	3.48	3.88	3.88	3.87	3.90	4.36	4.35	4.34	4.38	4.87	4.87	4.86	4.89	5.45	5.44	5.44	5.47	6.12	6.12	6.11	6.14	6.12	6.12	6.11	6.14							
		Amps	13.3	13.3	13.3	13.4	15.3	15.2	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.7	19.9	22.4	22.4	22.4	22.5	25.5	25.5	25.5	25.6	25.5	25.5	25.4	25.6							
		HI PR	274	275	277	282	316	318	319	324	361	362	364	368	408	410	411	416	460	461	463	467	515	516	518	522	515	516	518	522							
		LO PR	121	122	125	130	128	129	132	137	134	135	138	143	139	140	143	148	144	145	148	153	150	152	155	160	150	152	155	160							
		MBh	62.5	63.3	65.0	67.7	62.0	62.8	64.5	67.2	60.4	61.3	63.0	65.6	57.8	58.7	60.4	63.0	54.7	55.5	57.2	59.9	51.7	52.6	54.3	56.9	51.7	52.6	54.3	56.9							
85	2000	S/T	1.00	0.92	0.79	0.66	1.00	0.92	0.80	0.67	1.00	1.00	0.82	0.69	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.73	1.00	1.00	0.91	0.77	1.00	1.00	0.91	0.77							
		ΔT	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	31	29	26	22	33	31	27	23	33	31	27	23							
		KW	3.47	3.47	3.46	3.50	3.90	3.90	3.89	3.92	4.38	4.37	4.37	4.40	4.89	4.89	4.88	4.91	5.47	5.46	5.46	5.49	6.14	6.14	6.13	6.16	6.14	6.14	6.13	6.16							
		Amps	13.4	13.4	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.5	17.6	19.9	19.9	19.8	20.0	22.5	22.5	22.5	22.6	25.6	25.6	25.6	25.7	25.6	25.6	25.5	25.7							
		HI PR	277	278	280	285	319	321	322	327	364	365	367	371	411	412	414	419	463	464	466	470	518	519	521	525	518	519	521	525							

DX14SA0181A* / CA*F3636*6** W/.052" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	19,300	13,124	6,176	1,220
80	19,050	13,142	5,908	1,290
85	18,800	13,160	5,640	1,360
90	18,400	13,060	5,340	1,435
95	18,000	12,960	5,040	1,510
100	17,500	12,770	4,730	1,595
105	17,000	12,580	4,420	1,680
110	16,550	12,650	3,901	1,780
115	16,100	12,719	3,381	1,880
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	17,400	12,700	4,700	1,510

DX14SA0191A* / CA*F3636*6** W/.053" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	18,900	13,041	5,859	1,160
80	18,650	13,145	5,506	1,225
85	18,400	13,248	5,152	1,290
90	18,000	13,136	4,864	1,360
95	17,600	13,024	4,576	1,430
100	17,100	12,820	4,280	1,530
105	16,600	12,616	3,984	1,590
110	16,150	12,667	3,484	1,680
115	15,700	12,717	2,983	1,770
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	17,000	12,750	4,250	1,430

DX14SA0241A* / CA*F3636*6** W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	24,877	16,961	7,916	1,554
80	24,568	17,040	7,528	1,644
85	24,260	17,120	7,140	1,735
90	23,730	16,961	6,769	1,833
95	23,200	16,802	6,397	1,931
100	22,552	16,564	5,988	2,040
105	21,904	16,326	5,578	2,149
110	21,312	16,393	4,919	2,278
115	20,721	16,461	4,260	2,406
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	22,400	16,802	5,598	1,931

DX14SA0251A* / CA*F3636*6** W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	25,500	17,085	8,415	1,570
80	25,200	17,258	7,943	1,660
85	24,900	17,430	7,470	1,750
90	24,350	17,283	7,067	1,850
95	23,800	17,136	6,664	1,950
100	23,150	16,893	6,257	2,060
105	22,500	16,650	5,850	2,170
110	21,900	16,739	5,162	2,300
115	21,300	16,827	4,473	2,430
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	23,000	16,790	6,210	1,950

DX14SA0301A* / CA*F3642*6** W/.065" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,900	21,630	9,270	1,960
80	30,500	21,651	8,849	2,070
85	30,100	21,672	8,428	2,180
90	29,450	21,492	7,958	2,300
95	28,800	21,312	7,488	2,420
100	28,000	20,992	7,008	2,550
105	27,200	20,672	6,528	2,680
110	26,450	20,745	5,706	2,840
115	25,700	20,817	4,883	3,000
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,800	20,850	6,950	2,420

DX14SA0311A* / CA*F3137*6** W/.063" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,700	22,718	7,982	1,920
80	30,300	22,871	7,430	2,025
85	29,900	23,023	6,877	2,130
90	29,250	22,809	6,442	2,245
95	28,600	22,594	6,006	2,360
100	27,800	22,232	5,568	2,490
105	27,000	21,870	5,130	2,620
110	26,250	21,900	4,350	2,770
115	25,500	21,930	3,570	2,920
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,600	20,080	5,520	2,360

DX14SA0361A* / CA*F3642*6** W/.068" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1200 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,700	25,690	11,010	2,330
80	36,250	25,733	10,517	2,460
85	35,800	25,776	10,024	2,590
90	35,000	25,542	9,458	2,730
95	34,200	25,308	8,892	2,870
100	33,250	24,928	8,322	3,030
105	32,300	24,548	7,752	3,190
110	31,400	24,627	6,774	3,370
115	30,500	24,705	5,795	3,550
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	33,000	24,750	8,250	2,870

DX14SA0371A* / CA*F3137*6** W/.071" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1100 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,500	25,915	10,585	2,260
80	36,050	26,130	9,921	2,400
85	35,600	26,344	9,256	2,540
90	34,800	26,092	8,708	2,675
95	34,000	25,840	8,160	2,810
100	33,050	25,439	7,611	2,970
105	32,100	25,038	7,062	3,130
110	31,250	25,135	6,115	3,315
115	30,400	25,232	5,168	3,500
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	32,800	25,256	7,544	2,810

DX14SA0421A* / CA*F4961*6** W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
95	39,000	30,810	8,190	3,220
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	30,080	7,520	3,220

DX14SA0431A* / CA*F4961*6D* W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
95	39,000	30,810	8,190	3,220
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	30,080	7,520	3,220

DX14SA0481A* / CA*F4860*6** W/.078" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	48,300	31,878	16,422	3,080
80	47,700	32,189	15,511	3,255
85	47,100	32,500	14,600	3,430
90	46,050	32,225	13,825	3,625
95	45,000	31,950	13,050	3,820
100	43,750	31,488	12,263	4,035
105	42,500	31,025	11,475	4,250
110	41,350	31,191	10,160	4,500
115	40,200	31,356	8,844	4,750
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	43,400	31,248	12,152	3,820

DX14SA0601A* / CA*F4961*6** W/.088" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	61,100	40,326	20,774	3,840
80	60,350	40,725	19,625	4,080
85	59,600	41,124	18,476	4,320
90	58,300	40,512	17,788	4,575
95	57,000	39,900	17,100	4,830
100	55,400	39,318	16,082	5,120
105	53,800	38,736	15,064	5,410
110	52,350	38,965	13,386	5,745
115	50,900	39,193	11,707	6,080
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	55,000	39,050	15,950	4,840

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0181A*	ARUF25B14A*		17,800	12,800	14.0	11.5	570	7989022
	ASPT24B14A*		18,000	13,000	14.5	12.0	605	7541234
	ASPT25B14A*		17,800	12,800	14.5	12.0	580	8245714
	ASPT29B14A*		18,000	13,000	15.0	12.5	560	8245715
	ASPT30C14A*		18,400	13,300	14.5	12.0	580	7541237
	AWUF31XX16A*		17,400	12,500	14.5	11.5	600	7541242
	AWUF32XX16A*		17,400	12,500	14.5	11.5	600	7541243
	CA*F3636*6D*+EEP+TXV		17,800	12,800	14.0	11.5	600	7541245
	CA*F3636*6D*+MBVC1200**-1A*+TXV		17,800	12,800	14.5	11.5	600	7541247
	CA*F3636*6D*+TXV	D*80HE0603B*A*	18,000	13,000	14.5	11.5	670	7543308
	CA*F3636*6D*+TXV	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7543314
	CA*F3636*6D*+TXV	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7543321
	CA*F3636*6D*+TXV	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7543327
	CA*F3636*6D*+TXV	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7543334
	CA*F3636*6D*+TXV	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7543340
	CA*F3636*6D*+TXV	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7543346
	CA*F3636*6D*+TXV	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7543353
	CA*F3636*6D*+TXV	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7543359
	CA*F3636*6D*+TXV	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7543366
	CA*F3636*6D*+TXV	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7543372
	CA*F3743*6D*+EEP+TXV		18,000	13,000	14.5	11.5	600	7541249
	CAPT3743*4A*	D*80HE0603B*A*	18,000	13,000	14.5	11.5	670	7543310
	CAPT3743*4A*	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7543316
	CAPT3743*4A*	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7543322
	CAPT3743*4A*	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7543329
	CAPT3743*4A*	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7543336
	CAPT3743*4A*	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7543342
	CAPT3743*4A*	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7543348
	CAPT3743*4A*	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7543355
	CAPT3743*4A*	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7543361
	CAPT3743*4A*	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7543367
	CAPT3743*4A*	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7543374
	CAPT3743*4A*+EEP		17,800	12,800	14.0	11.5	550	7541251
	CAPT3743*4A*+MBVC1200**-1A*		17,400	12,500	14.5	12.0	535	7541253
	CHPF2430B6C*+EEP+TXV		17,800	12,800	14.0	11.5	600	7541255
	CHPF2430B6C*+MBVC1200**-1A*+TXV		17,800	12,800	14.5	11.5	600	7541256
	CHPF2430B6C*+TXV	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7541266
	CHPF3636B6C*+EEP+TXV		18,000	13,000	14.5	11.5	600	7541258
	CHPF3636B6C*+TXV	D*80HE0603B*A*	18,000	13,000	14.5	11.5	670	7543312
	CHPF3636B6C*+TXV	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7543324
	CHPF3636B6C*+TXV	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7543331
	CHPF3636B6C*+TXV	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7543337
	CHPF3636B6C*+TXV	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7543344
	CHPF3636B6C*+TXV	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7543350
	CHPF3636B6C*+TXV	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7543356
	CHPF3636B6C*+TXV	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7543363
	CHPF3636B6C*+TXV	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7543369

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0181A* (cont.)	CHPF3636B6C*+TXV	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7543376
	CSCF3036N6D*+EEP+TXV		17,800	12,800	14.0	11.5	600	7541260
	CSCF3036N6D*+TXV	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7541270
	CSCF3036N6D*+TXV	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7541273
	CSCF3036N6D*+TXV	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7541276
	CSCF3036N6D*+TXV	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7541280
	CSCF3036N6D*+TXV	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7541283
	CSCF3036N6D*+TXV	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7541286
	CSCF3036N6D*+TXV	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7541290
	CSCF3036N6D*+TXV	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7541293
	CSCF3036N6D*+TXV	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7541296
	CSCF3036N6D*+TXV	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7543319
	CSCF3642N6D*+EEP+TXV		18,000	13,000	14.5	11.5	600	7541261
	DV24PTCB14A*		18,000	13,000	14.5	12.0	600	7541238
	DV30PTCC14A*		18,400	13,300	14.5	12.0	615	7541240
DX14SA 0191A*	ARUF25B14A*		17,800	13,100	14.0	12.2	570	7989023
	ASPT24B14A*		17,800	13,100	14.5	12.2	525	7541298
	ASPT25B14A*		17,800	13,100	14.5	12.2	580	8245716
	ASPT29B14A*		18,000	13,300	15.0	12.5	560	8245717
	ASPT30C14A*		18,000	13,300	15.0	12.5	600	7541300
	AWUF31XX16A*		17,200	12,700	15.0	12.5	550	7541305
	AWUF32XX16A*		17,200	12,700	15.0	12.5	550	7541306
	CA*F3636*6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7541308
	CA*F3636*6D*+MBVC1200**-1A*+TXV		18,000	13,300	15.0	12.5	600	7541310
	CA*F3636*6D*+TXV	D*80HE0603B*A*	17,800	13,100	15.0	12.5	600	7541323
	CA*F3636*6D*+TXV	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7541329
	CA*F3636*6D*+TXV	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7541337
	CA*F3636*6D*+TXV	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7541344
	CA*F3636*6D*+TXV	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7541351
	CA*F3636*6D*+TXV	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7541359
	CA*F3636*6D*+TXV	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7541366
	CA*F3636*6D*+TXV	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7541373
	CA*F3636*6D*+TXV	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7541381
	CA*F3636*6D*+TXV	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7541388
	CA*F3636*6D*+TXV	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7541395
	CA*F3743*6D*+EEP+TXV		18,000	13,300	14.5	12.2	550	7541312
	CAPT3743*4A*	D*80HE0603B*A*	17,800	13,100	15.0	12.5	600	7541325
	CAPT3743*4A*	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7541331
	CAPT3743*4A*	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7541339
	CAPT3743*4A*	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7541346
	CAPT3743*4A*	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7541353
	CAPT3743*4A*	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7541360
	CAPT3743*4A*	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7541368
	CAPT3743*4A*	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7541375
	CAPT3743*4A*	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7541383
	CAPT3743*4A*	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7541389
	CAPT3743*4A*	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7541397
	CAPT3743*4A*+EEP		17,600	13,000	14.0	12.2	550	7541314
	CAPT3743*4A*+MBVC1200**-1A*		17,800	13,100	15.0	12.5	600	7541316
	CHPF3636B6C*+EEP+TXV		17,600	13,000	14.5	12.2	550	7541317
	CHPF3636B6C*+MBVC1200**-1A*+TXV		18,200	13,400	15.0	12.5	600	7541319
	CHPF3636B6C*+TXV	D*80HE0603B*A*	17,800	13,100	15.0	12.5	600	7541327
	CHPF3636B6C*+TXV	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7541333

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0191A* (cont.)	CHPF3636B6C*+TXV	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7541341
	CHPF3636B6C*+TXV	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7541348
	CHPF3636B6C*+TXV	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7541355
	CHPF3636B6C*+TXV	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7541362
	CHPF3636B6C*+TXV	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7541370
	CHPF3636B6C*+TXV	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7541377
	CHPF3636B6C*+TXV	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7541384
	CHPF3636B6C*+TXV	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7541391
	CHPF3636B6C*+TXV	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7541399
	CSCF3036N6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7541321
	CSCF3036N6D*+TXV	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7541335
	CSCF3036N6D*+TXV	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7541342
	CSCF3036N6D*+TXV	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7541350
	CSCF3036N6D*+TXV	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7541357
	CSCF3036N6D*+TXV	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7541364
	CSCF3036N6D*+TXV	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7541372
	CSCF3642N6D*+TXV	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7541379
	CSCF3642N6D*+TXV	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7541386
	CSCF3642N6D*+TXV	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7541393
	CSCF3642N6D*+TXV	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7541401
DX14SA 0241A*	DV24PTCB14A*		17,800	13,100	14.5	12.2	600	7541301
	DV30PTCC14A*		18,200	13,400	15.0	12.5	615	7541303
	ARUF29B14A*		23,600	17,100	14.0	11.5	860	7989024
	ARUF31B14A*		23,600	17,100	14.0	11.5	870	7989025
	ASPT24B14A*		23,000	16,700	14.0	11.5	810	7541403
	ASPT25B14A*		23,000	16,700	14.5	12.0	800	8245718
	ASPT29B14A*		23,600	17,100	15.0	12.5	790	8245719
	ASPT30C14A*		23,600	17,100	14.5	12.0	845	7541405
	AWUF31XX16A*		23,000	16,700	14.5	11.5	800	7541411
	AWUF32XX16A*		23,000	16,700	14.5	11.5	800	7541413
	CA*F3636*6D*	D*80HE0603B*A*	23,600	17,100	14.5	11.5	725	7541444
	CA*F3636*6D*	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541452
	CA*F3636*6D*	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541465
	CA*F3636*6D*	D*96VC0403BNA*	23,600	17,100	14.5	11.5	805	7541479
	CA*F3636*6D*	D*96VC0603BNA*	23,600	17,100	14.5	11.5	820	7541493
	CA*F3636*6D*	D*96VC0803BNA*	23,600	17,100	14.5	11.5	820	7541505
	CA*F3636*6D*	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541519
	CA*F3636*6D*	D*97MC0603BNA*	23,600	17,100	14.5	11.5	820	7541533
	CA*F3636*6D*	D*97MC0803BNA*	23,600	17,100	14.5	11.5	800	7541548
	CA*F3636*6D*	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541560
	CA*F3636*6D*	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541572
	CA*F3636*6D*	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541579
	CA*F3636*6D*	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541586
	CA*F3636*6D*	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541593
	CA*F3636*6D*+EEP		23,600	17,100	14.0	11.5	725	7541415
	CA*F3636*6D*+EEP+TXV		23,600	17,100	14.0	11.5	725	7541416
	CA*F3636*6D*+MBVC1200**-1A*		23,600	17,100	14.5	12.0	725	7541418
	CA*F3636*6D*+TXV	D*80HE0603B*A*	23,600	17,100	14.5	11.5	725	7541445
	CA*F3636*6D*+TXV	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541454
	CA*F3636*6D*+TXV	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541467
	CA*F3636*6D*+TXV	D*96VC0403BNA*	23,600	17,100	14.5	11.5	805	7541481
	CA*F3636*6D*+TXV	D*96VC0603BNA*	23,600	17,100	14.5	11.5	820	7541494
	CA*F3636*6D*+TXV	D*96VC0803BNA*	23,600	17,100	14.5	11.5	800	7541507

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0241A* (cont.)	CA*F3636*6D*+TXV	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541521
	CA*F3636*6D*+TXV	D*97MC0603BNA*	23,600	17,100	14.5	11.5	820	7541535
	CA*F3636*6D*+TXV	D*97MC0803BNA*	23,600	17,100	14.5	11.5	800	7541550
	CA*F3636*6D*+TXV	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541562
	CA*F3636*6D*+TXV	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541573
	CA*F3636*6D*+TXV	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541580
	CA*F3636*6D*+TXV	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541587
	CA*F3636*6D*+TXV	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541594
	CA*F3642*6D*+EEP		23,600	17,100	14.0	11.5	725	7541419
	CA*F3743*6D*+EEP		23,600	17,100	14.0	11.5	725	7541421
	CA*F3743*6D*+EEP+TXV		23,600	17,100	14.5	12.0	725	7541423
	CAPT3743*4A*	D*80HE0603B*A*	23,600	17,100	14.5	11.5	725	7541447
	CAPT3743*4A*	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541456
	CAPT3743*4A*	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541469
	CAPT3743*4A*	D*96VC0403BNA*	23,400	16,900	14.5	11.5	805	7541483
	CAPT3743*4A*	D*96VC0603BNA*	23,400	16,900	14.5	11.5	820	7541496
	CAPT3743*4A*	D*96VC0803BNA*	23,400	16,900	14.5	11.5	800	7541509
	CAPT3743*4A*	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541523
	CAPT3743*4A*	D*97MC0603BNA*	23,400	16,900	14.5	11.5	820	7541536
	CAPT3743*4A*	D*97MC0803BNA*	23,400	16,900	14.5	11.5	800	7541546
	CAPT3743*4A*	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541564
	CAPT3743*4A*	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541574
	CAPT3743*4A*	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541581
	CAPT3743*4A*	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541588
	CAPT3743*4A*	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541595
	CAPT3743*4A*+EEP		23,000	16,700	14.0	11.5	725	7541425
	CAPT3743*4A*+MBVC1200**-1A*		23,600	17,100	14.5	12.0	760	7541427
	CHPF3636B6C*	D*80HE0603B*A*	23,600	17,100	14.5	11.5	725	7541449
	CHPF3636B6C*	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541458
	CHPF3636B6C*	D*96VC0403BNA*	23,600	17,100	14.5	11.5	805	7541485
	CHPF3636B6C*	D*96VC0603BNA*	23,600	17,100	14.5	11.5	820	7541498
	CHPF3636B6C*	D*96VC0803BNA*	23,600	17,100	14.5	11.5	800	7541511
	CHPF3636B6C*	D*97MC0603BNA*	23,600	17,100	14.5	11.5	820	7541538
	CHPF3636B6C*	D*97MC0803BNA*	23,600	17,100	14.5	11.5	800	7541552
	CHPF3636B6C*	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541575
	CHPF3636B6C*	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541582
	CHPF3636B6C*	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541589
	CHPF3636B6C*	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541596
	CHPF3636B6C*+EEP		23,600	17,100	14.0	11.5	725	7541428
	CHPF3636B6C*+EEP+TXV		23,600	17,100	14.5	11.5	725	7541430
	CHPF3636B6C*+MBVC1200**-1A*		23,600	17,100	14.5	12.0	725	7541431
	CHPF3636B6C*+TXV	D*80HE0603B*A*	23,600	17,100	14.5	11.5	725	7541451
	CHPF3636B6C*+TXV	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541460
	CHPF3636B6C*+TXV	D*96VC0403BNA*	23,600	17,100	14.5	11.5	805	7541487
	CHPF3636B6C*+TXV	D*96VC0603BNA*	23,600	17,100	14.5	11.5	820	7541500
	CHPF3636B6C*+TXV	D*96VC0803BNA*	23,600	17,100	14.5	11.5	800	7541513
	CHPF3636B6C*+TXV	D*97MC0603BNA*	23,600	17,100	14.5	11.5	820	7541540
	CHPF3636B6C*+TXV	D*97MC0803BNA*	23,600	17,100	14.5	11.5	800	7541554
	CHPF3636B6C*+TXV	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541576
	CHPF3636B6C*+TXV	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541583
	CHPF3636B6C*+TXV	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541590
	CHPF3636B6C*+TXV	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541597
	CHPF3642C6C*	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541471

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0241A* (cont.)	CHPF3642C6C*	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541525
	CHPF3642C6C*	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541565
	CHPF3642C6C*+EEP		23,600	17,100	14.0	11.5	725	7541433
	CHPF3642C6C*+EEP+TXV		23,600	17,100	14.5	11.5	725	7541435
	CHPF3642C6C*+TXV	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541473
	CHPF3642C6C*+TXV	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541527
	CHPF3642C6C*+TXV	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541567
	CSCF3036N6D*	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541461
	CSCF3036N6D*	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541475
	CSCF3036N6D*	D*96VC0403BNA*	23,600	17,100	14.5	11.5	805	7541489
	CSCF3036N6D*	D*96VC0603BNA*	23,600	17,100	14.5	11.5	820	7541502
	CSCF3036N6D*	D*96VC0803BNA*	23,600	17,100	14.5	11.5	800	7541515
	CSCF3036N6D*	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541529
	CSCF3036N6D*	D*97MC0603BNA*	23,600	17,100	14.5	11.5	820	7541542
	CSCF3036N6D*	D*97MC0803BNA*	23,600	17,100	14.5	11.5	800	7541556
	CSCF3036N6D*	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541569
	CSCF3036N6D*	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541577
	CSCF3036N6D*	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541584
	CSCF3036N6D*	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541591
	CSCF3036N6D*	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541598
	CSCF3036N6D*+EEP		23,600	17,100	14.0	11.5	800	7541437
	CSCF3036N6D*+EEP+TXV		23,600	17,100	14.0	11.5	800	7541438
	CSCF3036N6D*+TXV	D*80VC0604B*A*	23,600	17,100	14.5	11.5	750	7541463
	CSCF3036N6D*+TXV	D*80VC0805C*A*	23,600	17,100	14.5	11.5	730	7541477
	CSCF3036N6D*+TXV	D*96VC0403BNA*	23,600	17,100	14.5	11.5	805	7541491
	CSCF3036N6D*+TXV	D*96VC0603BNA*	23,600	17,100	14.5	11.5	820	7541504
	CSCF3036N6D*+TXV	D*96VC0803BNA*	23,600	17,100	14.5	11.5	800	7541517
	CSCF3036N6D*+TXV	D*96VC0804CNA*	23,600	17,100	14.5	11.5	810	7541531
	CSCF3036N6D*+TXV	D*97MC0603BNA*	23,600	17,100	14.5	11.5	820	7541544
	CSCF3036N6D*+TXV	D*97MC0803BNA*	23,600	17,100	14.5	11.5	800	7541558
	CSCF3036N6D*+TXV	D*97MC0804CNA*	23,600	17,100	14.5	11.5	810	7541571
	CSCF3036N6D*+TXV	D*96VE0302BNA*	23,400	16,900	14.5	11.5	750	7541578
	CSCF3036N6D*+TXV	D*96VE0402BNA*	23,400	16,900	14.5	11.5	775	7541585
	CSCF3036N6D*+TXV	D*96VE0603BNA*	23,400	16,900	14.5	11.5	725	7541592
	CSCF3036N6D*+TXV	D*96VE0803BNA*	23,400	16,900	14.5	11.5	750	7541599
	CSCF3642N6D*+EEP		23,600	17,100	14.0	11.5	725	7541440
	CSCF3642N6D*+EEP+TXV		23,600	17,100	14.0	11.5	725	7541442
	DV24PTCB14A*		23,000	16,700	14.0	11.5	795	7541407
	DV30PTCC14A*		23,600	17,100	14.5	12.0	780	7541409
DX14SA 0251A*	ARUF29B14A*		23,600	16,900	14.0	12.2	860	7989026
	ARUF31B14A*		23,600	16,900	14.0	12.2	870	7989027
	ASPT24B14A*		23,000	16,500	14.0	12.2	810	7541600
	ASPT25B14A*		23,600	16,900	14.5	12.2	800	8245720
	ASPT29B14A*		24,000	17,200	15.0	12.5	790	8245721
	ASPT30C14A*		23,600	16,900	15.0	12.5	845	7541601
	AWUF31XX16A*		23,000	16,500	14.5	12.2	800	7541604
	AWUF32XX16A*		23,000	16,500	14.5	12.2	800	7541605
	CA*F3636*6D*	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	7541618
	CA*F3636*6D*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541623
	CA*F3636*6D*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541630
	CA*F3636*6D*	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	7541637
	CA*F3636*6D*	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	7541644
	CA*F3636*6D*	D*96VC0803BNA*	23,600	16,900	15.0	12.5	820	7541651

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0251A* (cont.)	CA*F3636*6D*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541658
	CA*F3636*6D*	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	7541665
	CA*F3636*6D*	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	7541673
	CA*F3636*6D*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541679
	CA*F3636*6D*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	7541686
	CA*F3636*6D*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	7541693
	CA*F3636*6D*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	775	7541700
	CA*F3636*6D*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	7541707
	CA*F3636*6D*+EEP		23,600	16,900	14.0	12.2	725	7541606
	CA*F3636*6D*+EEP+TXV		23,600	16,900	14.0	12.2	725	7541607
	CA*F3636*6D*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	7541608
	CA*F3636*6D*+TXV	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	7541619
	CA*F3636*6D*+TXV	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541624
	CA*F3636*6D*+TXV	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541631
	CA*F3636*6D*+TXV	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	7541638
	CA*F3636*6D*+TXV	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	7541645
	CA*F3636*6D*+TXV	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	7541652
	CA*F3636*6D*+TXV	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541659
	CA*F3636*6D*+TXV	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	7541666
	CA*F3636*6D*+TXV	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	7541674
	CA*F3636*6D*+TXV	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541680
	CA*F3636*6D*+TXV	D*96VE0302BNA*	23,400	16,800	15.0	12.5	750	7541687
	CA*F3636*6D*+TXV	D*96VE0402BNA*	23,400	16,800	15.0	12.5	775	7541694
	CA*F3636*6D*+TXV	D*96VE0603BNA*	23,400	16,800	15.0	12.5	775	7541701
	CA*F3636*6D*+TXV	D*96VE0803BNA*	23,400	16,800	15.0	12.5	750	7541708
	CA*F3743*6D*+EEP		23,800	17,000	14.0	12.2	725	7541609
	CA*F3743*6D*+EEP+TXV		23,800	17,000	14.5	12.2	725	7541610
	CAPT3743*4A*	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	7541620
	CAPT3743*4A*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541625
	CAPT3743*4A*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541632
	CAPT3743*4A*	D*96VC0403BNA*	23,400	16,800	15.0	12.5	805	7541639
	CAPT3743*4A*	D*96VC0603BNA*	23,400	16,800	15.0	12.5	820	7541646
	CAPT3743*4A*	D*96VC0803BNA*	23,400	16,800	15.0	12.5	800	7541653
	CAPT3743*4A*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541660
	CAPT3743*4A*	D*97MC0603BNA*	23,400	16,800	15.0	12.5	820	7541667
	CAPT3743*4A*	D*97MC0803BNA*	23,400	16,800	15.0	12.5	800	7541672
	CAPT3743*4A*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541681
	CAPT3743*4A*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	7541688
	CAPT3743*4A*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	7541695
	CAPT3743*4A*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	7541702
	CAPT3743*4A*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	7541709
	CAPT3743*4A*+EEP		23,600	16,900	14.0	12.2	725	7541611
	CAPT3743*4A*+MBVC1200**-1A*		23,600	16,900	14.5	12.2	775	7541612
	CHPF3636B6C*	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	7541621
	CHPF3636B6C*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541626
	CHPF3636B6C*	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	7541640
	CHPF3636B6C*	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	7541647
	CHPF3636B6C*	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	7541654
	CHPF3636B6C*	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	7541668
	CHPF3636B6C*	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	7541675
	CHPF3636B6C*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	7541689
	CHPF3636B6C*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	7541696
	CHPF3636B6C*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	7541703

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0251A* (cont.)	CHPF3636B6C*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	7541710
	CHPF3636B6C*+EEP		23,600	16,900	14.0	12.2	725	7541613
	CHPF3636B6C*+EEP+TXV		23,600	16,900	14.5	12.2	725	7541614
	CHPF3636B6C*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	7541615
	CHPF3636B6C*+TXV	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	7541622
	CHPF3636B6C*+TXV	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541627
	CHPF3636B6C*+TXV	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	7541641
	CHPF3636B6C*+TXV	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	7541648
	CHPF3636B6C*+TXV	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	7541655
	CHPF3636B6C*+TXV	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	7541669
	CHPF3636B6C*+TXV	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	7541676
	CHPF3636B6C*+TXV	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	7541690
	CHPF3636B6C*+TXV	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	7541697
	CHPF3636B6C*+TXV	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	7541704
	CHPF3636B6C*+TXV	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	7541711
	CHPF3642C6C*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541633
	CHPF3642C6C*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541661
	CHPF3642C6C*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541682
	CHPF3642C6C*+TXV	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541634
	CHPF3642C6C*+TXV	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541662
	CHPF3642C6C*+TXV	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541683
	CSCF3036N6D*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541628
	CSCF3036N6D*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541635
	CSCF3036N6D*	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	7541642
	CSCF3036N6D*	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	7541649
	CSCF3036N6D*	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	7541656
	CSCF3036N6D*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541663
	CSCF3036N6D*	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	7541670
	CSCF3036N6D*	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	7541677
	CSCF3036N6D*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541684
	CSCF3036N6D*+EEP		23,200	16,600	14.0	12.2	800	7541616
	CSCF3036N6D*+EEP+TXV		23,200	16,600	14.0	12.2	800	7541617
	CSCF3036N6D*+TXV	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	7541629
	CSCF3036N6D*+TXV	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	7541636
	CSCF3036N6D*+TXV	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	7541643
	CSCF3036N6D*+TXV	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	7541650
	CSCF3036N6D*+TXV	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	7541657
	CSCF3036N6D*+TXV	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	7541664
	CSCF3036N6D*+TXV	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	7541671
	CSCF3036N6D*+TXV	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	7541678
	CSCF3036N6D*+TXV	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	7541685
	CSCF3642N6D*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	7541691
	CSCF3642N6D*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	7541698
	CSCF3642N6D*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	7541705
	CSCF3642N6D*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	7541712
	CSCF3642N6D*+TXV	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	7541692
	CSCF3642N6D*+TXV	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	7541699
	CSCF3642N6D*+TXV	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	7541706
	CSCF3642N6D*+TXV	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	7541713
	DV24PTCB14A*		23,000	16,500	14.0	12.2	795	7541602
	DV30PTCC14A*		23,600	16,900	15.0	12.5	780	7541603

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0301A*	ARUF31B14A*		28,200	21,000	14.0	11.5	870	7989028
	ASPT36C14A*		29,000	21,400	14.5	12.0	1,010	7541714
	ASPT37B14A*		29,000	21,400	14.5	12.0	945	8245722
	ASPT37C14A*		29,000	21,400	15.0	12.5	1,045	8245723
	AWUF31XX16A*		28,000	20,800	14.0	11.5	950	7541716
	AWUF31XX16A*+TXV		28,400	21,000	14.5	11.5	1,000	7541717
	AWUF32XX16A*		28,000	20,800	14.0	11.5	950	7541718
	AWUF32XX16A*+TXV		28,400	21,000	14.5	11.5	1,000	7541719
	AWUF37XX16B*		28,400	21,000	14.0	11.5	1,000	7541720
	AWUF37XX16B*+TXV		28,600	21,200	14.5	11.5	1,000	7541721
	CA*F3137*6A*+EEP		28,800	21,400	14.0	11.5	1,000	8191634
	CA*F3137*6A*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	8191635
	CA*F3137*6A*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	950	8191636
	CA*F3137*6A*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	950	8191637
	CA*F3137*6A*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,000	8191638
	CA*F3137*6A*+TXV	D*80VC0604B*A*	28,400	21,000	14.5	11.5	1,000	8191639
	CA*F3137*6A*+TXV	D*96VC0403BNA*	28,600	21,200	14.5	11.5	1,000	8191640
	CA*F3137*6A*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,000	8191641
	CA*F3137*6A*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	950	8191642
	CA*F3137*6A*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,000	8191643
	CA*F3137*6A*+TXV	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	8191644
	CA*F3137*6A*+TXV	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	8191645
	CA*F3137*6A*+TXV	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	8191646
	CA*F3137*6A*+TXV	D*96VE0803BNA*	28,200	21,000	14.5	11.5	950	8191647
	CA*F3642*6D*	D*96VC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541790
	CA*F3642*6D*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541804
	CA*F3642*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7541722
	CA*F3642*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7541723
	CA*F3642*6D*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	980	7541724
	CA*F3642*6D*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	980	7541725
	CA*F3642*6D*+MBVC1600**-1A*		28,800	21,400	14.5	11.5	1,000	7541726
	CA*F3642*6D*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7541727
	CA*F3642*6D*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7541745
	CA*F3642*6D*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,060	7541750
	CA*F3642*6D*+TXV	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7541755
	CA*F3642*6D*+TXV	D*80VC0604B*A*	28,400	21,000	14.5	11.5	1,000	7541760
	CA*F3642*6D*+TXV	D*80VC0805C*A*	28,400	21,000	14.5	11.5	990	7541765
	CA*F3642*6D*+TXV	D*80VC1005C*A*	28,400	21,000	14.5	11.5	1,000	7541770
	CA*F3642*6D*+TXV	D*96VC0403BNA*	28,600	21,200	14.5	11.5	1,000	7541775
	CA*F3642*6D*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7541780
	CA*F3642*6D*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7541785
	CA*F3642*6D*+TXV	D*96VC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541791
	CA*F3642*6D*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7541799
	CA*F3642*6D*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541805
	CA*F3642*6D*+TXV	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	7541813
	CA*F3642*6D*+TXV	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	7541818
	CA*F3642*6D*+TXV	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	7541823
	CA*F3642*6D*+TXV	D*96VE0803BNA*	28,200	21,000	14.5	11.5	950	7541828
	CA*F3642*6D*+TXV	D*96VE1004CNA*	28,600	21,200	14.5	11.5	1,025	7541833
	CA*F3743*6D*	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7541792
	CA*F3743*6D*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541806
	CA*F3743*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7541728
	CA*F3743*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7541729

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0301A* (cont.)	CA*F3743*6D*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	12.0	1,050	7541746
	CA*F3743*6D*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	12.0	1,060	7541751
	CA*F3743*6D*+TXV	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7541756
	CA*F3743*6D*+TXV	D*80VC0604B*A*	28,600	21,200	14.5	11.5	1,000	7541761
	CA*F3743*6D*+TXV	D*80VC0805C*A*	28,600	21,200	14.5	11.5	990	7541766
	CA*F3743*6D*+TXV	D*80VC1005C*A*	28,600	21,200	14.5	11.5	1,000	7541771
	CA*F3743*6D*+TXV	D*96VC0403BNA*	28,800	21,400	14.5	11.5	1,000	7541776
	CA*F3743*6D*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7541781
	CA*F3743*6D*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7541786
	CA*F3743*6D*+TXV	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7541793
	CA*F3743*6D*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7541800
	CA*F3743*6D*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541807
	CA*F3743*6D*+TXV	D*96VE0302BNA*	28,400	21,000	14.5	11.5	940	7541814
	CA*F3743*6D*+TXV	D*96VE0402BNA*	28,400	21,000	14.5	11.5	925	7541819
	CA*F3743*6D*+TXV	D*96VE0603BNA*	28,400	21,000	14.5	11.5	965	7541824
	CA*F3743*6D*+TXV	D*96VE0803BNA*	28,400	21,000	14.5	11.5	950	7541829
	CA*F3743*6D*+TXV	D*96VE1004CNA*	28,800	21,400	14.5	11.5	1,025	7541834
	CAPT3743*4A*	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7541747
	CAPT3743*4A*	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,060	7541752
	CAPT3743*4A*	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7541757
	CAPT3743*4A*	D*80VC0604B*A*	28,400	21,000	14.5	11.5	1,000	7541762
	CAPT3743*4A*	D*80VC0805C*A*	28,400	21,000	14.5	11.5	990	7541767
	CAPT3743*4A*	D*80VC1005C*A*	28,400	21,000	14.5	11.5	1,000	7541772
	CAPT3743*4A*	D*96VC0403BNA*	28,600	21,200	14.5	11.5	1,000	7541777
	CAPT3743*4A*	D*96VC0603BNA*	28,600	21,200	14.5	11.5	1,040	7541782
	CAPT3743*4A*	D*96VC0803BNA*	28,400	21,000	14.5	11.5	975	7541787
	CAPT3743*4A*	D*96VC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541794
	CAPT3743*4A*	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7541801
	CAPT3743*4A*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541808
	CAPT3743*4A*	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	7541815
	CAPT3743*4A*	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	7541820
	CAPT3743*4A*	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	7541825
	CAPT3743*4A*	D*96VE0803BNA*	28,200	21,000	14.5	11.5	950	7541830
	CAPT3743*4A*	D*96VE1004CNA*	28,600	21,200	14.5	11.5	1,025	7541835
	CAPT3743*4A*+EEP		28,800	21,400	14.5	11.5	1,000	7541730
	CAPT3743*4A*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	980	7541731
	CAPT3743*4A*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7541732
	CHPF3636B6C*+TXV	D*96VC0403BNA*	28,800	21,400	14.5	11.5	1,000	7541778
	CHPF3636B6C*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7541783
	CHPF3636B6C*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7541788
	CHPF3636B6C*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7541802
	CHPF3642C6C*	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7541795
	CHPF3642C6C*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541809
	CHPF3642C6C*+EEP		28,800	21,400	14.0	11.5	1,000	7541733
	CHPF3642C6C*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7541734
	CHPF3642C6C*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	1,000	7541735
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7541736
	CHPF3642C6C*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7541737
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7541738
	CHPF3642C6C*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7541748
	CHPF3642C6C*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,000	7541753
	CHPF3642C6C*+TXV	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7541758
	CHPF3642C6C*+TXV	D*80VC0604B*A*	28,600	21,200	14.5	11.5	1,000	7541763

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0301A* (cont.)	CHPF3642C6C*+TXV	D*80VC0805C*A*	28,600	21,200	14.5	11.5	990	7541768
	CHPF3642C6C*+TXV	D*80VC1005C*A*	28,600	21,200	14.5	11.5	1,000	7541773
	CHPF3642C6C*+TXV	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7541796
	CHPF3642C6C*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541810
	CHPF3642C6C*+TXV	D*96VE0302BNA*	28,400	21,000	14.5	11.5	940	7541816
	CHPF3642C6C*+TXV	D*96VE0402BNA*	28,400	21,000	14.5	11.5	925	7541821
	CHPF3642C6C*+TXV	D*96VE0603BNA*	28,400	21,000	14.5	11.5	965	7541826
	CHPF3642C6C*+TXV	D*96VE0803BNA*	28,400	21,000	14.5	11.5	950	7541831
	CHPF3642C6C*+TXV	D*96VE1004CNA*	28,800	21,400	14.5	11.5	1,025	7541836
	CHPF3743C6B*+EEP		28,800	21,400	14.0	11.5	1,000	7541739
	CHPF3743C6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7541740
	CHPF3743D6B*+EEP		28,800	21,400	14.0	11.5	1,000	7541741
	CHPF3743D6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7541742
	CSCF3642N6D*	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7541797
	CSCF3642N6D*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541811
	CSCF3642N6D*+EEP		28,600	21,200	14.0	11.5	1,000	7541743
	CSCF3642N6D*+EEP+TXV		28,600	21,200	14.0	11.5	1,000	7541744
	CSCF3642N6D*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7541749
	CSCF3642N6D*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,060	7541754
	CSCF3642N6D*+TXV	D*80HE1005C*A*	28,600	21,200	14.5	11.5	1,070	7541759
	CSCF3642N6D*+TXV	D*80VC0604B*A*	28,600	21,200	14.5	11.5	1,000	7541764
	CSCF3642N6D*+TXV	D*80VC0805C*A*	28,600	21,200	14.5	11.5	990	7541769
	CSCF3642N6D*+TXV	D*80VC1005C*A*	28,600	21,200	14.5	11.5	1,000	7541774
	CSCF3642N6D*+TXV	D*96VC0403BNA*	28,800	21,400	14.5	11.5	1,000	7541779
	CSCF3642N6D*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7541784
	CSCF3642N6D*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7541789
	CSCF3642N6D*+TXV	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7541798
	CSCF3642N6D*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7541803
	CSCF3642N6D*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7541812
	CSCF3642N6D*+TXV	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	7541817
	CSCF3642N6D*+TXV	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	7541822
	CSCF3642N6D*+TXV	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	7541827
	CSCF3642N6D*+TXV	D*96VE0803BNA*	28,400	21,000	14.5	11.5	950	7541832
	CSCF3642N6D*+TXV	D*96VE1004CNA*	28,400	21,000	14.5	11.5	1,025	7541837
	DV36PTCC14A*		29,000	21,400	14.5	12.0	1,085	7541715
DX14SA 0311A*	ARUF31B14A*		28,200	22,200	14.0	12.2	870	7989029
	ARUF37C14A*		28,400	22,400	14.0	12.2	1,050	7989030
	ASPT36C14A*		28,000	22,000	15.0	12.5	1,010	7541838
	ASPT37B14A*		29,000	22,800	14.5	12.2	945	8245724
	ASPT37C14A*		29,000	22,800	15.0	12.5	1,045	8245725
	AWUF31XX16A*		28,000	22,000	14.0	12.2	1,000	7541840
	AWUF31XX16A*+TXV		28,000	22,000	14.5	12.2	1,000	7541841
	AWUF32XX16A*		28,000	22,000	14.0	12.2	950	7541842
	AWUF32XX16A*+TXV		28,000	22,000	14.5	12.2	950	7541843
	AWUF37XX16B*		28,000	22,000	14.0	12.2	950	7541844
	AWUF37XX16B*+TXV		28,000	22,000	14.5	12.2	950	7541845
	CA*F3137*6A*	D*80HE0603B*A*	28,400	22,400	14.5	12.2	1,050	7541859
	CA*F3137*6A*	D*80VC0604B*A*	28,400	22,400	15.0	12.5	1,000	7541874
	CA*F3137*6A*	D*96VC0403BNA*	28,600	22,600	15.0	12.5	1,000	7541889
	CA*F3137*6A*	D*96VC0603BNA*	28,600	22,600	15.0	12.5	1,040	7541894
	CA*F3137*6A*	D*96VC0803BNA*	28,400	22,400	15.0	12.5	975	7541899
	CA*F3137*6A*	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7541913
	CA*F3137*6A*	D*96VE0302BNA*	28,200	22,200	15.0	12.5	940	7541927

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0311A* (cont.)	CA*F3137*6A*	D*96VE0402BNA*	28,200	22,200	15.0	12.5	925	7541932
	CA*F3137*6A*	D*96VE0603BNA*	28,200	22,200	15.0	12.5	965	7541937
	CA*F3137*6A*	D*96VE0803BNA*	28,200	22,200	15.0	12.5	950	7541942
	CA*F3137*6A*+EEP		28,600	22,600	14.0	12.2	1,000	7541846
	CA*F3137*6A*+EEP+TXV		28,600	22,600	14.0	12.2	1,000	7541847
	CA*F3743*6D*	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7541906
	CA*F3743*6D*	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7541920
	CA*F3743*6D*+TXV	D*80HE0603B*A*	28,400	22,400	15.0	12.5	1,050	7541860
	CA*F3743*6D*+TXV	D*80HE0805C*A*	28,600	22,600	15.0	12.5	1,000	7541865
	CA*F3743*6D*+TXV	D*80HE1005C*A*	28,400	22,400	15.0	12.5	1,000	7541870
	CA*F3743*6D*+TXV	D*80VC0604B*A*	28,600	22,600	15.0	12.5	1,000	7541875
	CA*F3743*6D*+TXV	D*80VC0805C*A*	28,600	22,600	15.0	12.5	990	7541880
	CA*F3743*6D*+TXV	D*80VC1005C*A*	28,600	22,600	15.0	12.5	1,000	7541885
	CA*F3743*6D*+TXV	D*96VC0403BNA*	28,800	22,600	15.0	12.5	1,000	7541890
	CA*F3743*6D*+TXV	D*96VC0603BNA*	28,600	22,600	15.0	12.5	1,040	7541895
	CA*F3743*6D*+TXV	D*96VC0803BNA*	28,400	22,400	15.0	12.5	975	7541900
	CA*F3743*6D*+TXV	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7541907
	CA*F3743*6D*+TXV	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7541914
	CA*F3743*6D*+TXV	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7541921
	CA*F3743*6D*+TXV	D*96VE0302BNA*	28,400	22,400	15.0	12.5	940	7541928
	CA*F3743*6D*+TXV	D*96VE0402BNA*	28,400	22,400	15.0	12.5	925	7541933
	CA*F3743*6D*+TXV	D*96VE0603BNA*	28,400	22,400	15.0	12.5	965	7541938
	CA*F3743*6D*+TXV	D*96VE0803BNA*	28,400	22,400	15.0	12.5	950	7541943
	CA*F3743*6D*+TXV	D*96VE1004CNA*	28,800	22,600	15.0	12.5	1,025	7541948
	CAPT3743*4A*	D*80HE0603B*A*	28,400	22,400	14.5	12.2	1,050	7541861
	CAPT3743*4A*	D*80HE0805C*A*	28,400	22,400	14.5	12.2	1,000	7541866
	CAPT3743*4A*	D*80VC0604B*A*	28,400	22,400	14.5	12.2	1,000	7541876
	CAPT3743*4A*	D*80VC1005C*A*	28,400	22,400	14.5	12.2	1,000	7541886
	CAPT3743*4A*	D*96VC0403BNA*	28,400	22,400	14.5	12.2	1,000	7541891
	CAPT3743*4A*	D*96VC0603BNA*	28,400	22,400	14.5	12.2	1,040	7541896
	CAPT3743*4A*	D*96VC0803BNA*	27,800	21,800	15.0	12.5	975	7541901
	CAPT3743*4A*	D*96VC0804CNA*	28,400	22,400	14.5	12.2	1,000	7541908
	CAPT3743*4A*	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7541915
	CAPT3743*4A*	D*97MC0804CNA*	28,400	22,400	14.5	12.2	1,000	7541922
	CAPT3743*4A*	D*96VE0302BNA*	28,200	22,200	14.5	12.2	940	7541929
	CAPT3743*4A*	D*96VE0402BNA*	28,200	22,200	14.5	12.2	925	7541934
	CAPT3743*4A*	D*96VE0803BNA*	28,200	22,200	14.5	12.2	950	7541944
	CAPT3743*4A*	D*96VE1004CNA*	28,600	22,600	14.5	12.2	1,025	7541949
	CAPT3743*4A*+EEP		28,000	22,000	14.5	12.2	1,000	7541848
	CAPT3743*4A*+MBVC1200**-1A*		28,600	22,600	15.0	12.5	1,000	7541849
	CAPT3743*4A*+MBVC1600**-1A*		28,600	22,600	15.0	12.5	1,000	7541850
	CHPF3636B6C*+TXV	D*96VC0403BNA*	28,000	22,000	14.5	12.5	1,000	7541892
	CHPF3636B6C*+TXV	D*96VC0603BNA*	28,000	22,000	14.5	12.2	1,040	7541897
	CHPF3636B6C*+TXV	D*96VC0803BNA*	28,000	22,000	14.5	12.2	975	7541902
	CHPF3636B6C*+TXV	D*97MC0603BNA*	28,000	22,000	14.5	12.2	1,040	7541916
	CHPF3642C6C*+EEP		28,600	22,600	14.0	12.2	1,000	7541851
	CHPF3642C6C*+EEP+TXV		28,000	22,000	14.5	12.2	1,000	7541852
	CHPF3642C6C*+MBVC1200**-1A*		28,000	22,000	14.5	12.2	1,000	7541853
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,000	22,000	14.5	12.2	1,000	7541854
	CHPF3642C6C*+MBVC1600**-1A*		28,000	22,000	14.5	12.2	1,000	7541855
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,400	22,400	15.0	12.5	1,000	7541856
	CHPF3642C6C*+TXV	D*80HE0603B*A*	28,000	22,000	14.5	12.2	1,050	7541862
	CHPF3642C6C*+TXV	D*80VC0604B*A*	28,000	22,000	14.5	12.2	1,000	7541877

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0311A* (cont.)	CHPF3642C6C*+TXV	D*96VE0302BNA*	28,400	22,400	14.5	12.2	940	7541930
	CHPF3642C6C*+TXV	D*96VE0402BNA*	28,400	22,400	15.0	12.5	925	7541935
	CHPF3642C6C*+TXV	D*96VE0603BNA*	28,400	22,400	14.5	12.2	965	7541940
	CHPF3642C6C*+TXV	D*96VE0803BNA*	28,400	22,400	14.5	12.2	950	7541945
	CHPF3642D6C*	D*96VC0804CNA*	28,600	22,600	14.5	12.2	1,000	7541909
	CHPF3642D6C*	D*97MC0804CNA*	28,600	22,600	14.5	12.2	1,000	7541923
	CHPF3642D6C*+TXV	D*80HE0805C*A*	28,000	22,000	15.0	12.5	1,000	7541867
	CHPF3642D6C*+TXV	D*80HE1005C*A*	28,600	22,600	15.0	12.5	1,000	7541872
	CHPF3642D6C*+TXV	D*80VC0805C*A*	28,600	22,600	15.0	12.5	990	7541882
	CHPF3642D6C*+TXV	D*80VC1005C*A*	28,600	22,600	14.5	12.2	1,000	7541887
	CHPF3642D6C*+TXV	D*96VC0804CNA*	28,600	22,600	14.5	12.2	1,000	7541910
	CHPF3642D6C*+TXV	D*97MC0804CNA*	28,600	22,600	14.5	12.2	1,000	7541924
	CHPF3642D6C*+TXV	D*96VE1004CNA*	28,800	22,600	15.0	12.5	1,025	7541950
	CSCF3642N6D*	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7541911
	CSCF3642N6D*	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7541925
	CSCF3642N6D*+EEP		28,400	22,400	14.0	12.2	1,000	7541857
	CSCF3642N6D*+EEP+TXV		28,400	22,400	14.5	12.2	1,000	7541858
	CSCF3642N6D*+TXV	D*80HE0603B*A*	28,600	22,600	15.0	12.5	1,050	7541863
	CSCF3642N6D*+TXV	D*80HE0805C*A*	28,400	22,400	15.0	12.5	1,000	7541868
	CSCF3642N6D*+TXV	D*80HE1005C*A*	28,400	22,400	15.0	12.5	1,000	7541873
	CSCF3642N6D*+TXV	D*80VC0604B*A*	28,600	22,600	15.0	12.5	1,000	7541878
	CSCF3642N6D*+TXV	D*80VC0805C*A*	28,400	22,400	15.0	12.5	990	7541883
	CSCF3642N6D*+TXV	D*80VC1005C*A*	28,600	22,600	15.0	12.5	1,000	7541888
	CSCF3642N6D*+TXV	D*96VC0403BNA*	28,600	22,600	15.0	12.5	1,000	7541893
	CSCF3642N6D*+TXV	D*96VC0603BNA*	28,400	22,400	15.0	12.5	1,040	7541898
	CSCF3642N6D*+TXV	D*96VC0803BNA*	28,400	22,400	15.0	12.5	975	7541903
	CSCF3642N6D*+TXV	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7541912
	CSCF3642N6D*+TXV	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7541917
	CSCF3642N6D*+TXV	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7541926
	CSCF3642N6D*+TXV	D*96VE0302BNA*	28,400	22,400	14.5	12.2	940	7541931
	CSCF3642N6D*+TXV	D*96VE0402BNA*	28,400	22,400	14.5	12.2	925	7541936
	CSCF3642N6D*+TXV	D*96VE0603BNA*	28,400	22,400	14.5	12.2	965	7541941
	CSCF3642N6D*+TXV	D*96VE0803BNA*	28,400	22,400	14.5	12.2	950	7541946
	CSCF3642N6D*+TXV	D*96VE1004CNA*	28,400	22,400	14.5	12.2	1,025	7541951
	DV36PTCC14A*		28,000	22,000	15.0	12.5	1,000	7541839
DX14SA 0361A*	ARUF37C14A*		33,600	25,000	14.0	11.5	1,050	7989031
	ARUF37D14A*		33,600	25,000	14.0	11.5	1,240	8171753
	ASPT36C14A*		34,200	25,400	14.5	11.5	1,210	7541952
	ASPT37C14A*		34,200	25,400	14.5	12.0	1,120	8245726
	ASPT42D14A*		34,800	25,800	14.5	12.0	1,280	7541953
	ASPT47C14A*		34,200	25,400	14.5	12.0	1,120	8245727
	ASPT47D14A*		34,600	25,600	15.0	12.5	1,205	8245728
	AWUF37XX16B*+TXV		33,000	24,400	14.5	11.5	1,050	7541956
	CA*F3137*6A*+EEP		34,000	25,200	14.0	11.5	1,200	8191648
	CA*F3137*6A*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	8191649
	CA*F3137*6A*+TXV	D*80HE0603B*A*	33,400	24,800	14.0	11.5	1,100	8191650
	CA*F3137*6A*+TXV	D*80VC0604B*A*	33,600	25,000	14.0	11.5	1,240	8191651
	CA*F3137*6A*+TXV	D*96VC0403BNA*	34,200	25,400	14.0	11.5	1,200	8191652
	CA*F3137*6A*+TXV	D*96VC0603BNA*	34,400	25,400	14.0	11.5	1,200	8191653
	CA*F3137*6A*+TXV	D*96VC0803BNA*	34,400	25,400	14.0	11.5	1,150	8191654
	CA*F3137*6A*+TXV	D*97MC0603BNA*	34,400	25,400	14.0	11.5	1,200	8191655
	CA*F3137*6A*+TXV	D*97MC0803BNA*	34,400	25,400	14.0	11.5	1,150	8191656
	CA*F3137*6A*+TXV	D*96VE0603BNA*	34,200	25,400	14.0	11.5	1,100	8191657

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0361A* (cont.)	CA*F3137*6A*+TXV	D*96VE0803BNA*	34,200	25,400	14.0	11.5	1,100	8191658
	CA*F3642*6D*+EEP		34,000	25,200	14.0	11.5	1,200	7541957
	CA*F3642*6D*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	7541958
	CA*F3642*6D*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,200	7541959
	CA*F3642*6D*+MBVC2000**-1A*		34,000	25,200	14.5	12.0	1,200	7541960
	CA*F3743*6D*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7541983
	CA*F3743*6D*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7541985
	CA*F3743*6D*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7541988
	CA*F3743*6D*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7541990
	CA*F3743*6D*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7541995
	CA*F3743*6D*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7541997
	CA*F3743*6D*	D*96VC1205DNA*	34,600	25,600	14.5	11.5	1,200	7541999
	CA*F3743*6D*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542003
	CA*F3743*6D*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542005
	CA*F3743*6D*	D*97MC1205DNA*	34,600	25,600	14.5	11.5	1,200	7542007
	CA*F3743*6D*	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7542012
	CA*F3743*6D*	D*96VE1205DNA*	34,000	25,200	14.5	11.5	1,075	7542017
	CA*F3743*6D*+EEP		34,600	25,600	14.0	11.5	1,200	7541961
	CA*F3743*6D*+EEP+TXV		34,600	25,600	14.5	11.5	1,200	7541962
	CA*F3743*6D*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7541963
	CA*F3743*6D*+MBVC2000**-1A*		35,000	26,000	14.5	11.5	1,200	7541964
	CA*F3743*6D*+TXV	D*80HE0603B*A*	33,400	24,800	14.5	11.5	1,250	7541980
	CA*F3743*6D*+TXV	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7541984
	CA*F3743*6D*+TXV	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7541986
	CA*F3743*6D*+TXV	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7541987
	CA*F3743*6D*+TXV	D*80VC0805C*A*	33,600	25,000	14.5	12.0	1,200	7541989
	CA*F3743*6D*+TXV	D*80VC1005C*A*	33,400	24,800	14.5	12.0	1,200	7541991
	CA*F3743*6D*+TXV	D*96VC0403BNA*	34,200	25,400	14.5	11.5	1,200	7541992
	CA*F3743*6D*+TXV	D*96VC0603BNA*	34,400	25,400	14.5	11.5	1,250	7541993
	CA*F3743*6D*+TXV	D*96VC0803BNA*	34,400	25,400	14.5	11.5	1,250	7541994
	CA*F3743*6D*+TXV	D*96VC0804CNA*	34,600	25,600	14.5	12.0	1,190	7541996
	CA*F3743*6D*+TXV	D*96VC1005CNA*	34,600	25,600	14.5	12.0	1,175	7541998
	CA*F3743*6D*+TXV	D*96VC1205DNA*	34,600	25,600	14.5	12.0	1,200	7542000
	CA*F3743*6D*+TXV	D*97MC0603BNA*	34,400	25,400	14.5	11.5	1,250	7542001
	CA*F3743*6D*+TXV	D*97MC0803BNA*	34,400	25,400	14.5	11.5	1,250	7542002
	CA*F3743*6D*+TXV	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542004
	CA*F3743*6D*+TXV	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542006
	CA*F3743*6D*+TXV	D*97MC1205DNA*	34,600	25,600	14.5	12.0	1,200	7542008
	CA*F3743*6D*+TXV	D*96VE0603BNA*	34,200	25,400	14.5	11.5	1,150	7542009
	CA*F3743*6D*+TXV	D*96VE0803BNA*	34,200	25,400	14.5	11.5	1,150	7542011
	CA*F3743*6D*+TXV	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7542013
	CA*F3743*6D*+TXV	D*96VE1205DNA*	34,000	25,200	14.5	12.0	1,075	7542018
	CA*F4860*6D*+EEP		34,800	25,800	14.0	11.5	1,200	7541968
	CA*F4860*6D*+EEP+TXV		34,800	25,800	14.0	11.5	1,200	7541969
	CAPT3743*4A*	D*96VE0603BNA*	34,200	25,400	14.0	11.5	1,150	7542010
	CAPT3743*4A*	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7542014
	CAPT3743*4A*	D*96VE1205DNA*	34,000	25,200	14.5	11.5	1,075	7542019
	CAPT3743*4A*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7543753
	CAPT3743*4A*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7543764
	CAPT3743*4A*	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7543774
	CAPT3743*4A*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7543781
	CAPT3743*4A*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7543792
	CAPT3743*4A*	D*96VC0403BNA*	34,000	25,200	14.5	11.5	1,200	7543802

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0361A* (cont.)	CAPT3743*4A*	D*96VC0603BNA*	34,200	25,400	14.5	11.5	1,250	7543808
	CAPT3743*4A*	D*96VC0803BNA*	34,200	25,400	14.5	11.5	1,250	7543815
	CAPT3743*4A*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543821
	CAPT3743*4A*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543832
	CAPT3743*4A*	D*96VC1205DNA*	34,400	25,400	14.5	11.5	1,200	7543843
	CAPT3743*4A*	D*97MC0603BNA*	34,200	25,400	14.5	11.5	1,250	7543852
	CAPT3743*4A*	D*97MC0803BNA*	34,200	25,400	14.5	11.5	1,250	7543858
	CAPT3743*4A*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543865
	CAPT3743*4A*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543876
	CAPT3743*4A*	D*97MC1205DNA*	34,400	25,400	14.5	11.5	1,200	7543886
	CAPT3743*4A*	D*96VE0803BNA*	34,200	25,400	14.0	11.5	1,150	7543899
	CAPT3743*4A*+EEP		34,600	25,600	14.5	11.5	1,200	7541965
	CAPT3743*4A*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,205	7541966
	CAPT3743*4A*+MBVC2000**-1A*		34,000	25,200	14.5	11.5	1,205	7541967
	CHPF3642C6C*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7543755
	CHPF3642C6C*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7543766
	CHPF3642C6C*+EEP		34,600	25,600	14.0	11.5	1,200	7541970
	CHPF3642C6C*+EEP+TXV		34,600	25,600	14.0	11.5	1,200	7541971
	CHPF3642C6C*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7541972
	CHPF3642C6C*+TXV	D*80HE0603B*A*	33,400	24,800	14.5	11.5	1,250	7541981
	CHPF3642C6C*+TXV	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7543757
	CHPF3642C6C*+TXV	D*80HE1005C*A*	34,000	25,200	14.5	12.0	1,230	7543767
	CHPF3642C6C*+TXV	D*96VE0603BNA*	34,200	25,400	14.5	11.5	1,150	7543897
	CHPF3642C6C*+TXV	D*96VE0803BNA*	34,200	25,400	14.5	11.5	1,150	7543901
	CHPF3743C6B*	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7542015
	CHPF3743C6B*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7543783
	CHPF3743C6B*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7543794
	CHPF3743C6B*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543823
	CHPF3743C6B*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543834
	CHPF3743C6B*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543867
	CHPF3743C6B*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543877
	CHPF3743C6B*+EEP		34,000	25,200	14.0	11.5	1,150	7541973
	CHPF3743C6B*+EEP+TXV		34,000	25,200	14.5	11.5	1,150	7541974
	CHPF3743C6B*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7541975
	CHPF3743C6B*+TXV	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7542016
	CHPF3743C6B*+TXV	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7543776
	CHPF3743C6B*+TXV	D*80VC0805C*A*	33,600	25,000	14.5	12.0	1,200	7543785
	CHPF3743C6B*+TXV	D*80VC1005C*A*	33,400	24,800	14.5	12.0	1,200	7543795
	CHPF3743C6B*+TXV	D*96VC0403BNA*	34,200	25,400	14.5	11.5	1,200	7543804
	CHPF3743C6B*+TXV	D*96VC0603BNA*	34,400	25,400	14.5	11.5	1,250	7543810
	CHPF3743C6B*+TXV	D*96VC0803BNA*	34,400	25,400	14.5	11.5	1,250	7543817
	CHPF3743C6B*+TXV	D*96VC0804CNA*	34,600	25,600	14.5	12.0	1,190	7543825
	CHPF3743C6B*+TXV	D*96VC1005CNA*	34,600	25,600	14.5	12.0	1,175	7543836
	CHPF3743C6B*+TXV	D*97MC0603BNA*	34,400	25,400	14.5	11.5	1,250	7543854
	CHPF3743C6B*+TXV	D*97MC0803BNA*	34,400	25,400	14.5	11.5	1,250	7543860
	CHPF3743C6B*+TXV	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543869
	CHPF3743C6B*+TXV	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543879
	CHPF3743D6B*	D*96VE1205DNA*	34,000	25,200	14.5	11.5	1,075	7542020
	CHPF3743D6B*	D*96VC1205DNA*	34,600	25,600	14.5	11.5	1,200	7543845
	CHPF3743D6B*	D*97MC1205DNA*	34,600	25,600	14.5	11.5	1,200	7543888
	CHPF3743D6B*+EEP		34,600	25,600	14.5	11.5	1,150	7541976
	CHPF3743D6B*+EEP+TXV		34,600	25,600	14.5	12.0	1,150	7541977
	CHPF3743D6B*+TXV	D*96VC1205DNA*	34,600	25,600	14.5	12.0	1,200	7543846
	CHPF3743D6B*+TXV	D*97MC1205DNA*	34,600	25,600	14.5	12.0	1,200	7543890

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0361A* (cont.)	CHPF3743D6B*+TXV	D*96VE1205DNA*	34,000	25,200	14.5	12.0	1,075	7543909
	CSCF4860N6D*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7543759
	CSCF4860N6D*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7543769
	CSCF4860N6D*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7543787
	CSCF4860N6D*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7543797
	CSCF4860N6D*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543827
	CSCF4860N6D*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543838
	CSCF4860N6D*	D*96VC1205DNA*	34,600	25,600	14.5	11.5	1,200	7543848
	CSCF4860N6D*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543870
	CSCF4860N6D*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543881
	CSCF4860N6D*	D*97MC1205DNA*	34,600	25,600	14.5	11.5	1,200	7543892
	CSCF4860N6D*+EEP		34,600	25,600	14.0	11.5	1,200	7541978
	CSCF4860N6D*+EEP+TXV		34,600	25,600	14.0	11.5	1,200	7541979
	CSCF4860N6D*+TXV	D*80HE0603B*A*	33,400	24,800	14.5	11.5	1,250	7541982
	CSCF4860N6D*+TXV	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7543761
	CSCF4860N6D*+TXV	D*80HE1005C*A*	34,000	25,200	14.5	12.0	1,230	7543771
	CSCF4860N6D*+TXV	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7543778
	CSCF4860N6D*+TXV	D*80VC0805C*A*	33,600	25,000	14.5	12.0	1,200	7543788
	CSCF4860N6D*+TXV	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7543799
	CSCF4860N6D*+TXV	D*96VC0403BNA*	34,200	25,400	14.5	11.5	1,200	7543806
	CSCF4860N6D*+TXV	D*96VC0603BNA*	34,400	25,400	14.5	11.5	1,250	7543812
	CSCF4860N6D*+TXV	D*96VC0803BNA*	34,400	25,400	14.5	11.5	1,250	7543818
	CSCF4860N6D*+TXV	D*96VC0804CNA*	34,600	25,600	14.5	12.0	1,190	7543829
	CSCF4860N6D*+TXV	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543840
	CSCF4860N6D*+TXV	D*96VC1205DNA*	34,600	25,600	14.5	12.0	1,200	7543850
	CSCF4860N6D*+TXV	D*97MC0603BNA*	34,400	25,400	14.5	11.5	1,250	7543855
	CSCF4860N6D*+TXV	D*97MC0803BNA*	34,400	25,400	14.5	11.5	1,250	7543862
	CSCF4860N6D*+TXV	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7543872
	CSCF4860N6D*+TXV	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7543883
	CSCF4860N6D*+TXV	D*97MC1205DNA*	34,600	25,600	14.5	12.0	1,200	7543894
	DV36PTCC14A*		34,200	25,400	14.5	11.5	1,100	7541954
	DV42PTCD14A*		34,800	25,800	14.5	12.0	1,120	7541955
DX14SA 0371A*	ARUF37C14A*+TXV		33,400	25,200	14.0	12.2	1,050	7989058
	ARUF37D14A*		34,200	25,800	14.0	12.2	1,240	8171754
	ARUF49C14A*		34,000	25,800	14.0	12.2	1,220	7989032
	ASPT36C14A*		34,200	25,800	14.5	12.5	1,210	7542021
	ASPT37C14A*		34,200	25,800	14.5	12.2	1,120	8245729
	ASPT42D14A*		34,200	25,800	15.0	12.5	1,280	7542022
	ASPT47C14A*		34,200	25,800	14.5	12.2	1,120	8245730
	ASPT47D14A*		34,600	26,200	15.0	12.5	1,205	8245731
	AWUF37XX16B*+TXV		33,000	25,000	14.5	12.2	355	7542025
	CA*F3137*6A*	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7542049
	CA*F3137*6A*	D*80VC0604B*A*	33,600	25,400	15.0	12.5	1,220	7542068
	CA*F3137*6A*	D*96VC0403BNA*	34,000	25,800	15.0	12.5	1,200	7542091
	CA*F3137*6A*	D*96VC0603BNA*	34,000	25,800	15.0	12.5	1,250	7542096
	CA*F3137*6A*	D*96VC0803BNA*	34,000	25,800	15.0	12.5	1,250	7542101
	CA*F3137*6A*	D*97MC0603BNA*	34,000	25,800	15.0	12.5	1,250	7542133
	CA*F3137*6A*	D*97MC0803BNA*	34,000	25,800	15.0	12.5	1,250	7542138
	CA*F3137*6A*+EEP		34,000	25,800	14.0	12.2	1,200	7542026
	CA*F3137*6A*+EEP+TXV		34,000	25,800	14.0	12.2	1,200	7542027
	CA*F3743*6D*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7542053
	CA*F3743*6D*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7542061
	CA*F3743*6D*	D*80VC0805C*A*	33,600	25,400	14.5	12.2	1,200	7542075
	CA*F3743*6D*	D*80VC1005C*A*	33,400	25,200	14.5	12.2	1,200	7542084

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0371A* (cont.)	CA*F3743*6D*	D*96VC0804CNA*	34,600	26,200	14.5	12.2	1,190	7542108
	CA*F3743*6D*	D*96VC1005CNA*	34,600	26,200	14.5	12.2	1,175	7542117
	CA*F3743*6D*	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542126
	CA*F3743*6D*	D*97MC0804CNA*	34,600	26,200	14.5	12.2	1,190	7542145
	CA*F3743*6D*	D*97MC1005CNA*	34,600	26,200	14.5	12.2	1,175	7542154
	CA*F3743*6D*	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542163
	CA*F3743*6D*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7542172
	CA*F3743*6D*	D*96VE1205DNA*	34,400	26,000	15.0	12.5	1,075	7542181
	CA*F3743*6D*+EEP		34,000	25,800	14.0	12.2	1,200	7542028
	CA*F3743*6D*+EEP+TXV		34,000	25,800	14.5	12.2	1,200	7542029
	CA*F3743*6D*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7542030
	CA*F3743*6D*+MBVC1600**-1A*+TXV		34,600	26,200	14.5	12.2	1,200	7542031
	CA*F3743*6D*+MBVC2000**-1A*		34,600	26,200	15.0	12.5	1,200	7542032
	CA*F3743*6D*+MBVC2000**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7542033
	CA*F3743*6D*+TXV	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7542050
	CA*F3743*6D*+TXV	D*80HE0805C*A*	33,600	25,400	15.0	12.5	1,210	7542054
	CA*F3743*6D*+TXV	D*80HE1005C*A*	34,000	25,800	15.0	12.5	1,200	7542062
	CA*F3743*6D*+TXV	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7542069
	CA*F3743*6D*+TXV	D*80VC0805C*A*	33,600	25,400	15.0	12.5	1,200	7542076
	CA*F3743*6D*+TXV	D*80VC1005C*A*	33,400	25,200	15.0	12.5	1,200	7542085
	CA*F3743*6D*+TXV	D*96VC0403BNA*	34,000	25,800	14.5	12.2	1,200	7542092
	CA*F3743*6D*+TXV	D*96VC0603BNA*	34,400	26,000	14.5	12.2	1,250	7542097
	CA*F3743*6D*+TXV	D*96VC0803BNA*	34,400	26,000	14.5	12.2	1,250	7542102
	CA*F3743*6D*+TXV	D*96VC0804CNA*	34,600	26,200	15.0	12.5	1,190	7542109
	CA*F3743*6D*+TXV	D*96VC1005CNA*	34,600	26,200	15.0	12.5	1,175	7542118
	CA*F3743*6D*+TXV	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542127
	CA*F3743*6D*+TXV	D*97MC0603BNA*	34,200	25,800	14.5	12.2	1,250	7542134
	CA*F3743*6D*+TXV	D*97MC0803BNA*	34,400	26,000	14.5	12.2	1,250	7542139
	CA*F3743*6D*+TXV	D*97MC0804CNA*	34,600	26,200	15.0	12.5	1,190	7542146
	CA*F3743*6D*+TXV	D*97MC1005CNA*	34,600	26,200	15.0	12.5	1,175	7542155
	CA*F3743*6D*+TXV	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542164
	CA*F3743*6D*+TXV	D*96VE1004CNA*	34,600	26,200	15.0	12.5	1,250	7542173
	CA*F3743*6D*+TXV	D*96VE1205DNA*	34,400	26,000	15.0	12.5	1,075	7542182
	CAPT3743*4A*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7542055
	CAPT3743*4A*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7542063
	CAPT3743*4A*	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7542070
	CAPT3743*4A*	D*80VC0805C*A*	33,600	25,400	15.0	12.2	1,200	7542077
	CAPT3743*4A*	D*80VC1005C*A*	33,400	25,200	15.0	12.2	1,200	7542086
	CAPT3743*4A*	D*96VC0403BNA*	34,000	25,800	14.5	12.2	1,200	7542093
	CAPT3743*4A*	D*96VC0603BNA*	34,200	25,800	14.5	12.2	1,250	7542098
	CAPT3743*4A*	D*96VC0803BNA*	34,200	25,800	14.5	12.2	1,250	7542103
	CAPT3743*4A*	D*96VC0804CNA*	34,600	26,200	15.0	12.2	1,190	7542110
	CAPT3743*4A*	D*96VC1005CNA*	34,600	26,200	15.0	12.2	1,175	7542119
	CAPT3743*4A*	D*96VC1205DNA*	34,400	26,000	15.0	12.5	1,200	7542128
	CAPT3743*4A*	D*97MC0603BNA*	34,200	25,800	14.5	12.2	1,250	7542135
	CAPT3743*4A*	D*97MC0803BNA*	34,200	25,800	14.5	12.2	1,250	7542140
	CAPT3743*4A*	D*97MC0804CNA*	34,600	26,200	15.0	12.2	1,190	7542147
	CAPT3743*4A*	D*97MC1005CNA*	34,600	26,200	15.0	12.2	1,175	7542156
	CAPT3743*4A*	D*97MC1205DNA*	34,400	26,000	15.0	12.5	1,200	7542165
	CAPT3743*4A*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7542174
	CAPT3743*4A*	D*96VE1205DNA*	34,400	26,000	15.0	12.5	1,075	7542183
	CAPT3743*4A*+EEP		34,000	25,800	14.5	12.2	1,200	7542034
	CAPT3743*4A*+MBVC1600**-1A*		34,200	25,800	14.5	12.2	1,200	7542035
	CAPT3743*4A*+MBVC1600**-1A*+TXV		34,200	25,800	14.5	12.2	1,200	7542036

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0371A* (cont.)	CAPT3743*4A*+MBVC2000**-1A*		34,200	25,800	14.5	12.2	1,200	7542037
	CAPT3743*4A*+MBVC2000**-1A*+TXV		34,200	25,800	14.5	12.2	1,200	7542038
	CHPF3642C6C*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7542056
	CHPF3642C6C*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7542064
	CHPF3642C6C*+EEP		34,000	25,800	14.0	12.2	1,150	7542039
	CHPF3642C6C*+EEP+TXV		34,000	25,800	14.0	12.2	1,150	7542040
	CHPF3642C6C*+MBVC1600**-1A*		34,000	25,800	14.5	12.2	1,200	7542041
	CHPF3642C6C*+MBVC1600**-1A*+TXV		34,000	25,800	15.0	12.5	1,200	7542042
	CHPF3642C6C*+TXV	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7542051
	CHPF3642C6C*+TXV	D*80HE0805C*A*	33,600	25,400	15.0	12.5	1,210	7542057
	CHPF3642C6C*+TXV	D*80HE1005C*A*	34,000	25,800	15.0	12.5	1,200	7542065
	CHPF3743C6B*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7542043
	CHPF3743C6B*+MBVC1600**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7542044
	CHPF3743C6B*+TXV	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7542071
	CHPF3743C6B*+TXV	D*96VC0403BNA*	34,200	25,800	14.5	12.2	1,200	7542094
	CHPF3743C6B*+TXV	D*96VC0603BNA*	34,400	26,000	14.5	12.2	1,250	7542099
	CHPF3743C6B*+TXV	D*96VC0803BNA*	34,400	26,000	14.5	12.2	1,250	7542104
	CHPF3743C6B*+TXV	D*97MC0603BNA*	34,400	26,000	14.5	12.2	1,250	7542136
	CHPF3743C6B*+TXV	D*97MC0803BNA*	34,400	26,000	14.5	12.2	1,250	7542141
	CHPF3743D6B*	D*80VC0805C*A*	33,600	25,400	14.5	12.2	1,200	7542078
	CHPF3743D6B*	D*80VC1005C*A*	33,400	25,200	14.5	12.2	1,200	7542087
	CHPF3743D6B*	D*96VC0804CNA*	34,600	26,200	14.5	12.2	1,190	7542111
	CHPF3743D6B*	D*96VC1005CNA*	34,600	26,200	14.5	12.2	1,175	7542120
	CHPF3743D6B*	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542129
	CHPF3743D6B*	D*97MC0804CNA*	34,600	26,200	14.5	12.2	1,190	7542148
	CHPF3743D6B*	D*97MC1005CNA*	34,600	26,200	14.5	12.2	1,175	7542157
	CHPF3743D6B*	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542166
	CHPF3743D6B*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7542175
	CHPF3743D6B*	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7542184
	CHPF3743D6B*+EEP		34,600	26,200	14.5	12.2	1,150	7542045
	CHPF3743D6B*+EEP+TXV		34,600	26,200	15.0	12.5	1,150	7542046
	CHPF3743D6B*+TXV	D*80VC0805C*A*	33,600	25,400	15.0	12.5	1,200	7542079
	CHPF3743D6B*+TXV	D*80VC1005C*A*	33,400	25,200	15.0	12.5	1,200	7542088
	CHPF3743D6B*+TXV	D*96VC0804CNA*	34,600	26,200	15.0	12.5	1,190	7542112
	CHPF3743D6B*+TXV	D*96VC1005CNA*	34,600	26,200	15.0	12.5	1,175	7542121
	CHPF3743D6B*+TXV	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542130
	CHPF3743D6B*+TXV	D*97MC0804CNA*	34,600	26,200	15.0	12.5	1,190	7542149
	CHPF3743D6B*+TXV	D*97MC1005CNA*	34,600	26,200	15.0	12.5	1,175	7542158
	CHPF3743D6B*+TXV	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542167
	CHPF3743D6B*+TXV	D*96VE1004CNA*	34,600	26,200	15.0	12.5	1,250	7542176
	CHPF3743D6B*+TXV	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7542185
	CSCF4860N6D*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7542058
	CSCF4860N6D*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7542066
	CSCF4860N6D*	D*80VC0805C*A*	33,600	25,400	14.5	12.2	1,200	7542080
	CSCF4860N6D*	D*80VC1005C*A*	33,400	25,200	14.5	12.2	1,200	7542089
	CSCF4860N6D*	D*96VC0804CNA*	34,600	26,200	14.5	12.2	1,190	7542113
	CSCF4860N6D*	D*96VC1005CNA*	34,600	26,200	14.5	12.2	1,175	7542122
	CSCF4860N6D*	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542131
	CSCF4860N6D*	D*97MC0804CNA*	34,600	26,200	14.5	12.2	1,190	7542150
	CSCF4860N6D*	D*97MC1005CNA*	34,600	26,200	14.5	12.2	1,175	7542159
	CSCF4860N6D*	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542168
	CSCF4860N6D*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7542177
	CSCF4860N6D*	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7542186
	CSCF4860N6D*+EEP		34,600	26,200	14.0	12.2	1,200	7542047

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0371A* (cont.)	CSCF4860N6D*+EEP+TXV		34,600	26,200	14.5	12.2	1,200	7542048
	CSCF4860N6D*+TXV	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7542052
	CSCF4860N6D*+TXV	D*80HE0805C*A*	33,600	25,400	15.0	12.5	1,210	7542059
	CSCF4860N6D*+TXV	D*80HE1005C*A*	34,000	25,800	15.0	12.5	1,200	7542067
	CSCF4860N6D*+TXV	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7542072
	CSCF4860N6D*+TXV	D*80VC0805C*A*	33,600	25,400	15.0	12.5	1,200	7542081
	CSCF4860N6D*+TXV	D*80VC1005C*A*	33,400	25,200	15.0	12.5	1,200	7542090
	CSCF4860N6D*+TXV	D*96VC0403BNA*	34,200	25,800	14.5	12.2	1,200	7542095
	CSCF4860N6D*+TXV	D*96VC0603BNA*	34,400	26,000	14.5	12.2	1,250	7542100
	CSCF4860N6D*+TXV	D*96VC0803BNA*	34,400	26,000	14.5	12.2	1,250	7542105
	CSCF4860N6D*+TXV	D*96VC0804CNA*	34,600	26,200	15.0	12.5	1,190	7542114
	CSCF4860N6D*+TXV	D*96VC1005CNA*	34,600	26,200	15.0	12.5	1,175	7542123
	CSCF4860N6D*+TXV	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542132
	CSCF4860N6D*+TXV	D*97MC0603BNA*	34,400	26,000	14.5	12.2	1,250	7542137
	CSCF4860N6D*+TXV	D*97MC0803BNA*	34,400	26,000	14.5	12.2	1,250	7542142
	CSCF4860N6D*+TXV	D*97MC0804CNA*	34,600	26,200	15.0	12.5	1,190	7542151
	CSCF4860N6D*+TXV	D*97MC1005CNA*	34,600	26,200	15.0	12.5	1,175	7542160
	CSCF4860N6D*+TXV	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7542169
	CSCF4860N6D*+TXV	D*96VE1004CNA*	34,600	26,200	15.0	12.5	1,250	7542178
	CSCF4860N6D*+TXV	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7542187
DX14SA 0421A*	DV36PTCC14A*		34,000	25,800	14.5	12.2	1,100	7542023
	DV42PTCD14A*		34,800	26,400	15.0	12.5	1,120	7542024
	ARUF43D14A*		37,400	29,600	14.0	11.5	1,270	8171755
	ARUF43D14A*+TXV		37,600	29,800	14.0	11.5	1,270	8171756
	ARUF47D14A*		37,600	29,800	14.0	11.5	1,375	7989033
	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8245732
	ASPT48D14A*		38,000	30,000	15.0	12.5	1,385	7542188
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8245733
	ASPT59C14A*		38,000	30,000	14.0	12.0	1,260	8245734
	ASPT60D14A*		38,000	30,000	15.0	12.5	1,385	7542189
	CA*F4860*6D*	D*80HE0805C*A*	38,000	30,000	14.0	11.5	1,425	7542208
	CA*F4860*6D*	D*80HE1005C*A*	38,000	30,000	14.0	11.5	1,425	7542217
	CA*F4860*6D*	D*80HE0805D*A*	38,000	30,000	14.0	11.5	1,425	7542226
	CA*F4860*6D*	D*80VC0805C*A*	38,000	30,000	14.0	11.5	1,400	7542234
	CA*F4860*6D*	D*80VC1005C*A*	38,000	30,000	14.0	11.5	1,370	7542243
	CA*F4860*6D*	D*96VC0804CNA*	38,000	30,000	14.0	11.5	1,385	7542252
	CA*F4860*6D*	D*96VC1005CNA*	38,000	30,000	14.0	11.5	1,300	7542261
	CA*F4860*6D*	D*96VC1205DNA*	38,000	30,000	14.0	11.5	1,425	7542270
	CA*F4860*6D*	D*97MC0804CNA*	38,000	30,000	14.0	11.5	1,425	7542279
	CA*F4860*6D*	D*97MC1005CNA*	38,000	30,000	14.0	11.5	1,300	7542288
	CA*F4860*6D*	D*97MC1205DNA*	38,000	30,000	14.0	11.5	1,300	7542297
	CA*F4860*6D*	D*96VE1004CNA*	38,000	30,000	14.0	11.5	1,275	7542306
	CA*F4860*6D*	D*96VE1205DNA*	38,000	30,000	14.0	11.5	1,400	7542314
	CA*F4860*6D*+EEP		38,000	30,000	14.0	11.5	1,400	7542191
	CA*F4860*6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,400	7542192
	CA*F4860*6D*+MBVC1600**-1A*		38,000	30,000	14.5	11.5	1,300	7542193
	CA*F4860*6D*+MBVC2000**-1A*		38,000	30,000	14.5	11.5	1,300	7542194
	CA*F4860*6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	11.5	1,425	7542209
	CA*F4860*6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	11.5	1,425	7542218
	CA*F4860*6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	11.5	1,425	7542227
	CA*F4860*6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	11.5	1,400	7542235
	CA*F4860*6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	11.5	1,370	7542244
	CA*F4860*6D*+TXV	D*96VC0804CNA*	38,000	30,000	14.5	11.5	1,385	7542253
	CA*F4860*6D*+TXV	D*96VC1005CNA*	38,000	30,000	14.5	11.5	1,300	7542262

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0421A* (cont.)	CA*F4860*6D*+TXV	D*96VC1205DNA*	38,000	30,000	14.5	11.5	1,425	7542271
	CA*F4860*6D*+TXV	D*97MC0804CNA*	38,000	30,000	14.5	11.5	1,425	7542280
	CA*F4860*6D*+TXV	D*97MC1005CNA*	38,000	30,000	14.5	11.5	1,300	7542289
	CA*F4860*6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	11.5	1,300	7542298
	CA*F4860*6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	11.5	1,275	7542307
	CA*F4860*6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	11.5	1,400	7542315
	CA*F4961*6D*	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	7542210
	CA*F4961*6D*	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	7542219
	CA*F4961*6D*	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	7542228
	CA*F4961*6D*	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	7542236
	CA*F4961*6D*	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	7542245
	CA*F4961*6D*	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	7542254
	CA*F4961*6D*	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	7542263
	CA*F4961*6D*	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	7542272
	CA*F4961*6D*	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	7542281
	CA*F4961*6D*	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	7542290
	CA*F4961*6D*	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	7542299
	CA*F4961*6D*	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	7542308
	CA*F4961*6D*	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	7542316
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	7542195
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	7542196
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7542197
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7542198
	CA*F4961*6D*+TXV	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	7542211
	CA*F4961*6D*+TXV	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	7542220
	CA*F4961*6D*+TXV	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	7542229
	CA*F4961*6D*+TXV	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	7542237
	CA*F4961*6D*+TXV	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	7542246
	CA*F4961*6D*+TXV	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	7542255
	CA*F4961*6D*+TXV	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	7542264
	CA*F4961*6D*+TXV	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	7542273
	CA*F4961*6D*+TXV	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	7542282
	CA*F4961*6D*+TXV	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	7542291
	CA*F4961*6D*+TXV	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	7542300
	CA*F4961*6D*+TXV	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	7542309
	CA*F4961*6D*+TXV	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	7542317
	CAPT4961*4A*	D*80HE0805C*A*	39,000	30,800	14.5	11.5	1,425	7542212
	CAPT4961*4A*	D*80HE1005C*A*	39,000	30,800	14.5	11.5	1,425	7542221
	CAPT4961*4A*	D*80VC0805C*A*	39,000	30,800	14.5	11.5	1,425	7542238
	CAPT4961*4A*	D*80VC1005C*A*	39,000	30,800	14.5	11.5	1,370	7542247
	CAPT4961*4A*	D*96VC0804CNA*	39,000	30,800	14.5	11.5	1,385	7542256
	CAPT4961*4A*	D*96VC1005CNA*	39,000	30,800	14.5	11.5	1,300	7542265
	CAPT4961*4A*	D*96VC1205DNA*	39,000	30,800	14.5	11.5	1,450	7542274
	CAPT4961*4A*	D*97MC0804CNA*	39,000	30,800	14.5	11.5	1,430	7542283
	CAPT4961*4A*	D*97MC1005CNA*	39,000	30,800	14.5	11.5	1,300	7542292
	CAPT4961*4A*	D*97MC1205DNA*	39,000	30,800	14.5	11.5	1,300	7542301
	CAPT4961*4A*+EEP		39,000	30,800	14.0	11.5	1,275	7542199
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7542200
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7542201
	CHPF4860D6D*	D*80HE0805C*A*	38,000	30,000	14.5	12.2	1,425	7542213
	CHPF4860D6D*	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	7542222
	CHPF4860D6D*	D*80HE0805D*A*	38,000	30,000	14.5	12.2	1,425	7542230
	CHPF4860D6D*	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	7542239
	CHPF4860D6D*	D*80VC1005C*A*	38,000	30,000	14.5	12.2	1,370	7542248

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0421A* (cont.)	CHPF4860D6D*	D*96VC0804CNA*	38,000	30,000	14.5	12.2	1,385	7542257
	CHPF4860D6D*	D*96VC1005CNA*	38,000	30,000	14.5	12.2	1,300	7542266
	CHPF4860D6D*	D*96VC1205DNA*	38,000	30,000	14.5	12.2	1,425	7542275
	CHPF4860D6D*	D*97MC0804CNA*	38,000	30,000	14.5	12.2	1,425	7542284
	CHPF4860D6D*	D*97MC1005CNA*	38,000	30,000	14.5	12.2	1,300	7542293
	CHPF4860D6D*	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	7542302
	CHPF4860D6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7542310
	CHPF4860D6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7542318
	CHPF4860D6D*+EEP		38,000	30,000	14.0	12.0	1,425	7542202
	CHPF4860D6D*+EEP+TXV		38,000	30,000	14.0	12.2	1,425	7542203
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	7542204
	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	7542205
	CHPF4860D6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	12.2	1,425	7542214
	CHPF4860D6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	7542223
	CHPF4860D6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	12.2	1,425	7542231
	CHPF4860D6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	7542240
	CHPF4860D6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	12.2	1,370	7542249
	CHPF4860D6D*+TXV	D*96VC0804CNA*	38,000	30,000	14.5	12.2	1,385	7542258
	CHPF4860D6D*+TXV	D*96VC1005CNA*	38,000	30,000	14.5	12.2	1,300	7542267
	CHPF4860D6D*+TXV	D*96VC1205DNA*	38,000	30,000	14.5	12.2	1,425	7542276
	CHPF4860D6D*+TXV	D*97MC0804CNA*	38,000	30,000	14.5	12.2	1,425	7542285
	CHPF4860D6D*+TXV	D*97MC1005CNA*	38,000	30,000	14.5	12.2	1,300	7542294
	CHPF4860D6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	7542303
	CHPF4860D6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7542311
	CHPF4860D6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7542319
	CSCF4860N6D*	D*80HE0805C*A*	38,000	30,000	14.5	11.5	1,425	7542215
	CSCF4860N6D*	D*80HE1005C*A*	38,000	30,000	14.5	11.5	1,425	7542224
	CSCF4860N6D*	D*80HE0805D*A*	38,000	30,000	14.5	11.5	1,425	7542232
	CSCF4860N6D*	D*80VC0805C*A*	38,000	30,000	14.5	11.5	1,400	7542241
	CSCF4860N6D*	D*80VC1005C*A*	38,000	30,000	14.5	11.5	1,370	7542250
	CSCF4860N6D*	D*96VC0804CNA*	38,000	30,000	14.5	11.5	1,385	7542259
	CSCF4860N6D*	D*96VC1005CNA*	38,000	30,000	14.5	11.5	1,300	7542268
	CSCF4860N6D*	D*96VC1205DNA*	38,000	30,000	14.5	11.5	1,425	7542277
	CSCF4860N6D*	D*97MC0804CNA*	38,000	30,000	14.5	11.5	1,425	7542286
	CSCF4860N6D*	D*97MC1005CNA*	38,000	30,000	14.5	11.5	1,300	7542295
	CSCF4860N6D*	D*97MC1205DNA*	38,000	30,000	14.5	11.5	1,300	7542304
	CSCF4860N6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7542312
	CSCF4860N6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7542320
	CSCF4860N6D*+EEP		38,000	30,000	14.0	11.5	1,425	7542206
	CSCF4860N6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,425	7542207
	CSCF4860N6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	11.5	1,425	7542216
	CSCF4860N6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	11.5	1,425	7542225
	CSCF4860N6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	11.5	1,425	7542233
	CSCF4860N6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	11.5	1,400	7542242
	CSCF4860N6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	11.5	1,370	7542251
	CSCF4860N6D*+TXV	D*96VC0804CNA*	38,000	30,000	14.5	11.5	1,385	7542260
	CSCF4860N6D*+TXV	D*96VC1005CNA*	38,000	30,000	14.5	11.5	1,300	7542269
	CSCF4860N6D*+TXV	D*96VC1205DNA*	38,000	30,000	14.5	11.5	1,425	7542278
	CSCF4860N6D*+TXV	D*97MC0804CNA*	38,000	30,000	14.5	11.5	1,425	7542287
	CSCF4860N6D*+TXV	D*97MC1005CNA*	38,000	30,000	14.5	11.5	1,300	7542296
	CSCF4860N6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	11.5	1,300	7542305
	CSCF4860N6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7542313
	CSCF4860N6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7542321
	DV48PTCD14A*		38,000	30,000	15.0	12.5	1,310	7542190

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0431A*	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8245736
	ASPT48D14A*		38,000	30,000	15.0	12.5	1,385	8083213
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8245737
	ASPT59C14A*		38,000	30,000	14.0	12.0	1,260	8245735
	ASPT60D14A*		38,000	30,000	15.0	12.5	1,385	8083215
	CA*F4961*6D*	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	8083237
	CA*F4961*6D*	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	8083246
	CA*F4961*6D*	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	8083255
	CA*F4961*6D*	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	8083263
	CA*F4961*6D*	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	8083272
	CA*F4961*6D*	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	8083281
	CA*F4961*6D*	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083290
	CA*F4961*6D*	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	8083298
	CA*F4961*6D*	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	8083307
	CA*F4961*6D*	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083312
	CA*F4961*6D*	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	8083316
	CA*F4961*6D*	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	8083320
	CA*F4961*6D*	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	8083326
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	8083219
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	8083221
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8083223
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8083225
	CA*F4961*6D*+TXV	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	8083239
	CA*F4961*6D*+TXV	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	8083248
	CA*F4961*6D*+TXV	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	8083257
	CA*F4961*6D*+TXV	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	8083266
	CA*F4961*6D*+TXV	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	8083274
	CA*F4961*6D*+TXV	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	8083283
	CA*F4961*6D*+TXV	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083292
	CA*F4961*6D*+TXV	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	8083301
	CA*F4961*6D*+TXV	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	8083309
	CA*F4961*6D*+TXV	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083313
	CA*F4961*6D*+TXV	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	8083317
	CA*F4961*6D*+TXV	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	8083321
	CA*F4961*6D*+TXV	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	8083327
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8083227
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8083229
	CHPF4860D6D*	D*80HE0805C*A*	38,000	30,000	14.5	12.2	1,425	8083242
	CHPF4860D6D*	D*80HE0805D*A*	38,000	30,000	14.5	12.2	1,425	8083250
	CHPF4860D6D*	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	8083259
	CHPF4860D6D*	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	8083268
	CHPF4860D6D*	D*80VC1005C*A*	38,000	30,000	14.5	12.2	1,370	8083277
	CHPF4860D6D*	D*96VC0804CNA*	38,000	30,000	14.5	12.2	1,385	8083285
	CHPF4860D6D*	D*96VC1005CNA*	38,000	30,000	14.5	12.2	1,300	8083294
	CHPF4860D6D*	D*96VC1205DNA*	38,000	30,000	14.5	12.2	1,425	8083303
	CHPF4860D6D*	D*97MC0804CNA*	38,000	30,000	14.5	12.2	1,425	8083310
	CHPF4860D6D*	D*97MC1005CNA*	38,000	30,000	14.5	12.2	1,300	8083314
	CHPF4860D6D*	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	8083318
	CHPF4860D6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	8083322
	CHPF4860D6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	8083328
	CHPF4860D6D*+EEP+TXV		38,000	30,000	14.0	12.2	1,425	8083231
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	8083233
	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	8083235

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0431A* (cont.)	CHPF4860D6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	12.2	1,425	8083244
	CHPF4860D6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	12.2	1,425	8083253
	CHPF4860D6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	8083261
	CHPF4860D6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	8083270
	CHPF4860D6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	12.2	1,370	8083279
	CHPF4860D6D*+TXV	D*96VC0804CNA*	38,000	30,000	14.5	12.2	1,385	8083288
	CHPF4860D6D*+TXV	D*96VC1005CNA*	38,000	30,000	14.5	12.2	1,300	8083296
	CHPF4860D6D*+TXV	D*96VC1205DNA*	38,000	30,000	14.5	12.2	1,425	8083305
	CHPF4860D6D*+TXV	D*97MC0804CNA*	38,000	30,000	14.5	12.2	1,425	8083311
	CHPF4860D6D*+TXV	D*97MC1005CNA*	38,000	30,000	14.5	12.2	1,300	8083315
	CHPF4860D6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	8083319
	CHPF4860D6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	8083323
	CHPF4860D6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	8083329
	CSCF4860N6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	8083324
	CSCF4860N6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	8083330
	CSCF4860N6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	8083325
	CSCF4860N6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	8083331
	DV48PTCD14A*		38,000	30,000	15.0	12.5	1,310	8083218
DX14SA 0481A*	ARUF61D14A*		45,500	32,200	14.0	11.7	1,520	7989034
	ASPT48D14A*		46,000	32,600	14.5	11.7	1,600	7542322
	ASPT59C14A*		45,500	32,200	14.0	12.0	1,430	8245738
	ASPT60D14A*		46,000	32,600	14.5	11.7	1,600	7542323
	ASPT61D14A*		47,000	33,200	14.5	12.2	1,630	8245739
	CA*F4860*6D*	D*96VC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542351
	CA*F4860*6D*	D*96VC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542357
	CA*F4860*6D*	D*96VC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542363
	CA*F4860*6D*	D*97MC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542369
	CA*F4860*6D*	D*97MC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542375
	CA*F4860*6D*	D*97MC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542381
	CA*F4860*6D*+EEP		45,500	32,200	14.0	11.7	1,550	7542326
	CA*F4860*6D*+EEP+TXV		45,500	32,200	14.0	11.7	1,550	7542327
	CA*F4860*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7542328
	CA*F4860*6D*+TXV	D*80HE0805C*A*	45,000	31,800	14.5	11.7	1,480	7542339
	CA*F4860*6D*+TXV	D*80HE1005C*A*	45,500	32,200	14.5	11.7	1,570	7542342
	CA*F4860*6D*+TXV	D*80VC0805C*A*	45,500	32,200	14.5	11.7	1,510	7542345
	CA*F4860*6D*+TXV	D*80VC1005C*A*	45,500	32,200	14.5	11.7	1,530	7542348
	CA*F4860*6D*+TXV	D*96VC0804CNA*	45,000	31,800	14.5	12.0	1,385	7542352
	CA*F4860*6D*+TXV	D*96VC1005CNA*	45,500	32,200	14.5	12.0	1,450	7542358
	CA*F4860*6D*+TXV	D*96VC1205DNA*	45,500	32,200	14.5	12.0	1,450	7542364
	CA*F4860*6D*+TXV	D*97MC0804CNA*	45,000	31,800	14.5	12.0	1,385	7542370
	CA*F4860*6D*+TXV	D*97MC1005CNA*	45,500	32,200	14.5	12.0	1,450	7542376
	CA*F4860*6D*+TXV	D*97MC1205DNA*	45,500	32,200	14.5	12.0	1,450	7542382
	CA*F4860*6D*+TXV	D*96VE1004CNA*	45,000	31,800	14.5	11.7	1,525	7542387
	CA*F4860*6D*+TXV	D*96VE1205DNA*	45,000	31,800	14.5	12.0	1,525	7542389
	CA*F4961*6D*+EEP		46,000	32,600	14.0	11.7	1,550	7542329
	CA*F4961*6D*+EEP+TXV		46,000	32,600	14.0	11.7	1,550	7542330
	CA*F4961*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7542331
	CAPT4961*4A*	D*80HE0805C*A*	45,000	31,800	14.5	11.7	1,480	7544112
	CAPT4961*4A*	D*80HE1005C*A*	45,500	32,200	14.5	11.7	1,570	7544116
	CAPT4961*4A*	D*80VC0805C*A*	45,500	32,200	14.5	11.7	1,510	7544119
	CAPT4961*4A*	D*80VC1005C*A*	45,500	32,200	14.5	11.7	1,530	7544123
	CAPT4961*4A*	D*96VC0804CNA*	45,000	31,800	14.5	11.7	1,385	7544128

See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0481A* (cont.)	CAPT4961*4A*	D*96VC1005CNA*	45,500	32,200	14.5	11.7	1,450	7544133
	CAPT4961*4A*	D*96VC1205DNA*	45,500	32,200	14.5	11.7	1,450	7544139
	CAPT4961*4A*	D*97MC0804CNA*	45,000	31,800	14.5	11.7	1,385	7544144
	CAPT4961*4A*	D*97MC1005CNA*	45,500	32,200	14.5	11.7	1,450	7544150
	CAPT4961*4A*	D*97MC1205DNA*	45,500	32,200	14.5	11.7	1,450	7544156
	CAPT4961*4A*	D*96VE1004CNA*	45,000	31,800	14.5	11.7	1,525	7544161
	CAPT4961*4A*	D*96VE1205DNA*	45,000	31,800	14.5	12.0	1,525	7544164
	CAPT4961*4A*+EEP		46,000	32,600	14.0	11.7	1,550	7542332
	CAPT4961*4A*+MBVC2000**-1A*		45,000	31,800	14.5	11.7	1,595	7542333
	CHPF4860D6D*	D*96VC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542353
	CHPF4860D6D*	D*96VC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542359
	CHPF4860D6D*	D*96VC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542365
	CHPF4860D6D*	D*97MC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542371
	CHPF4860D6D*	D*97MC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542377
	CHPF4860D6D*	D*97MC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542383
	CHPF4860D6D*+EEP		46,000	32,600	14.0	11.7	1,550	7542334
	CHPF4860D6D*+EEP+TXV		46,000	32,600	14.0	11.7	1,550	7542335
	CHPF4860D6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7542336
	CHPF4860D6D*+TXV	D*80HE0805C*A*	45,000	31,800	14.5	11.7	1,480	7542340
	CHPF4860D6D*+TXV	D*80HE1005C*A*	45,500	32,200	14.5	11.7	1,570	7542343
	CHPF4860D6D*+TXV	D*80VC0805C*A*	45,500	32,200	14.5	11.7	1,510	7542346
	CHPF4860D6D*+TXV	D*80VC1005C*A*	45,500	32,200	14.5	11.7	1,530	7542349
	CHPF4860D6D*+TXV	D*96VC0804CNA*	45,000	31,800	14.5	12.0	1,385	7542354
	CHPF4860D6D*+TXV	D*96VC1005CNA*	45,500	32,200	14.5	12.0	1,450	7542360
	CHPF4860D6D*+TXV	D*96VC1205DNA*	45,500	32,200	14.5	12.0	1,450	7542366
	CHPF4860D6D*+TXV	D*97MC0804CNA*	45,000	31,800	14.5	12.0	1,385	7542372
	CHPF4860D6D*+TXV	D*97MC1005CNA*	45,500	32,200	14.5	12.0	1,450	7542378
	CHPF4860D6D*+TXV	D*97MC1205DNA*	45,500	32,200	14.5	12.0	1,450	7542384
	CHPF4860D6D*+TXV	D*96VE1004CNA*	45,000	31,800	14.5	11.7	1,525	7542388
	CHPF4860D6D*+TXV	D*96VE1205DNA*	45,000	31,800	14.5	12.0	1,525	7542390
	CSCF4860N6D*	D*96VC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542355
	CSCF4860N6D*	D*96VC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542361
	CSCF4860N6D*	D*96VC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542367
	CSCF4860N6D*	D*97MC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542373
	CSCF4860N6D*	D*97MC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542379
	CSCF4860N6D*	D*97MC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542385
	CSCF4860N6D*+EEP		45,500	32,200	14.0	11.7	1,550	7542337
	CSCF4860N6D*+EEP+TXV		45,500	32,200	14.0	11.7	1,550	7542338
	CSCF4860N6D*+TXV	D*80HE0805C*A*	45,000	31,800	14.5	11.7	1,480	7542341
	CSCF4860N6D*+TXV	D*80HE1005C*A*	45,000	31,800	14.5	11.7	1,570	7542344
	CSCF4860N6D*+TXV	D*80VC0805C*A*	45,500	32,200	14.5	11.7	1,510	7542347
	CSCF4860N6D*+TXV	D*80VC1005C*A*	45,500	32,200	14.5	11.7	1,530	7542350
	CSCF4860N6D*+TXV	D*96VC0804CNA*	45,000	31,800	14.5	12.0	1,385	7542356
	CSCF4860N6D*+TXV	D*96VC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542362
	CSCF4860N6D*+TXV	D*96VC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542368
	CSCF4860N6D*+TXV	D*97MC0804CNA*	45,000	31,800	14.5	11.7	1,385	7542374
	CSCF4860N6D*+TXV	D*97MC1005CNA*	45,500	32,200	14.5	11.7	1,450	7542380
	CSCF4860N6D*+TXV	D*97MC1205DNA*	45,500	32,200	14.5	11.7	1,450	7542386
	DV48PTCD14A*		46,000	32,600	14.5	11.7	1,550	7542324
	DV60PTCD14A*		46,000	32,600	14.5	11.7	1,590	7542325


See Notes on Page 54.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0601A*	ASPT60D14A*		57,000	40,000	14.0	11.7	1,620	7542391
	ASPT61D14A*		57,000	40,000	14.0	11.7	1,645	7989035
	CA*F4961*6D*	D*96VC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542419
	CA*F4961*6D*	D*97MC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542430
	CA*F4961*6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7542393
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7542394
	CA*F4961*6D*+TXV	D*80HE0805C*A*	57,000	40,000	14.5	11.7	1,525	7542400
	CA*F4961*6D*+TXV	D*80HE0805D*A*	57,000	40,000	14.5	12.0	1,500	7542403
	CA*F4961*6D*+TXV	D*80HE1005C*A*	57,000	40,000	14.5	11.7	1,600	7542406
	CA*F4961*6D*+TXV	D*80VC0805C*A*	57,000	40,000	14.5	11.7	1,560	7542409
	CA*F4961*6D*+TXV	D*80VC1005C*A*	57,000	40,000	14.5	11.7	1,525	7542412
	CA*F4961*6D*+TXV	D*96VC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542415
	CA*F4961*6D*+TXV	D*96VC1205DNA*	57,000	40,000	14.5	12.0	1,575	7542420
	CA*F4961*6D*+TXV	D*97MC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542426
	CA*F4961*6D*+TXV	D*97MC1205DNA*	57,000	40,000	14.5	12.0	1,575	7542431
	CA*F4961*6D*+TXV	D*96VE1205DNA*	57,000	40,000	14.0	11.7	1,525	7542437
	CAPT4961*4A*	D*96VC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542416
	CAPT4961*4A*	D*96VC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542421
	CAPT4961*4A*	D*97MC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542427
	CAPT4961*4A*	D*97MC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542432
	CAPT4961*4A*	D*96VE1205DNA*	56,500	40,000	14.0	11.7	1,525	7542438
	CAPT4961*4A*	D*80HE0805C*A*	57,000	40,000	14.0	11.7	1,525	7544171
	CAPT4961*4A*	D*80HE0805D*A*	57,000	40,000	14.0	12.0	1,500	7544175
	CAPT4961*4A*	D*80HE1005C*A*	57,000	40,000	14.0	11.7	1,600	7544180
	CAPT4961*4A*	D*80VC0805C*A*	57,000	40,000	14.0	11.7	1,560	7544184
	CAPT4961*4A*	D*80VC1005C*A*	57,000	40,000	14.0	11.7	1,525	7544188
	CAPT4961*4A*+EEP		57,000	40,000	14.0	11.7	1,545	7542395
	CHPF4860D6D*	D*96VC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542422
	CHPF4860D6D*	D*97MC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542433
	CHPF4860D6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7542396
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7542397
	CHPF4860D6D*+TXV	D*80HE0805C*A*	57,000	40,000	14.5	11.7	1,525	7542401
	CHPF4860D6D*+TXV	D*80HE0805D*A*	57,000	40,000	14.5	12.0	1,500	7542404
	CHPF4860D6D*+TXV	D*80HE1005C*A*	57,000	40,000	14.5	11.7	1,600	7542407
	CHPF4860D6D*+TXV	D*80VC0805C*A*	57,000	40,000	14.5	11.7	1,560	7542410
	CHPF4860D6D*+TXV	D*80VC1005C*A*	57,000	40,000	14.5	11.7	1,525	7542413
	CHPF4860D6D*+TXV	D*96VC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542417
	CHPF4860D6D*+TXV	D*96VC1205DNA*	57,000	40,000	14.5	12.0	1,575	7542423
	CHPF4860D6D*+TXV	D*97MC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542428
	CHPF4860D6D*+TXV	D*97MC1205DNA*	57,000	40,000	14.5	12.0	1,575	7542434
	CHPF4860D6D*+TXV	D*96VE1205DNA*	57,000	40,000	14.0	11.7	1,525	7542439
	CSCF4860N6D*	D*96VC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542424
	CSCF4860N6D*	D*97MC1205DNA*	56,500	40,000	14.0	11.7	1,575	7542435
	CSCF4860N6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7542398
	CSCF4860N6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7542399
	CSCF4860N6D*+TXV	D*80HE0805C*A*	57,000	40,000	14.5	11.7	1,525	7542402
	CSCF4860N6D*+TXV	D*80HE0805D*A*	57,000	40,000	14.5	12.0	1,500	7542405
	CSCF4860N6D*+TXV	D*80HE1005C*A*	57,000	40,000	14.5	11.7	1,600	7542408
	CSCF4860N6D*+TXV	D*80VC0805C*A*	57,000	40,000	14.5	11.7	1,560	7542411
	CSCF4860N6D*+TXV	D*80VC1005C*A*	57,000	40,000	14.5	11.7	1,525	7542414
	CSCF4860N6D*+TXV	D*96VC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542418
	CSCF4860N6D*+TXV	D*96VC1205DNA*	57,000	40,000	14.5	12.0	1,575	7542425
	CSCF4860N6D*+TXV	D*97MC1005CNA*	57,000	40,000	14.0	11.7	1,525	7542429
	CSCF4860N6D*+TXV	D*97MC1205DNA*	57,000	40,000	14.5	12.0	1,575	7542436
	CSCF4860N6D*+TXV	D*96VE1205DNA*	57,000	40,000	14.0	11.7	1,525	7542440
	DV60PTCD14A*		57,000	40,000	14.0	11.7	1,620	7542392

¹ BTU/h² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Daikin Gas Furnace contains the EEP cooling time delay.

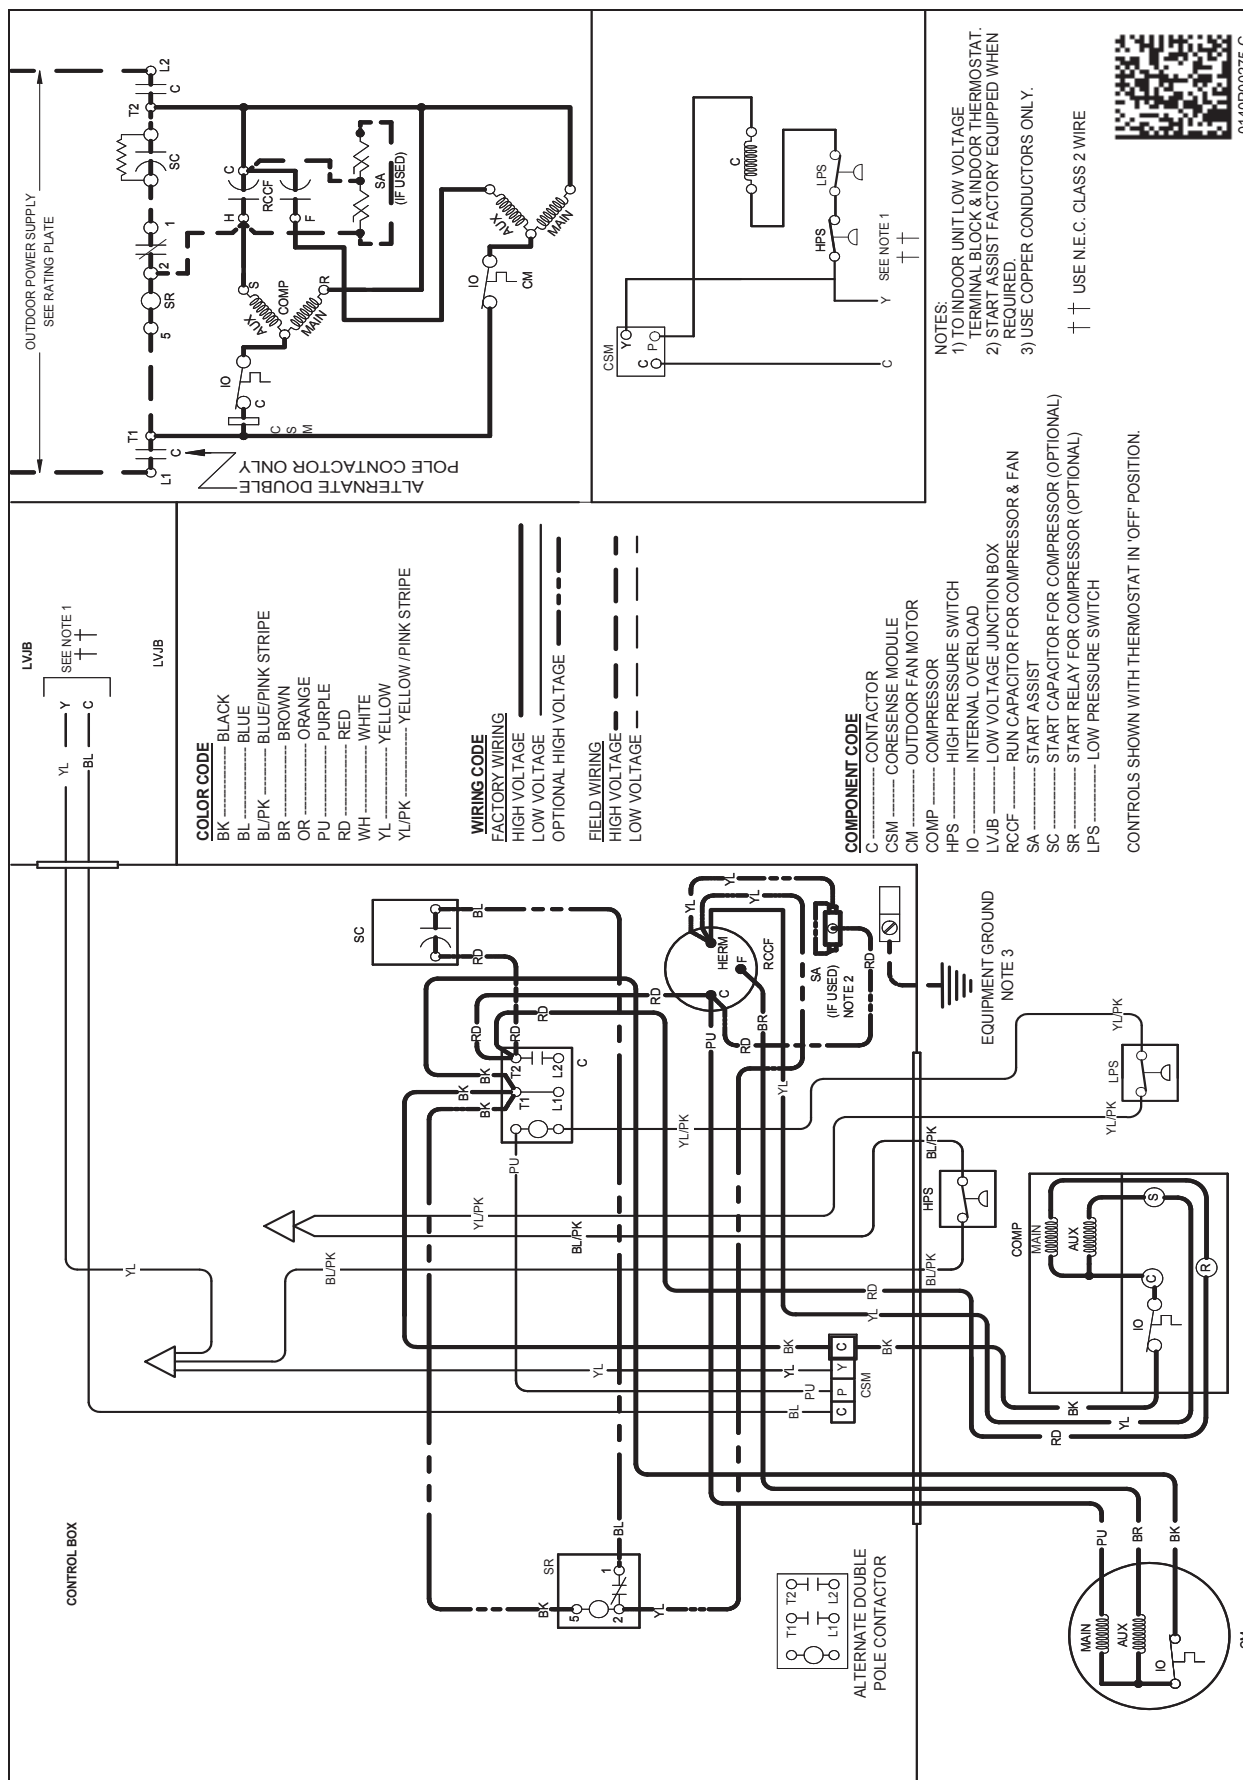

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

